

新普科技股份有限公司
 新世電子(常熟)有限公司
 新普科技(重慶)有限公司
 華普電子(常熟)有限公司

Control NO: LE-CU-15-08-026

UN38.3 Test Report

Recommendations on the TRANSPORT OF DANGEROUS GOODS

(Manual of Tests and Criteria, Fifth revised edition, Amend 1)

Customer: Lenovo

Model: L14M6P21

Rating: 11.1V, 90Wh,8100mAh

Test duration: 2015/7/27~2015/8/25

Approved By	Checked By	Prepared By
Winel Zhao	Winel Zhao	Happy-Gin.

SIMPLO TECHNOLOGY CO., LTD.

ADD: No.471,Sec.2,Pa Teh Rd.,Hu Kou,Hsin Chu,Hsien 303 Taiwan

TEL: +886-3-5695920

FAX: +886-3-5695931

SIMPLO ELECTRONICS (Changshu) LTD.

ADD: No.2 Dong Nan Road,Changshu, Jingsu Province.China

TEL: +86-512-52302255

FAX: +86-512-52302277

SIMPLO ELECTRONICS (CHONGQING) ,LTD.

ADD: No.2 Zongbao Avenue, Shapingba Distnct, Chongqing, China

TEL: +86-23-61718899

FAX: +86-23-61210488

HUAPU TECHNOLOGY (Changshu) CO. ,LTD.

ADD : No.2 Dong Nan Road,Changshu, Jianguo Province.China

TEL: +86-512-52302255

FAX: +86-512-52302277




本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
 The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效，本報告分離使用無效

Page 1 of 7

This test report is valid only to the items, Invalid for separation using.



1. Purpose of the Test:

To test each cell/battery is of the type proved to meet the requirements in the Recommendations on the TRANSPORT OF DANGEROUS GOODS, Manual of Tests and Criteria, Fifth revised edition, Amend 1.


2. Test Quantity:

- 2.1 Four batteries, at first cycle, in fully charged states. (T.1~T.5 test only)
- 2.2 Four batteries, after fifty cycles ending in fully charged states. (T.1~T.5 test only)
- 2.3 Five component cells, at first cycle at 50% of the design rated capacity. (T.6 test only)
- 2.4 Four batteries, at first cycle, in fully charged states. (T.7 test only)
- 2.5 Four batteries, after fifty cycles ending in fully charged states. (T.7 test only)
- 2.6 Ten component cells, at first cycle in fully discharge states. (T.8 test only)
- 2.7 Ten component cells, after fifty cycles ending in fully discharged states. (T.8 test only)

3. Test procedure:

3.1 All detail related test procedure shall be follow Standard Operation Procedure of SMP subjected CW01-5916 Rev.4 issue documentation.

3.2 Test flow shall be follow below statement.

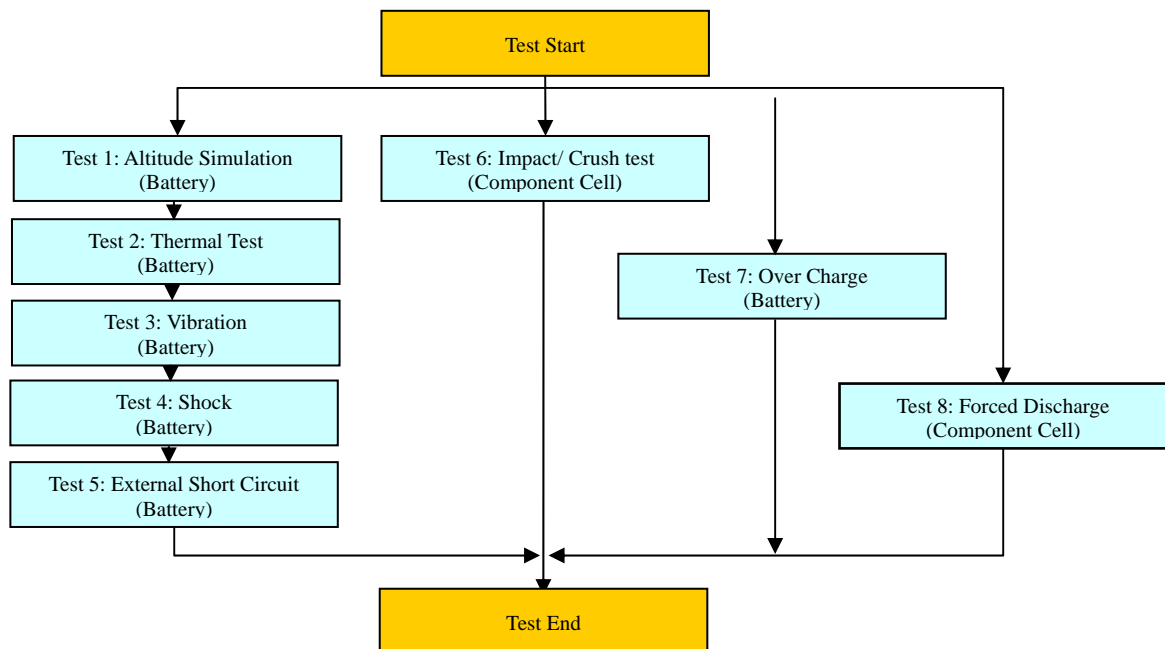



4. Test Result:

4.1 T.1 ~T.4 Test result: **Passed**

- 4.1.1 All batteries could meet the requirement, mass loss was less than 0.1% and residual OCV not less than 90% after the test.
- 4.1.2 No leakage, no venting, no disassembly, no rupture and no fire.

4.2 T.5 Test result: **Passed**

- 4.2.1 All batteries could meet the requirement, external temperature did not exceed 170 .
- 4.2.2 All batteries were no disassembly, no rupture and no fire during the test and within six hours after the test.

4.3 T.6 Test result: **Passed**

- 4.3.1 All component cells could meet the requirement, external temperature did not exceed 170 .
- 4.3.2 All component cells were no disassembly and no fire during the test and within six hours after the test.

4.4 T.7 Test result: **Passed**

- 4.4.1 All batteries could meet no disassembly and no fire during the test and within seven days after the test.

4.5 T.8 Test result: **Passed**

- 4.5.1 All component cells could meet the requirement, no disassembly and no fire during the test and within seven days after the test.

Conclusion: The samples had passed the test items of UN38.3.



新普科技股份有限公司
 新世電子(常熟)有限公司
 新普科技(重慶)有限公司
 華普電子(常熟)有限公司

Control NO: LE-CU-15-08-026

5. Test Equipment:



Address : No.2 Dong Nan Avenue, Changshu, Jingsu Province, China
 TEL: 0512-52302255 FAX: 0512-52302277

Revised date: 2015/8/12

Page 1

Date: 2015/7/27~2015/8/25

Model name: L14M6P21

Test Instruments Reference List									
Used	Instrument ID(New)	Instrument ID(Old)	Instrument Name	Type	Range Used	Manufacturer	Calibration Date Last	Calibration Date Next	Remarks
Pretest									
√	EE01-CA-10.0002	C602M00.50.096	715 learning機	新普科技	18V/8A	新普科技	2014/12/30	2015/12/29	
√	EE03-CA-10.0018	C602M00.50.107	720 learning機	新普科技	Chang:18V/17A Discharge:16V/18A	新普科技	2015/03/09	2016.03/08	
√	EE01-CA-10.0003	C602M00.50.099	715 learning機	新普科技	18V/8A	新普科技	2015/03/09	2016.03/08	
√	EE01-CA-10.0005	C602M00.50.098	715 learning機	新普科技	18V/8A	新普科技	2015/04/08	2016.04/07	
√	EE03-CA-10.0020	C602M00.50.163	720 learning機	新普科技	Chang:18V/17A Discharge:16V/18A	新普科技	2014/10/21	2015/10/20	
Low Pressure Test									
√	EC15-CA-E.00003	C602M00.0462	Altitude	SVT-110	Kpa: 0~99Kpa	HSIN JIANG	2014/09/08	2015.09/07	
√	EA02-CA-10.0002	C602M00.0293	mQ Hitester	3561	R:-10~310mΩ V:-20~20V	HIOKI	2014/9/17	2015.8/16	
√	EF03-CA-100001	C602M00.C0604	Electronic Balance	XS1220M-SCS	1220g±0.001g	CHENGZHUN	2014/10/21	2015/10/20	
√	ED01-CA-100007	C602M00/T0412	Thermo Meter	TA218	T: -10℃~70℃ RH: 25%~98%	KTJ	2014/8/27	2015.8/26	
Thermal Test									
√	EC29-CA-E.00002	C602M00.0671	Thermal Shock	TSK-A4C-150	T:-65℃ to 150℃	KSON	2014/06/09	2015.06/08	
√	EA02-CA-10.0002	C602M00.0293	mQ Hitester	3561	R:-10~310mΩ V:-20~20V	HIOKI	2014/9/17	2015.8/16	
√	EF03-CA-100001	C602M00.C0604	Electronic Balance	XS1220M-SCS	1220g±0.001g	CHENGZHUN	2014/10/21	2015/10/20	
√	ED01-CA-100007	C602M00/T0412	Thermo Meter	TA218	T: -10℃~70℃ RH: 25%~98%	KTJ	2014/8/27	2015.8/26	
Vibration Test									
√	EC08-CA-E.00001	C602M00.0197	Vibration	EM-200F2K-25N50	F:3~2000Hz G:0.2~55G	King Design	2015/3/11	2016.8/10	
√	EC08-CA-E.00002	C602M00.0052	Vibration	EM-200F2K-25N50	F:3~2000Hz G:0.2~55G	King Design	2014/9/24	2015.8/23	
√	EA02-CA-10.0002	C602M00.0293	mQ Hitester	3561	R:-10~310mΩ V:-20~20V	HIOKI	2014/9/17	2015.8/16	
√	EF03-CA-100001	C602M00.C0604	Electronic Balance	XS1220M-SCS	1220g±0.001g	CHENGZHUN	2014/10/21	2015/10/20	
Shock Test									
√	EC17-CA-E.00001	C602M00.0570	Shock	HS 15/45	G:10~2000G	Lansmont	2014/09/08	2015.09/07	
√	EA02-CA-10.0002	C602M00.0293	mQ Hitester	3561	R:-10~310mΩ V:-20~20V	HIOKI	2014/9/17	2015.8/16	
√	EF03-CA-100001	C602M00.C0604	Electronic Balance	XS1220M-SCS	1220g±0.001g	CHENGZHUN	2014/10/21	2015/10/20	
External Short Circuit Test									
√	EA02-CA-10.0002	C602M00.0293	mQ Hitester	3561	R:-10~310mΩ V:-20~20V	HIOKI	2014/9/17	2015.8/16	
√	EA09-CA-10.0004	C602M00.0207	Data logger	34970A	V: 0~300V, T: -150℃~1200℃	Agilent	2014/09/17	2015.09/16	
√	EC26-CA-100023	C602M00.0518	chamber	WIT TH-2P-E	-40℃ to 150℃	WIT	2015/08/10	2016.08/09	
√	ED01-CA-100007	C602M00/T0412	Thermo Meter	TA218	T: -10℃~70℃ RH: 25%~98%	KTJ	2014/8/27	2015.8/26	
Impact Test/Cursh Test									
√	EC17-CA-100001	C602M00/1204	Impact test	100-372	H:60~80cm	JYI SHENG	2014/9/17	2015.8/16	
√	EC23-CA-E.00001	C602M00.0743	Cursh Test	BE-6047	1.0KN~15.0KN	BELL	2014/09/08	2015.09/07	
√	EA09-CA-10.0005	C602M00.0588	Data logger	34970A	V: 0~300V, T: -150℃~1200℃	Agilent	2014/09/17	2015.09/16	
√	ED01-CA-100010	C602M00/T0581	Thermo Meter	TA218	T: -10℃~70℃ RH: 25%~98%	KTJ	2015/8/21	2016.8/20	
Overcharge Test									
√	EA06-CA-E.00003	C602M00.P0779	Power Supply	D56024	0~60V 0~24A	MOTECH	2015/03/11	2016.03/10	
√	EA06-CA-E.00002	C602M00.P0777	Power Supply	D56024	0~60V 0~24A	MOTECH	2015/03/11	2016.03/10	
√	EA06-CA-E.00001	C602M00.P0775	Power Supply	D56024	0~60V 0~24A	MOTECH	2015/03/11	2016.03/10	
√	EA06-CA-E.00004	C602M00.P0781	Power Supply	D56024	0~60V 0~24A	MOTECH	2015/03/11	2016.03/10	
√	ED01-CA-100007	C602M00/T0412	Thermo Meter	TA218	T: -10℃~70℃ RH: 25%~98%	KTJ	2014/8/27	2015.8/26	
Forced Discharge Test									
√	EA06-CA-10.0004	/	Power Supply	E3633A	0~8V,20A,0~20V,10A	AGILENT	2014/9/17	2015.8/16	
√	EA06-CA-10.0016	/	Power Supply	E3633A	0~8V,20A,0~20V,10A	AGILENT	2015/5/9	2016.5/8	
√	EA06-CA-10.0015	C602M00.P0481	Power Supply	E3633A	0~8V,20A,0~20V,10A	AGILENT	2015/5/9	2016.5/8	
√	EA05-CA-10.0006	/	Electronic LOAD	3311D	60V,60A, 300W	PRODIGIT	2015/05/11	2016.05/10	
√	EA05-CA-10.0009	/	Electronic LOAD	3311F	60V,60A, 300W	PRODIGIT	2015/05/11	2016.05/10	
√	EA05-CA-10.0008	C602M00.L0402	Electronic LOAD	3311F	60V,60A, 300W	PRODIGIT	2015/08/12	2016.08/11	

Note 1: DC Voltage: 0.1-1000V; AC Voltage: 0.5-700V at 60Hz, 1kHz; Resistance: 10Ω-10MΩ; DC current: 0.1m A-3A; AC current: 0.01m A-3A at 60Hz, 0.01m A-1A, at 1kHz

本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
 The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效，本報告分離使用無效
 This test report is valid only to the items, Invalid for separation using.



新普科技股份有限公司
 新世電子(常熟)有限公司
 新普科技(重慶)有限公司
 華普電子(常熟)有限公司

Control NO: LE-CU-15-08-026

6. T.1~T8 detail reports:

Control No.:LE-CU-15-08-026

UN 38.3 Test Datasheet

Customer: Lenovo

Model Name:L14M6P21

Test Duration: 2015/7/27~2015/8/25

Reviewer: Wind_Zhao

Test Sample Identification:

Battery					Component Cell			
Used	Sample No.	Sample State	Used	Sample No.	Sample State	Used	Sample No.	Sample State
V	1~4	1 Cycle, Fully charged	V	5~8	50 Cycle, Fully charged	V	1C~5C	1 Cycle, 50% charged
V	9~12	1 Cycle, Fully charged	V	13~16	50 Cycle, Fully charged	V	6C~15C	1 Cycle, 0% charged
		25Cycle, Fully charged			25Cycle, Fully charged	V	16C~25C	50 Cycle, 0% charged

T.1 Altitude Simulation					T.2 Thermal Test				
Start time:2015/08/10 08:20					Start time:2015/08/10 17:40				
Finish time:2015/08/10 17:30					Finish time:2015/08/17 08:20				
Ambient temp.: 22.4 ℃					Ambient temp.: 21.9 ℃				
Operator: Happy_Gu					Operator: Happy_Gu				
Sample No.: 01					Sample No.: 02				
	Before	After	Variation	Results		Before	After	Variation	Results
Mass (g)	490.13	490.12	Mass loss %	0.00%	Mass (g)	490.58	490.58	Mass loss %	0.00%
OCV (V)	12.507	12.491	Residual OCV %	99.87%	OCV (V)	12.483	12.480	Residual OCV %	99.90%
Sample No.: 03					Sample No.: 04				
	Before	After	Variation	Results		Before	After	Variation	Results
Mass (g)	491.05	491.04	Mass loss %	0.00%	Mass (g)	489.87	489.87	Mass loss %	0.00%
OCV (V)	12.506	12.493	Residual OCV %	99.90%	OCV (V)	12.487	12.483	Residual OCV %	99.89%
Sample No.: 05					Sample No.: 06				
	Before	After	Variation	Results		Before	After	Variation	Results
Mass (g)	489.75	489.75	Mass loss %	0.00%	Mass (g)	492.05	492.04	Mass loss %	0.00%
OCV (V)	12.498	12.483	Residual OCV %	99.88%	OCV (V)	12.503	12.487	Residual OCV %	99.87%
Sample No.: 07					Sample No.: 08				
	Before	After	Variation	Results		Before	After	Variation	Results
Mass (g)	491.25	491.25	Mass loss %	0.00%	Mass (g)	490.37	490.36	Mass loss %	0.00%
OCV (V)	12.486	12.471	Residual OCV %	99.88%	OCV (V)	12.492	12.478	Residual OCV %	99.89%

T.3 Vibration				
Start time:2015/08/17 08:40				
Finish time:2015/08/18 08:20				
Ambient temp.: 22.3 ℃				
Operator: Happy_Gu				
Sample No.: 01				
	Before	After	Variation	Results
Mass (g)	490.12	490.11	Mass loss %	0.00%
OCV (V)	12.319	12.298	Residual OCV %	99.83%
Sample No.: 03				
	Before	After	Variation	Results
Mass (g)	491.04	491.03	Mass loss %	0.00%
OCV (V)	12.316	12.297	Residual OCV %	99.85%
Sample No.: 05				
	Before	After	Variation	Results
Mass (g)	489.75	489.74	Mass loss %	0.00%
OCV (V)	12.312	12.291	Residual OCV %	99.83%
Sample No.: 07				
	Before	After	Variation	Results
Mass (g)	491.25	491.24	Mass loss %	0.00%
OCV (V)	12.298	12.275	Residual OCV %	99.81%

T.3 Vibration				
Start time:2015/08/17 08:40				
Finish time:2015/08/18 08:20				
Ambient temp.: 22.3 ℃				
Operator: Happy_Gu				
Sample No.: 02				
	Before	After	Variation	Results
Mass (g)	490.58	490.58	Mass loss %	0.00%
OCV (V)	12.301	12.282	Residual OCV %	99.85%
Sample No.: 04				
	Before	After	Variation	Results
Mass (g)	489.86	489.86	Mass loss %	0.00%
OCV (V)	12.309	12.285	Residual OCV %	99.81%
Sample No.: 06				
	Before	After	Variation	Results
Mass (g)	492.04	492.04	Mass loss %	0.00%
OCV (V)	12.309	12.289	Residual OCV %	99.84%
Sample No.: 08				
	Before	After	Variation	Results
Mass (g)	490.36	490.36	Mass loss %	0.00%
OCV (V)	12.304	12.281	Residual OCV %	99.81%

本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
 The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效，本報告分離使用無效
 This test report is valid only to the items, Invalid for separation using.



新普科技股份有限公司
 新世電子(常熟)有限公司
 新普科技(重慶)有限公司
 華普電子(常熟)有限公司

Control NO: LE-CU-15-08-026

T.4 Shock					Start time:2015/08/18 08:40	Ambient temp.: 23.1 ℃	Operator: Happy_Gu				
Sample No.: 01					Sample No.: 02						
	Before	After	Variation		Results		Before	After	Variation		Results
Mass (g)	490.11	490.10	Mass loss %	0.00%	P	Mass (g)	490.58	490.57	Mass loss %	0.00%	P
OCV (V)	12.298	12.283	Residual OCV %	99.88%		OCV (V)	12.282	12.268	Residual OCV %	99.89%	
Sample No.: 03					Sample No.: 04						
Mass (g)	491.03	491.03	Mass loss %	0.00%	P	Mass (g)	489.86	489.86	Mass loss %	0.00%	P
OCV (V)	12.297	12.280	Residual OCV %	99.88%		OCV (V)	12.285	12.270	Residual OCV %	99.88%	
Sample No.: 05					Sample No.: 06						
Mass (g)	489.74	489.74	Mass loss %	0.00%	P	Mass (g)	492.04	492.03	Mass loss %	0.00%	P
OCV (V)	12.291	12.277	Residual OCV %	99.89%		OCV (V)	12.289	12.275	Residual OCV %	99.89%	
Sample No.: 07					Sample No.: 08						
Mass (g)	491.24	491.24	Mass loss %	0.00%	P	Mass (g)	490.36	490.35	Mass loss %	0.00%	P
OCV (V)	12.275	12.262	Residual OCV %	99.89%		OCV (V)	12.281	12.265	Residual OCV %	99.87%	

T.5 External Short Circuit										Start time:2015/08/18 13:50	Ambient temp.: 21.8 ℃	Operator: Happy_Gu											
Sample No.: 01										Sample No.: 02		Sample No.: 03		Sample No.: 04		Sample No.: 05		Sample No.: 06		Sample No.: 07		Sample No.: 08	
Resistance (<100mΩ)	59.7		56.4		55.8		57.2		56.8		56.2		56.9		58.4								
OCV before test/ after short circuit (V)	12.283	0.000	12.268	0.000	12.280	0.000	12.270	0.000	12.277	0.000	12.275	0.000	12.262	0.000	12.265	0.000							
Max Temp. (< 170℃)	54.8		55.1		55.2		54.8		54.9		55.5		55.6		55.2								
Results	P		P		P		P		P		P		P		P								

T.6 Impact / Crush (Component Cell)						Start time:2015/07/28 08:30	Ambient temp.: 21.4 ℃	Operator: Happy_Gu					
Sample No.: 01C						Sample No.: 02C		Sample No.: 03C		Sample No.: 04C		Sample No.: 05C	
OCV before test (V)	3.701		3.704		3.696		3.699		3.700				
Max Temp. (< 170℃)	30.8		32.5		29.6		30.3		29.1				
Results	P		P		P		P		P				

T.7 Overcharge									Start time:2015/08/10 10:20	Ambient temp.: 23.4 ℃	Operator: Happy_Gu					
Sample No.: 09		Sample No.: 10		Sample No.: 11		Sample No.: 12		Sample No.: 13		Sample No.: 14		Sample No.: 15		Sample No.: 16		
OCV before test (V)	12.501		12.504		12.492		12.497		12.490		12.500		12.491		12.490	
Results	P		P		P		P		P		P		P		P	

本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
 The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效，本報告分離使用無效
 This test report is valid only to the items, Invalid for separation using.



新普科技股份有限公司
 新世電子(常熟)有限公司
 新普科技(重慶)有限公司
 華普電子(常熟)有限公司

Control NO: LE-CU-15-08-026

T.8 Forced Discharge (Component Cell) Start time:2015/08/11 08:30 Ambient temp.: 21.6 Operator: Happy_Gu
 Finish time:2015/08/22 13:30

	Sample No.: 06C	Sample No.: 07C	Sample No.: 08C	Sample No.: 09C	Sample No.: 10C
OCV before test(V)	3.394	3.386	3.390	3.388	3.400
Results	P	P	P	P	P
	Sample No.: 11C	Sample No.: 12C	Sample No.: 13C	Sample No.: 14C	Sample No.: 15C
OCV before test(V)	3.390	3.393	3.396	3.388	3.392
Results	P	P	P	P	P
	Sample No.: 16C	Sample No.: 17C	Sample No.: 18C	Sample No.: 19C	Sample No.: 20C
OCV before test(V)	3.371	3.378	3.382	3.385	3.383
Results	P	P	P	P	P
	Sample No.: 21C	Sample No.: 22C	Sample No.: 23C	Sample No.: 24C	Sample No.: 25C
OCV before test(V)	3.375	3.376	3.379	3.376	3.382
Results	P	P	P	P	P

7. Test sample:



本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
 The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效，本報告分離使用無效
 This test report is valid only to the items, Invalid for separation using.