



新普科技股份有限公司
 新世電子(常熟)有限公司
 新普科技(重慶)有限公司
 華普電子(常熟)有限公司

Control Number: SLEU-1903002

Lithium-ion Battery UN38.3 Test Report

Recommendations on the TRANSPORT OF DANGEROUS GOODS

(Manual of Tests and Criteria, Sixth revised edition)

Customer: Lenovo

Model: L19M4PD2

Rating: 15.36V, Typical Capacity 4060mAh/ 62.3Wh

Rated Capacity 3985mAh/ 61.2Wh

Issue date: 2019/03/25

Approved By	Checked By	Prepared By

SIMPLO TECHNOLOGY CO., LTD.

ADD : No.471, Sec.2, Pa Teh Rd., Hu Kou, Hsin Chu Hsien 303, Taiwan

TEL: +886-3-5695920

FAX: +886-3-5695931



SIMPLO TECHNOLOGY (CHANGSHU) INC.

ADD : No.888 Dongnan Avenue, Changshu New & Hi-Tech Industrial Development Zone, Changshu, Jiangsu, China

TEL: +86-512-52302255

FAX: +86-512-52302277



SIMPLO TECHNOLOGY (CHONGQING) INC.

ADD : No.2 Zongbao Avenue, Shapingba District, ChongQing, China

TEL: +86-23-61718899

FAX: +86-23-61210488



HUAPU TECHNOLOGY (CHANGSHU) INC.

ADD : No.888 Dongnan Avenue, Changshu New & Hi-Tech Industrial Development Zone, Changshu, Jiangsu, China

TEL: +86-512-52302255

FAX: +86-512-52302277



Form No. : W11-002-B04

本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
 The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效，本報告分離使用無效

Page 1 of 7

This test report is valid only to the items, Invalid for separation using.



1. Purpose of the Test :

To test each cell/battery is of the type proved to meet the requirements in United Nations Recommendations on the TRANSPORT OF DANGEROUS GOODS, Manual of Tests and Criteria, Sixth revised edition, Section 38.3.


2. Test Quantity :

- 2.1 Four batteries, at first cycle, in fully charged states. (For T.1~T.5)
- 2.2 Four batteries, after 50 cycles ending in fully charged states. (For T.1~T.5)
- 2.3 Five component cells, at first cycle at 50% of the design rated capacity. (For T.6)
- 2.4 Four batteries, at first cycle, in fully charged states. (For T.7)
- 2.5 Four batteries, after 50 cycles ending in fully charged states. (For T.7)
- 2.6 Ten component cells, at first cycle in fully discharge states. (For T.8)
- 2.7 Ten component cells, after 50 cycles ending in fully discharged states. (For T.8)

3. Test Procedure :

3.1 All detailed test procedures must be based on United Nations Recommendations on the TRANSPORT OF DANGEROUS GOODS, Manual of Tests and Criteria, Sixth revised edition, Section 38.3.

3.2 Test flow shall be followed as below.

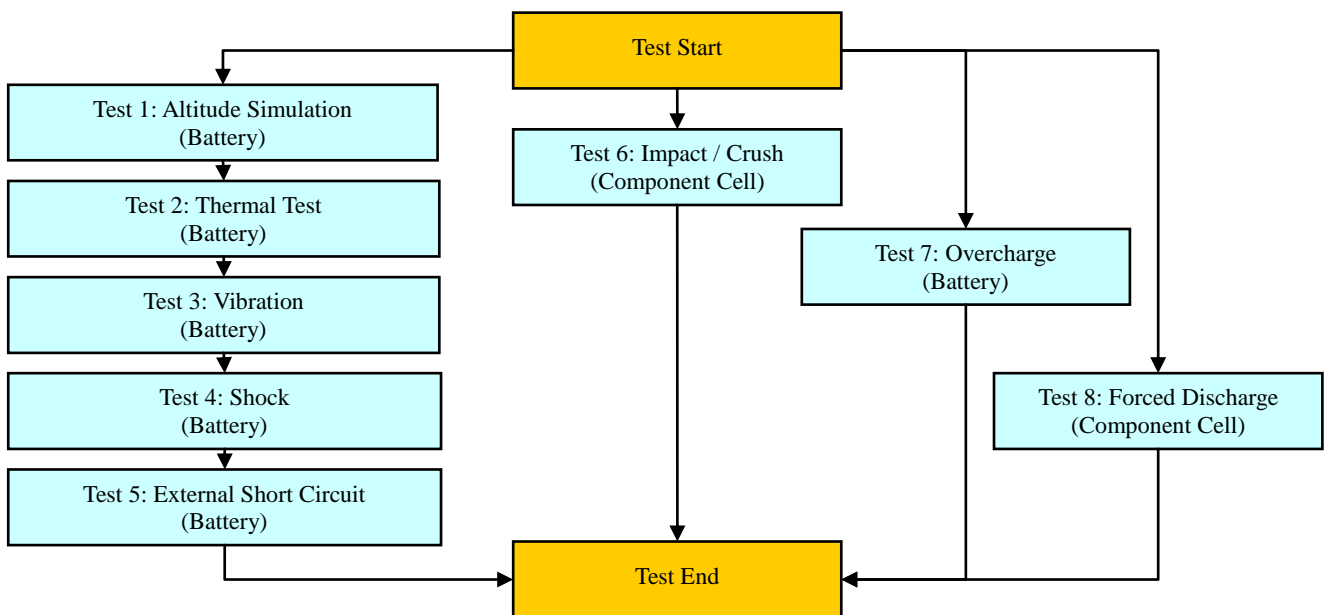



4. Test Result :

4.1 T.1 ~T.4 Test result: **Passed**

- 4.1.1 All batteries could meet the requirement of Table 38.3.1 Mass loss limit ($M < 1g$: 0.5% ; $1g \leq M \leq 75g$: 0.2% ; $M > 75g$: 0.1%) and residual OCV not less than 90% after the test.
- 4.1.2 No leakage, no venting, no disassembly, no rupture and no fire.

4.2 T.5 Test result: **Passed**

- 4.2.1 All batteries could meet the requirement, external temperature did not exceed 170°C .
- 4.2.2 All batteries were no disassembly, no rupture and no fire during the test and within six hours after the test.

4.3 T.6 Test result: **Passed**

- 4.3.1 All component cells could meet the requirement, external temperature did not exceed 170°C .
- 4.3.2 All component cells were no disassembly and no fire during the test and within six hours after the test.

4.4 T.7 Test result: **Passed**

- 4.4.1 All batteries could meet no disassembly and no fire during the test and within seven days after the test.

4.5 T.8 Test result: **Passed**

- 4.5.1 All component cells could meet the requirement, no disassembly and no fire during the test and within seven days after the test.

Conclusion: The samples had passed the test items of UN38.3.



新普科技股份有限公司
 新世電子(常熟)有限公司
 新普科技(重慶)有限公司
 華普電子(常熟)有限公司

Control Number: SLEU-1903002

5. Test Equipment :

SMP SIMPLO TECHNOLOGY CO., LTD.

Address : No.471, Sec.2, Pa Teh Rd., Hu Kou, Hsin Chu Hsien 303, Taiwan

TEL: +886-3-5695920; FAX: +886-3-5695931

Revised Date: 2019-03-25

Test Instruments Reference List								
Used	Instrument ID	Instrument Name	Type	Range of use	Manufacturer	Calibration Date_Last	Calibration Date_Next	Remarks
Pretest								
V	ML-761	Learning	715C	0~18V 0~8A	SMP	2019/2/26	2020/2/26	
V	ML-762	Learning	715C	0~18V 0~8A	SMP	2019/1/3	2020/1/3	
V	ML-763	Learning	715C	0~18V 0~8A	SMP	2019/2/26	2020/2/26	
V	ML-764	Learning	715C	0~18V 0~8A	SMP	2019/1/3	2020/1/3	
	ML-925	Learning	750C8	0~60V 0~30A	SMP	2019/1/3	2020/1/3	
T.1 Altitude Simulation								
V	ML-522	Altitude	SVT-120	Kpa:30~90	HSIN JIANG	2018/7/18	2019/7/18	
V	ML-257	Multimeter	HP 34401A	Note 1	Agilent	2019/2/26	2020/2/26	
V	ML-494	Electronic Balance	XS1220M-SCS	1-1220 gf	PRECISA	2018/7/18	2019/7/18	
	ML-523	Electronic Balance	MTW-30K	30*0.005Kg		2018/9/12	2019/9/12	
V	ML-550	Data Logger	313	15~35 °C; 30~80 %RH	CENTER	2018/9/18	2019/9/18	
T.2 Thermal Test								
V	ML-789	Thermal Shock	GTST-080-65-AW	T:-40 to 100°C	GF	2019/1/3	2020/1/3	
V	ML-257	Multimeter	HP 34401A	note 1	Agilent	2019/2/26	2020/2/26	
V	ML-494	Electronic Balance	XS1220M-SCS	1-1220 gf	PRECISA	2018/7/18	2019/7/18	
	ML-523	Electronic Balance	MTW-30K	30*0.005Kg		2018/9/12	2019/9/12	
V	ML-551	Data Logger	313	15~35 °C; 30~80 %RH	CENTER	2018/9/18	2019/9/18	
T.3 Vibration								
V	ML-233	Vibration	KD-9636-EM-300F2K-30N80	F:5~2000Hz G:0.2~20G	King Design	2018/8/24	2019/8/24	
V	ML-257	Multimeter	HP 34401A	note 1	Agilent	2019/2/26	2020/2/26	
V	ML-494	Electronic Balance	XS1220M-SCS	1-1220 gf	PRECISA	2018/7/18	2019/7/18	
	ML-523	Electronic Balance	MTW-30K	30*0.005Kg		2018/9/12	2019/9/12	
V	ML-552	Data Logger	313	15~35 °C; 30~80 %RH	CENTER	2018/9/18	2019/9/18	
T.4 Shock								
V	ML-056	Shock	DP-1200-25	G:10~600G	King Design	2018/8/24	2019/8/24	
V	ML-257	Multimeter	HP 34401A	note 1	Agilent	2019/2/26	2020/2/26	
V	ML-494	Electronic Balance	XS1220M-SCS	1-1220 gf	PRECISA	2018/7/18	2019/7/18	
	ML-523	Electronic Balance	MTW-30K	30*0.005Kg		2018/9/12	2019/9/12	
V	ML-551	Data Logger	313	15~35 °C; 30~80 %RH	CENTER	2018/9/18	2019/9/18	
T.5 External Short Circuit								
V	ML-894	Battery Hister	BT3562	1mΩ ~ 30kΩ	HIOKI	2018/6/11	2019/6/11	
V	ML-459	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 150°C	Yokogawa	2018/9/12	2019/9/12	
V	ML-460	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 150°C	Yokogawa	2018/9/12	2019/9/12	
V	ML-521	Oven	9031	30~80 °C	YEOW LONG	2018/9/12	2019/9/12	
V	ML-549	Data Logger	313	15~35 °C; 30~80 %RH	CENTER	2018/9/18	2019/9/18	
T.6 Impact / Crush								
V	ML-339	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 150°C	Yokogawa	2018/5/17	2019/5/17	
	ML-076	Impact Tester			JYI SHENG	2019/1/3	2020/1/3	
	ML-553	Crush Tester	BCT-01		Simplo	2018/5/16	2019/5/16	
V	ML-866	Crush Tester	M0654		JYI SHENG	2018/4/9	2019/4/9	
	ML-459	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 150°C	Yokogawa	2018/9/12	2019/9/12	

Form No. : W11-002-B04

本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
 The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效,本報告分離使用無效

This test report is valid only to the items, Invalid for separation using.



新普科技股份有限公司
 新世電子(常熟)有限公司
 新普科技(重慶)有限公司
 華普電子(常熟)有限公司

Control Number: SLEU-1903002

SMP SIMPLO TECHNOLOGY CO., LTD.

Address : No.471, Sec.2, Pa Teh Rd., Hu Kou, Hsin Chu Hsien 303, Taiwan
 TEL: +886-3-5695920; FAX: +886-3-5695931

Revised Date: 2019-03-25

Test Instruments Reference List								
Used	Instrument ID	Instrument Name	Type	Range of use	Manufacturer	Calibration Date_Last	Calibration Date_Next	Remarks
T.7 Overcharge								
	ML-482	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2018/5/17	2019/5/17	
	ML-483	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2018/5/17	2019/5/17	
	ML-484	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2018/5/17	2019/5/17	
	ML-486	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2018/5/17	2019/5/17	
	ML-487	Programmable DC Source	DS6024	1-60 Vdc, 0.3-24A	MOTECH	2018/5/17	2019/5/17	
V	ML-549	Data Logger	313	15-35 °C; 30-80 %RH	CENTER	2018/9/18	2019/9/18	
	ML-459	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 150 °C	Yokogawa	2018/9/12	2019/9/12	
	ML-460	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 150 °C	Yokogawa	2018/9/12	2019/9/12	
V	ML-918	Overcharge & Forced discharge tester	T901	3-30 Vdc, Charge: 0.05-20A Discharge: 0.02-10A	SMP	2018/5/17	2019/5/17	
T.8 Forced Discharge								
	ML-132	Electronic Load	3311C	60V,55A, 300W	Prodigit	2019/2/26	2020/2/26	
	ML-133	Electronic Load	3311C	60V,55A, 300W	Prodigit	2019/2/26	2020/2/26	
	ML-136	Electronic Load	3311C	60V,55A, 300W	Prodigit	2019/2/26	2020/2/26	
	ML-192	Electronic Load	3311C	60V,55A, 300W	Prodigit	2019/2/26	2020/2/26	
	ML-269	Electronic Load	3311C	60V,55A, 300W	Prodigit	2019/2/26	2020/2/26	
	ML-532	DC Electronic Load	33511-01	120V, 240A, 3600W	Prodigit	2018/7/18	2019/7/18	
	ML-482	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2018/5/17	2019/5/17	
	ML-483	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2018/5/17	2019/5/17	
	ML-484	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2018/5/17	2019/5/17	
	ML-486	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2018/5/17	2019/5/17	
	ML-487	Programmable DC Source	DS6024	1-60 Vdc, 0.3-24A	MOTECH	2018/5/17	2019/5/17	
V	ML-549	Data Logger	313	15-35 °C; 30-80 %RH	CENTER	2018/9/18	2019/9/18	
	ML-459	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 150 °C	Yokogawa	2018/9/12	2019/9/12	
	ML-460	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 150 °C	Yokogawa	2018/9/12	2019/9/12	
V	ML-918	Overcharge & Forced discharge tester	T901	3-30 Vdc, Charge: 0.05-20A Discharge: 0.02-10A	SMP	2018/5/17	2019/5/17	
Note 1: DC Voltage: 0.1-1000V; AC Voltage: 0.5-700V at 60Hz, 1kHz; Resistance: 10Ω-10MΩ; DC Current: 0.1mA-3A; AC Current: 0.01-3A at 60Hz, 0.01-1A, at 1kHz.								

Form No. : W11-002-B04

本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
 The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效,本報告分離使用無效
 This test report is valid only to the items, Invalid for separation using.



新普科技股份有限公司
 新世電子(常熟)有限公司
 新普科技(重慶)有限公司
 華普電子(常熟)有限公司

Control Number: SLEU-1903002

6. T.1~T.8 Detail Reports:

UN 38.3 Test Datasheet UN38.3/ST/SG/AC.10/11/Rev.6

Control Number: SLEU-1903002	Customer: Lenovo	Model Name: L19M4PD2	SMP Project Name: S740-14
Pack P/N: 928QA287H (A)(B)	Configuration: 4S1P	Test Duration: 2019/02/23~2019/03/25	Reviewer: Esmond

Test Sample Identification: Large Battery Small Battery Single-cell Battery

Battery Pack					Component Cell			
Used	Sample No.	Sample State	Used	Sample No.	Sample State	Used	Sample No.	Sample State
V	01-04	1 Cycle, Fully charged	V	05-08	50 Cycles, Fully charged	V	01C-05C	1 Cycle, 50% SOC
V	09-12	1 Cycle, Fully charged	V	13-16	50 Cycles, Fully charged	V	06C-15C	1 Cycle, Fully discharged (0% SOC)
		25Cycles, Fully charged			25 Cycles, Fully charged	V	16C-25C	50 Cycles, Fully discharged (0% SOC)

T.1 Altitude Simulation

Start time: 2019/03/11 09:30	Ambient temp.: 22.0 °C								Operator: Mia	
Finish time: 2019/03/11 16:20	Sample 01	Sample 02	Sample 03	Sample 04	Sample 05	Sample 06	Sample 07	Sample 08		
OCV (V)	Before	17.119	17.109	17.113	17.116	17.108	17.117	17.120	17.115	
	After	17.097	17.088	17.089	17.097	17.088	17.095	17.096	17.096	
	Residual OCV %	99.87%	99.88%	99.86%	99.89%	99.88%	99.87%	99.86%	99.89%	
Mass (g)	Before	252.901	251.639	252.438	251.878	252.319	252.740	251.985	251.841	
	After	252.901	251.636	252.433	251.877	252.319	252.736	251.983	251.841	
	Mass loss %	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	
Results	P	P	P	P	P	P	P	P	P	

T.2 Thermal Test

Start time: 2019/03/11 16:40	Ambient temp.: 21.7 °C								Operator: Mia	
Finish time: 2019/03/18 09:10	Sample 01	Sample 02	Sample 03	Sample 04	Sample 05	Sample 06	Sample 07	Sample 08		
OCV (V)	Before	17.097	17.088	17.089	17.097	17.088	17.095	17.096	17.096	
	After	16.914	16.900	16.897	16.912	16.900	16.904	16.907	16.914	
	Residual OCV %	98.93%	98.90%	98.88%	98.92%	98.90%	98.88%	98.89%	98.94%	
Mass (g)	Before	252.901	251.636	252.433	251.877	252.319	252.736	251.983	251.841	
	After	252.886	251.617	252.413	251.863	252.303	252.723	251.966	251.823	
	Mass loss %	0.01%	0.01%	0.01%	0.01%	0.01%	0.01%	0.01%	0.01%	
Results	P	P	P	P	P	P	P	P	P	

T.3 Vibration

Start time: 2019/03/18 09:30	Ambient temp.: 22.2 °C								Operator: Mia	
Finish time: 2019/03/19 09:00	Sample 01	Sample 02	Sample 03	Sample 04	Sample 05	Sample 06	Sample 07	Sample 08		
OCV (V)	Before	16.914	16.900	16.897	16.912	16.900	16.904	16.907	16.914	
	After	16.894	16.878	16.878	16.894	16.877	16.886	16.890	16.895	
	Residual OCV %	99.88%	99.87%	99.89%	99.89%	99.86%	99.89%	99.90%	99.89%	
Mass (g)	Before	252.886	251.617	252.413	251.863	252.303	252.723	251.966	251.823	
	After	252.884	251.616	252.411	251.863	252.300	252.722	251.962	251.823	
	Mass loss %	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	
Results	P	P	P	P	P	P	P	P	P	

T.4 Shock

Start time: 2019/03/19 09:20	Ambient temp.: 22.0 °C								Operator: Mia	
Finish time: 2019/03/19 12:50	Sample 01	Sample 02	Sample 03	Sample 04	Sample 05	Sample 06	Sample 07	Sample 08		
OCV (V)	Before	16.894	16.878	16.878	16.894	16.877	16.886	16.890	16.895	
	After	16.879	16.860	16.864	16.875	16.862	16.869	16.873	16.881	
	Residual OCV %	99.91%	99.89%	99.92%	99.89%	99.91%	99.90%	99.90%	99.92%	
Mass (g)	Before	252.884	251.616	252.411	251.863	252.300	252.722	251.962	251.823	
	After	252.882	251.613	252.411	251.860	252.300	252.720	251.962	251.820	
	Mass loss %	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	
Results	P	P	P	P	P	P	P	P	P	

Form No. : W11-002-B04

本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
 The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效，本報告分離使用無效

This test report is valid only to the items, Invalid for separation using.



新普科技股份有限公司
 新世電子(常熟)有限公司
 新普科技(重慶)有限公司
 華普電子(常熟)有限公司

Control Number: SLEU-1903002

T.5 External Short Circuit

Start time: 2019/03/19 13:10	Ambient temp.: 21.8 °C					Operator: Mia			
Finish time: 2019/03/20 09:40	Sample 01	Sample 02	Sample 03	Sample 04	Sample 05	Sample 06	Sample 07	Sample 08	
OCV (V)	Before	16.879	16.860	16.864	16.875	16.862	16.869	16.873	16.881
	After	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Resistance (<100mΩ)		60.3	57.8	59.0	56.4	58.6	57.3	60.7	61.3
Max Temp. (< 170°C)		57.6	57.4	57.6	57.9	57.2	57.5	57.3	57.4
Results		P	P	P	P	P	P	P	P

T.6 Impact / Crush (Component Cell)

UN38.3/ST/SG/AC.10/11/Rev.6

- Impact - Cylindrical cells not less than 18.0 mm in diameter
- Crush - Prismatic, pouch, coin/button cells and cylindrical cells less than 18.0 mm in diameter

Start time: 2019/03/13 09:10	Ambient temp.: 21.6 °C				Operator: Mia	
Finish time: 2019/03/14 08:50	Sample 01C	Sample 02C	Sample 03C	Sample 04C	Sample 05C	
Initial OCV (V)	3.795	3.805	3.807	3.801	3.798	
Max Temp. (< 170°C)	23.4	23.8	24.1	23.7	24.0	
Results	P	P	P	P	P	

T.7 Overcharge

Start time: 2019/03/15 09:00	Ambient temp.: 21.9 °C					Operator: Mia			
Finish time: 2019/03/25 08:30	Sample 09	Sample 10	Sample 11	Sample 12	Sample 13	Sample 14	Sample 15	Sample 16	
Initial OCV (V)	17.122	17.107	17.112	17.119	17.105	17.120	17.118	17.114	
Results	P	P	P	P	P	P	P	P	

T.8 Forced Discharge (Component Cell)

Start time: 2019/03/14 09:10	Ambient temp.: 21.8 °C								Operator: Mia	
Finish time: 2019/03/22 11:30	Sample 06C	Sample 07C	Sample 08C	Sample 09C	Sample 10C	Sample 11C	Sample 12C	Sample 13C		
Initial OCV (V)	3.433	3.415	3.428	3.440	3.436	3.417	3.421	3.439		
Results	P	P	P	P	P	P	P	P		
Sample No.	Sample 14C	Sample 15C	Sample 16C	Sample 17C	Sample 18C	Sample 19C	Sample 20C	Sample 21C		
Initial OCV (V)	3.442	3.410	3.432	3.446	3.412	3.449	3.423	3.428		
Results	P	P	P	P	P	P	P	P		
Sample No.	Sample 22C	Sample 23C	Sample 24C	Sample 25C						
Initial OCV (V)	3.415	3.422	3.430	3.444						
Results	P	P	P	P						

7. Test Sample:



Form No. : W11-002-B04

本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
 The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效，本報告分離使用無效
 This test report is valid only to the items, Invalid for separation using.