



中国认可
国际互认
检测
TESTING
CNAS L3767

检测报告

Test Report

报告编号 (Report No.): RTN-UN-1607-031

样 品 名 称: 锂离子电池
Sample Name: Li-ion battery
样 品 型 号: HG40
Sample Model: HG40
委 托 单 位: 东莞新能源科技有限公司
Consignor: Dongguan Amperex Technology Limited

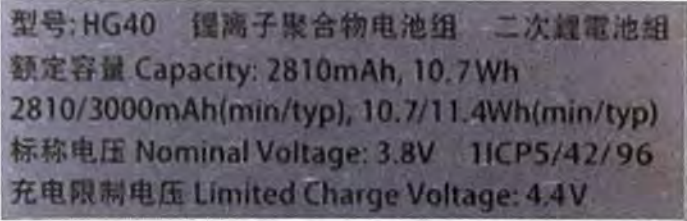
东莞新能源科技有限公司测试中心
Dongguan Amperex Technology Limited Test Center



样品名称 Sample name	锂离子电池 Li-ion battery	测试类别 Test category	委托检测 After testing
样品型号 Sample model	HG40	样品接收日期 Accepted date	2016-07-26
样品规格 Sample specification	3.8V 10.7Wh	测试开始日期 Test start date	2016-07-28
样品数量(个) Sample quantity(pcs)	43	测试结束日期 Test end date	2016-08-19
委托单位 Consignor	东莞新能源科技有限公司 Dongguan Amperex Technology Limited		
委托单位地址 Consignor address	中国广东省东莞市松山湖科技园工业西路 1 号 West Industrial Road 1#, Songshan Lake Industry Park, Dongguan City, Guangdong Province, P. R. China		
制造商 Manufacturer	宁德新能源科技有限公司 Ningde Amperex Technology Limited		
制造商地址 Manufacturer address	中国福建省宁德市蕉城区漳湾镇新港路 1 号 No.1 XinGang Road, Zhangwan Town, JiaoCheng City, Ningde, Fujian Province, P.R. China		
测试环境条件 Test environment condition	环境温度: 15℃ - 25℃; 环境湿度: 45%~75% Ambient temperature: 15℃ - 25℃; Ambient humidity: 45%~75%		
样品外观 Appearance	银色尼龙/铝/聚丙烯复合膜 Silver nylon/Al/PP compound film		
测试方法和判定标准 Test method and criterion	联合国《关于危险货物运输的建议书 试验和标准手册》 ST/SG/AC.10/11 Rev5, amend 2, 38.3 UNITED NATIONS "Recommendations on the TRANSPORT OF DANGEROUS GOODS" Manual of Tests and Criteria ST/SG/AC.10/11 Rev5, amend 2, 38.3		
测试项目 Test items	高度模拟、温度试验、振动、冲击、外部短路、挤压、过度充电、强制放电 Altitude simulation, Thermal test, Vibration, Shock, External short circuit, Crush, Overcharge, Forced discharge		
测试结论 Conclusion	经测试, 该样品符合联合国《关于危险货物运输的建议书 试验和标准手册》 ST/SG/AC.10/11 Rev5, amend 2, 38.3 标准的要求 The sample has passed the test items of UNITED NATIONS "Recommendations on the TRANSPORT OF DANGEROUS GOODS" Manual of Tests and Criteria ST/SG/AC.10/11 Rev5, amend 2, 38.3		
测试人员 Testers	钟少芳 2016.8.23 王绪成 2016.8.23 黎华彪 2016.8.23		
编制人员 Compiler	陈雅 2016.8.23		
审核 Checker	吕乃珍 2016.8.23		
批准 Approval	郭佳丽 2016.8.23/16. 蔡京晶: 技术负责人 Cai JingJing: Technical Director 郭佳丽: 中心主任 Guo Jiali: Center Director		

东莞新能源科技有限公司
测试中心
Dongguan Amperex
Technology Limited Test Center
(签章)
(signature)

样品描述及说明 Sample description and description			
样品名称 Sample name	锂离子电池	型号 Model	HG40
额定容量 Rated capacity	2810mAh	标称电压 Nominal voltage	3.8V
电池化学组分 Battery chemical composition	钴酸锂-石墨		
测试用充电程序 Test charge program	按照制造商规定的办法进行充电 (3A CC to 4.1V, CV to 2A, 2A CC to 4.4V, CV to 0.05C)		
测试用放电程序 Test using a program	按照制造商规定的电流进行恒流放电至放电截止电压 (1C DC to 3.0V)		

测试样品图 Test sample image	
	
图 1: 正面 Figure 1: positive	图 2: 反面 Figure 2: negative
	
图 3: 标识 Figure 3: Logo	

序号 No.	测试项目名称 Name of test	标准要求或标准条款号 Standard requirement or the clause number of standard	测试结果 Test result	本项结论 Test conclusion	备注 Remark	
1	高度模拟 Altitude simulation	联合国《关于危险货物运输的建议书 试验和标准手册》试验 T1; UN Manual of Test and Criteria ST/SG/AC.10/11/Rev.5, amend 2, 38.3 Test 1	见附表 1 See Appendix 1	合格 Passed	/	
2	温度试验 Thermal	联合国《关于危险货物运输的建议书 试验和标准手册》试验 T2; UN Manual of Test and Criteria ST/SG/AC.10/11/Rev.5, amend 2, 38.3 Test 2	见附表 2 See Appendix 2	合格 Passed	/	
3	振动 Vibration	联合国《关于危险货物运输的建议书 试验和标准手册》试验 T3; UN Manual of Test and Criteria ST/SG/AC.10/11/Rev.5, amend 2, 38.3 Test 3	见附表 3 See Appendix 3	合格 Passed	/	
4	冲击 Shock	联合国《关于危险货物运输的建议书 试验和标准手册》试验 T4; UN Manual of Test and Criteria ST/SG/AC.10/11/Rev.5, amend 2, 38.3 Test 4	见附表 4 See Appendix 4	合格 Passed	/	
5	外部短路 External short-circuit	联合国《关于危险货物运输的建议书 试验和标准手册》试验 T5; UN Manual of Test and Criteria ST/SG/AC.10/11/Rev.5, amend 2, 38.3 Test 5	见附表 5 See Appendix 5	合格 Passed	/	
6	挤压/撞击 Crush/Impact	联合国《关于危险货物运输的建议书 试验和标准手册》试验 T6; UN Manual of Test and Criteria ST/SG/AC.10/11/Rev.5, amend 2, 38.3 Test 6	见附表 6 See Appendix 6	合格 Passed	/	
7	过度充电 Overcharge	联合国《关于危险货物运输的建议书 试验和标准手册》试验 T7; UN Manual of Test and Criteria ST/SG/AC.10/11/Rev.5, amend 2, 38.3 Test 7	见附表 7 See Appendix 7	合格 Passed	/	
8	强制放电 Forced discharge	联合国《关于危险货物运输的建议书 试验和标准手册》试验 T8; UN Manual of Test and Criteria ST/SG/AC.10/11/Rev.5, amend 2, 38.3 Test 8	见附表 8 See Appendix 8	合格 Passed	/	
分包测试情况 Subcontracted test condition		测试项目 Test items	/			
		分包实验室 Subcontracted Laboratory	名称 Name	/	邮编 Post code	/
			地址 Address	/	电话 Tel.	/

序号 No.	1	测试项目名称 Name of test items	高度模拟 Altitude simulation					
样品编号 Sample No.	样品状态 Sample status	测试前 Before test		测试后 After test		质量损失 Mass loss (%)	剩余电压 Residual OCV (%)	测试结果 Test result
		电池质量 m_1 (g)	开路电压 U_1 (V)	电池质量 m_2 (g)	开路电压 U_2 (V)			
8S%SNN5982A%A0 11056143ATL1675--- -----1AA005J	首次完全充电 1cyc fully charged	40.9223	4.368	40.9212	4.360	0.00%	99.82%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA0011	首次完全充电 1cyc fully charged	40.7909	4.368	40.7897	4.359	0.00%	99.79%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA002B	首次完全充电 1cyc fully charged	41.0107	4.367	41.0095	4.357	0.00%	99.77%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA006F	首次完全充电 1cyc fully charged	40.8784	4.369	40.8774	4.361	0.00%	99.82%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA008X	首次完全充电 1cyc fully charged	40.9938	4.368	40.9923	4.359	0.00%	99.79%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA002K	首次完全充电 1cyc fully charged	40.8495	4.366	40.8481	4.358	0.00%	99.82%	O
8S%SNN5982A%A0 11056143ATL166D--- -----1AA0063	首次完全充电 1cyc fully charged	40.8859	4.369	40.8835	4.359	0.01%	99.77%	O
8S%SNN5982A%A0 11056143ATL166D--- -----1AA0115	首次完全充电 1cyc fully charged	40.9828	4.369	40.9803	4.361	0.01%	99.82%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA003D	首次完全充电 1cyc fully charged	40.8907	4.369	40.8880	4.360	0.01%	99.79%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA006D	首次完全充电 1cyc fully charged	40.8480	4.368	40.8453	4.360	0.01%	99.82%	O
以下空白								

注: L-泄漏; V-排气; D-解体; R-破裂; F-起火; O-无泄漏, 无排气, 无解体, 无破裂, 无起火。
Note: L-Leakage, V-Venting, D-Disassembly, R-Rupture, F-Fire, O- No leakage, no venting, no disassembly, no rupture & no fire.

序号 No.	2	测试项目名称 Name of test items		温度试验 Thermal test				
样品编号 Sample No.	样品状态 Sample status	测试前 Before test		测试后 After test		质量损失 Mass loss (%)	剩余电压 Residual OCV (%)	测试结果 Test result
		电池质量 m_1 (g)	开路电压 U_1 (V)	电池质量 m_2 (g)	开路电压 U_2 (V)			
8S%SNN5982A%A0 11056143ATL1675--- -----1AA005J	首次完全充电 1cyc fully charged	40.9212	4.360	40.9175	4.272	0.01%	97.98%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA0011	首次完全充电 1cyc fully charged	40.7897	4.359	40.7852	4.270	0.01%	97.96%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA002B	首次完全充电 1cyc fully charged	41.0095	4.357	41.0073	4.252	0.01%	97.59%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA006F	首次完全充电 1cyc fully charged	40.8774	4.361	40.8750	4.273	0.01%	97.98%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA008X	首次完全充电 1cyc fully charged	40.9923	4.359	40.9895	4.270	0.01%	97.96%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA002K	首次完全充电 1cyc fully charged	40.8481	4.358	40.8462	4.269	0.00%	97.96%	O
8S%SNN5982A%A0 11056143ATL166D--- -----1AA0063	首次完全充电 1cyc fully charged	40.8835	4.359	40.8834	4.268	0.00%	97.91%	O
8S%SNN5982A%A0 11056143ATL166D--- -----1AA0115	首次完全充电 1cyc fully charged	40.9803	4.361	40.9798	4.276	0.00%	98.05%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA003D	首次完全充电 1cyc fully charged	40.8880	4.360	40.8868	4.269	0.00%	97.91%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA006D	首次完全充电 1cyc fully charged	40.8453	4.360	40.8426	4.272	0.01%	97.98%	O
以下空白								

注: L-泄漏; V-排气; D-解体; R-破裂; F-起火; O-无泄漏, 无排气, 无解体, 无破裂, 无起火。
 Note: L-Leakage, V-Venting, D-Disassembly, R-Rupture, F-Fire, O- No leakage, no venting, no disassembly, no rupture & no fire.

序号 No.	3	测试项目名称 Name of test items		振动 Vibration				
样品编号 Sample No.	样品状态 Sample status	测试前 Before test		测试后 After test		质量损失 Mass loss (%)	剩余电压 Residual OCV (%)	测试结果 Test result
		电池质量 m_1 (g)	开路电压 U_1 (V)	电池质量 m_2 (g)	开路电压 U_2 (V)			
8S%SNN5982A%A0 11056143ATL1675--- -----IAA005J	首次完全充电 1cyc fully charged	40.9175	4.272	40.9165	4.269	0.00%	99.93%	O
8S%SNN5982A%A0 11056143ATL1675--- -----IAA001I	首次完全充电 1cyc fully charged	40.7852	4.270	40.7845	4.267	0.00%	99.93%	O
8S%SNN5982A%A0 11056143ATL1675--- -----IAA002B	首次完全充电 1cyc fully charged	41.0073	4.252	41.0047	4.239	0.01%	99.69%	O
8S%SNN5982A%A0 11056143ATL1675--- -----IAA006F	首次完全充电 1cyc fully charged	40.8750	4.273	40.8726	4.269	0.01%	99.91%	O
8S%SNN5982A%A0 11056143ATL1675--- -----IAA008X	首次完全充电 1cyc fully charged	40.9895	4.270	40.9875	4.266	0.00%	99.91%	O
8S%SNN5982A%A0 11056143ATL1675--- -----IAA002K	首次完全充电 1cyc fully charged	40.8462	4.269	40.8437	4.265	0.01%	99.91%	O
8S%SNN5982A%A0 11056143ATL166D--- -----IAA0063	首次完全充电 1cyc fully charged	40.8834	4.268	40.8816	4.265	0.00%	99.93%	O
8S%SNN5982A%A0 11056143ATL166D--- -----IAA0115	首次完全充电 1cyc fully charged	40.9798	4.276	40.9778	4.272	0.00%	99.91%	O
8S%SNN5982A%A0 11056143ATL1675--- -----IAA003D	首次完全充电 1cyc fully charged	40.8868	4.269	40.8853	4.265	0.00%	99.91%	O
8S%SNN5982A%A0 11056143ATL1675--- -----IAA006D	首次完全充电 1cyc fully charged	40.8426	4.272	40.8411	4.269	0.00%	99.93%	O
以下空白								

注: L-泄漏; V-排气; D-解体; R-破裂; F-起火; O-无泄漏, 无排气, 无解体, 无破裂, 无起火。
Note: L-Leakage, V-Venting, D-Disassembly, R-Rupture, F-Fire, O- No leakage, no venting, no disassembly, no rupture & no fire.

序号 No.	4	测试项目名称 Name of test items		冲击 Shock				
样品编号 Sample No.	样品状态 Sample status	测试前 Before test		测试后 After test		质量损失 Mass loss (%)	剩余电压 Residual OCV (%)	测试结果 Test result
		电池质量 m_1 (g)	开路电压 U_1 (V)	电池质量 m_2 (g)	开路电压 U_2 (V)			
8S%SNN5982A%A0 11056143ATL1675--- -----1AA005J	首次完全充电 1cyc fully charged	40.9165	4.269	40.9155	4.268	0.00%	99.98%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA0011	首次完全充电 1cyc fully charged	40.7845	4.267	40.7838	4.266	0.00%	99.98%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA002B	首次完全充电 1cyc fully charged	41.0047	4.239	41.0041	4.237	0.00%	99.95%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA006F	首次完全充电 1cyc fully charged	40.8726	4.269	40.8712	4.267	0.00%	99.95%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA008X	首次完全充电 1cyc fully charged	40.9875	4.266	40.9855	4.264	0.00%	99.95%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA002K	首次完全充电 1cyc fully charged	40.8437	4.265	40.8422	4.263	0.00%	99.95%	O
8S%SNN5982A%A0 11056143ATL166D--- -----1AA0063	首次完全充电 1cyc fully charged	40.8816	4.265	40.8798	4.265	0.00%	100.00%	O
8S%SNN5982A%A0 11056143ATL166D--- -----1AA0115	首次完全充电 1cyc fully charged	40.9778	4.272	40.9758	4.270	0.00%	99.95%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA003D	首次完全充电 1cyc fully charged	40.8853	4.265	40.8838	4.264	0.00%	99.98%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA006D	首次完全充电 1cyc fully charged	40.8411	4.269	40.8396	4.269	0.00%	100.00%	O
以下空白								

注: L-泄漏; V-排气; D-解体; R-破裂; F-起火; O-无泄漏, 无排气, 无解体, 无破裂, 无起火。

Note: L-Leakage, V-Venting, D-Disassembly, R-Rupture, F-Fire, O- No leakage, no venting, no disassembly, no rupture & no fire.

序号 No.	5	测试项目名称 Name of test items	外部短路 External short circuit		
样品编号 Sample No.	样品状态 Sample status	样品表面最高温度 Max. External Temperature (°C)	测试结果 Test result	备注 Remark	
8S%SNN5982A%A0 11056143ATL1675--- -----1AA005J	首次完全充电 1cyc fully charged	57.1	O	/	
8S%SNN5982A%A0 11056143ATL1675--- -----1AA0011	首次完全充电 1cyc fully charged	57.1	O	/	
8S%SNN5982A%A0 11056143ATL1675--- -----1AA002B	首次完全充电 1cyc fully charged	56.5	O	/	
8S%SNN5982A%A0 11056143ATL1675--- -----1AA006F	首次完全充电 1cyc fully charged	56.3	O	/	
8S%SNN5982A%A0 11056143ATL1675--- -----1AA008X	首次完全充电 1cyc fully charged	55.9	O	/	
8S%SNN5982A%A0 11056143ATL1675--- -----1AA002K	首次完全充电 1cyc fully charged	56.9	O	/	
8S%SNN5982A%A0 11056143ATL166D--- -----1AA0063	首次完全充电 1cyc fully charged	56.7	O	/	
8S%SNN5982A%A0 11056143ATL166D--- -----1AA0115	首次完全充电 1cyc fully charged	56.5	O	/	
8S%SNN5982A%A0 11056143ATL1675--- -----1AA003D	首次完全充电 1cyc fully charged	56.3	O	/	
8S%SNN5982A%A0 11056143ATL1675--- -----1AA006D	首次完全充电 1cyc fully charged	55.8	O	/	
以下空白					
注: D-解体; R-破裂; F-起火; O-无解体, 无破裂, 无起火。 Note: D-Disassembly, R-Rupture, F-Fire, O- No disassembly, no rupture & no fire.					

[illegible]

序号 No.	8	测试项目名称 Name of test items	强制放电 Forced discharge
样品编号 Sample No.	样品状态 Sample status	测试结果 Test result	备注 Remark
021653911456	首次完全放电 1cyc fully discharged	O	/
021653921498	首次完全放电 1cyc fully discharged	O	/
021653911472	首次完全放电 1cyc fully discharged	O	/
021653911428	首次完全放电 1cyc fully discharged	O	/
021653911411	首次完全放电 1cyc fully discharged	O	/
021653911554	首次完全放电 1cyc fully discharged	O	/
021653911327	首次完全放电 1cyc fully discharged	O	/
021653911382	首次完全放电 1cyc fully discharged	O	/
021653931029	首次完全放电 1cyc fully discharged	O	/
021653941446	首次完全放电 1cyc fully discharged	O	/
021653911192	50 次完全放电 50yc fully discharged	O	/
021653921040	50 次完全放电 50yc fully discharged	O	/
021653921462	50 次完全放电 50yc fully discharged	O	/
021653911188	50 次完全放电 50yc fully discharged	O	/
021653911268	50 次完全放电 50yc fully discharged	O	/
021653911944	50 次完全放电 50yc fully discharged	O	/
021653921612	50 次完全放电 50yc fully discharged	O	/
021653911542	50 次完全放电 50yc fully discharged	O	/
021653941595	50 次完全放电 50yc fully discharged	O	/
021653941305	50 次完全放电 50yc fully discharged	O	/
注: D-解体; F-起火; O-无解体, 无起火。 Note: D-Disassembly, F-Fire, O- No disassembly, no fire.			

声 明

Statement

1. 检测报告无本实验室公章无效。

The test report is invalid if not affixed the official seal of the laboratory to it.

2. 检测报告涂改无效。

The test report is invalid if it is blotted out.

3. 送样委托检测结果，仅对所送样品有效。

The conclusion of the consignment test is only valid for the provided sample.

4. 本报告未经本实验室书面许可，不可部分复制。

This report cannot be partial copied, without the written permission of Amperex Technology Limited Test Center.

东莞新能源科技有限公司测试中心

Dong guan Amperex Technology Limited Test Center

地址：中国广东省东莞市松山湖科技园工业西路 1 号

Addr.: West Industrial Road 1#, Songshan Lake Industry Park, Dongguan City,
Guangdong Province, P. R. China

电话 Tel. : +86-0769-88989149

传真 Fax.: +86-0769-88989483

网址 Website : www.atlbattery.com



中国认可
国际互认
检测
TESTING
CNAS L0095

Page 1 of 12 Pages

No. :RZUN2016-2476

检测报告

TEST REPORT

UN38.3

NAME OF SAMPLE: 3,8V RECHARGEABLE LITHIUM POLYMER BATTERY
产品名称: 锂离子聚合物电池组

CLIENT: Sunwoda Electronic Co., Ltd.
委托单位: 欣旺达电子股份有限公司

CLASSIFICATION OF TEST: Commission Test
检测类别: 委托测试

威凯检测技术有限公司
Vkan Certification & Testing Co., Ltd.

检验检测专用章

检测报告

TEST REPORT

No.: RZUN2016-2476

Page 2 of 12 Pages

Name of samples: 3,8V RECHARGEABLE LITHIUM POLYMER BATTERY 样品名称: 锂离子聚合物电池组	Type/Model: 型号规格: HG40 3,8V 2810/3000mAh(min/typ) 10,7/11,4Wh(min/typ)
Appearance: Silvery 样品外观颜色: 银色	Trade mark: 商标: -
Commissioned by: Sunwoda Electronic Co., Ltd. 委托单位: 欣旺达电子股份有限公司	Manufacturer: Sunwoda Electronic Co., Ltd., Branch 3 生产单位: 欣旺达电子股份有限公司第三分公司
Commissioner address: 1/F, 2/F of Area A&B&D, 3-9F, Administration Building, No.2, Yihe Rd., Shilong Community, Shiyan Street, Bao'an District, Shenzhen City, P. R. China 518108 委托单位地址: 深圳市宝安区石岩街道石龙社区颐和路 2 号综合楼 2 楼 B 区	Manufacturer address: Blk. A B C D E, 2 Yihe Rd., Shilong Community, Shiyan Street, Bao'an District, Shenzhen Guangdong 518108, P. R. China 生产单位地址: 深圳市宝安区石岩街道石龙社区颐和路 2 号厂房 A、B、C、D、E 栋
Classification of test: Commission Test 检测类别: 委托测试	Quantity of sample: 43 cells 样品数量: 43 个电芯
Tested according to: 测试标准: ST/SG/AC.10/11/Rev.5/Amend.2/Section 38.3	Sample identification: 样品标识序号: c1#~c43#
Receiving date: 接样日期: 2016-09-06	Means of receiving: Submitted by commissioner 接样方式: 委托单位送样
Completing date: 完成日期: 2016-09-29	Test item: 8 items 测试项目: 8 项
Test conclusion: 检测结论: The 3,8V RECHARGEABLE LITHIUM POLYMER BATTERY submitted by Sunwoda Electronic Co., Ltd. are tested according to Section 38.3 of the Fifth Revised Edition Amendment 2 of the Recommendations on the Transport of Dangerous Goods, Manual of Test and Criteria (ST/SG/AC.10/11/Rev.5 Amend.2/Section 38.3). The test items are full items. The test results comply with the relevant requirements of the standard. 由欣旺达电子股份有限公司送检的锂离子聚合物电池组, 依据《关于危险品货物运输的建议书》试验和标准手册第五修订版修正 2 第 38.3 节进行检测, 试验为全项目, 测试结果符合标准相关要求。  Seal of CVC CVC 印章 Date of issue 签发日期: 2016.9.29	

Approved by:

批准:

Lin Guang

Reviewed by:

审核:

Zhang Sigao

Tested by:

检测:

Wei Guohua

Description and illustration of the sample:

样品说明及描述:

The sample's status is good

样品状况良好。

Test item 测试项目	Sample No. 样品编号	State 状态	Remark 备注
T.1~T.5	c1#~c10#	at first cycle, in fully charged state 第一个交替充电放电周期完全充电状态	-
T.6	c11# c15#	at first cycle at 50% of the design rated capacity 第一个交替充电放电周期充电到设计额定容量的 50%	-
T.7	c16#~c19#	at first cycle, in fully charged state 第一个交替充电放电周期完全充电状态	-
	c20#~c23#	after fifty cycles ending in fully charged state 第五十个交替充电放电周期完全充电状态	-
T.8	c24#~c33#	at first cycle, in fully discharged state 第一个交替充电放电周期完全放电状态	-
	c34#~c43#	after fifty cycles ending in fully discharged state 第五十个交替充电放电周期完全放电状态	-

Description of the sampling procedure:

取样程序的说明:

/

Description of the deviation from the standard, if any:

测试结果不符合标准项的说明:

/

Remarks:

备注:

Throughout this report a comma is used as the decimal separator.

本报告中以逗号代替小数点。

The 3.8V RECHARGEABLE LITHIUM POLYMER BATTERY submitted by Sunwoda Electronic Co., Ltd. are single cell batteries. According to the standard, a single cell battery is considered a "cell" and shall be tested according to the testing requirements for "cell".

欣旺达电子股份有限公司所送的锂离子聚合物电池组是单电芯电池。根据标准要求，单电芯电池被视为“电芯”，须根据“电芯”的实验要求进行试验。

Photos of Samples and Labels/样品照片及标识

Single Cell Battery /单电芯电池

(HG40 3,8V 2810/3000mAh(min/typ) 10,7/11,4Wh(min/typ))



ST/SG/AC.10/11/Rev.5/Amend.2/Section 38.3			
Clause 章节	Requirements 标准要求	Result 测试结果	Verdict 判定
38.3.4	Procedure/测试步骤		—
38.3.4.1	Test 1: Altitude simulation/测试 1: 高度模拟 Test cells and batteries shall be stored at a pressure of 11,6kPa or less for at least six hour at ambient temperature (20±5℃)/ 将电芯和电池在温度为 20±5℃, 大气压力为不大于 11,6kpa 的环境中贮存不少于 6 个小时		P
	Requirement/标准要求: 1 Cells and batteries Mass loss limit: ≤ 0,2% /样品质量损失 ≤ 0,2% 2 Open circuit voltage not less than 90%, The requirement relating to voltage is not applicable to test cells and batteries at full discharged states. 样品试验后开路电压应不低于试验前开路电压的 90%, 此要求不适用于完全放完电的电池和电芯。 3 No leakage, no venting, no disassembly, no rupture and no fire 样品 (电池) 应无漏液、无排气、无解体、无破裂以及无着火现象的发生	The samples c1#~c10# : No leakage, no venting, no disassembly, no rupture and no fire/ 编号为 c1#~c10# 的样品: 无漏液、无排气、无解体、无破裂以及无着火现象 The data see table1/数据见表 1	
38.3.4.2	Test 2: Thermal test/测试 2: 热冲击 Test cells and batteries are to be stored for/电池存储条件如下: 1 one temperature cycle: 72±2℃(6h) —40±2℃(6h) /一次温度循环为 72±2℃(6h) —40±2℃(6h) 2 The maximum time interval between test temperature extremes is 30 minutes/温度转换最大间隔时间为 30min 3 This procedure is to be repeated 10 times/重复 10 次循环 4 after which all test cells and batteries are to be stored for 24 hours at ambient temperature (20±5℃)/循环结束后, 电池在 20±5℃的条件下搁置 24 小时.		P
	Requirements/标准要求 1 Cells and batteries Mass loss limit: ≤ 0,2% /样品质量损失 ≤ 0,2% 2 Open circuit voltage not less than 90%, The requirement relating to voltage is not applicable to test cells and batteries at full discharged states. 样品试验后开路电压应不低于试验前开路电压的 90%, 此要求不适用于完全放完电的电池和电芯。 3 No leakage, no venting, no disassembly, no rupture and no fire 样品 (电池) 应无漏液、无排气、无解体、无破裂以及无着火现象的发生	The samples c1#~c10# : No leakage, no venting, no disassembly, no rupture and no fire/ 编号为 c1#~c10# 的样品: 无漏液、无排气、无解体、无破裂以及无着火现象 The data see table1/数据见表 1	

ST/SG/AC.10/11/Rev.5/Amend.2/Section 38.3			
Clause 章节	Requirements 标准要求	Result 测试结果	Verdict 判定
38.3.4.3	Test 3: Vibration/测试 3: 振动 1 Cells and batteries are firmly secured to the platform of the vibration machine /电芯和电池牢固地安装在振动台（的台面）上 2 The vibration :a sinusoidal waveform with a logarithmic sweep between 7 Hz and 200 Hz and back to 7 Hz traversed in 15 minutes/振动以正弦波形式，以 7Hz 增加至 200Hz，然后在减少回到 7Hz 为一个循环，一个循环持续 15 分钟的对数前移传送。 3 the logarithmic frequency sweep is as follows: from 7 Hz a peak acceleration of 1 gn is maintained until 18 Hz is reached, The amplitude is then maintained at 0,8 mm (1,6 mm total excursion) and the frequency increased until a peak acceleration of 8 gn occurs (approximately 50Hz), A peak acceleration of 8 gn is then maintained until the frequency is increased to 200 Hz/对数扫频为:从 7 赫兹开始保持 1gn 的最大加速度直到频率为 18 赫兹，然后将振幅保持在 0,8 毫米（总偏移 1,6 毫米）并增加频率直到最大加速度达到 8gn（频率约为 50 赫兹），将最大加速度保持在 8gn 直到频率增加到 200 赫兹。 4This cycle repeated 12 times for a total of 3 hours for each of three mutually perpendicular mounting position of the cell /以振动的其中一个方向必须是垂直样品极性，对每个电芯从三个互相垂直的方向上循环 12 次，每个方向 3 个小时，共 9 小时。		P
	Requirements/标准要求 1 Cells and batteries Mass loss limit:≤ 0,2% /样品质量损失 ≤0,2% 2 Open circuit voltage not less than 90%, The requirement relating to voltage is not applicable to test cells and batteries at full discharged states. 样品试验后开路电压应不低于试验前开路电压的 90%，此要求不适用于完全放完电的电池和电芯。 3 No leakage, no venting, no disassembly, no rupture and no fire 样品（电池）应无漏液、无排气、无解体、无破裂以及无着火现象的发生	The samples c1#~c10# : No leakage, no venting, no disassembly, no rupture and no fire/ 编号为 c1#~c10# 的样品：无漏液、无排气、无解体、无破裂以及无着火现象 The data see table1/数据见表 1	

ST/SG/AC.10/11/Rev.5/Amend.2/Section 38.3			
Clause 章节	Requirements 标准要求	Result 测试结果	Verdict 判定
38.3.4.4	Test 4: Shock/测试 4: 冲击 1 Test cells and batteries shall be secured to the testing machine/以稳固的托架固定住每个电芯和电池样品的全部配件表面。 2 shock: a half-sine shock of peak acceleration of 150 gn and pulse duration of 6 milliseconds, large cells and large batteries shall be subjected to a half-sine or peak acceleration of 50 gn and pulse duration of 11 milliseconds/对每个电芯或电池以峰值为 150gn 的半正弦的加速度撞击，脉冲持续 6 毫秒，大型电池和大型电池组须经受最大加速度 50gn 和脉冲持续时间 11 毫秒的半正弦波冲击。 3 Each cell or battery shall be subjected to three shocks in the positive direction followed by three shocks in the negative direction of three mutually perpendicular mounting positions of the cell or battery for a total of 18 shocks/每个电池或电池组须在三个互相垂直的电池安装方位的正方向经受三次冲击，接着在反方向经受三次冲击，总共经受 18 次冲击。		P
	Requirements/标准要求: 1 Cells and batteries Mass loss limit: $\leq 0,2\%$ /样品质量损失 $\leq 0,2\%$ 2 Open circuit voltage not less than 90%, The requirement relating to voltage is not applicable to test cells and batteries at full discharged states. 样品试验后开路电压应不低于试验前开路电压的 90%，此要求不适用于完全放完电的电池和电芯。 3 No leakage, no venting, no disassembly, no rupture and no fire 样品（电池）应无漏液、无排气、无解体、无破裂以及无着火现象的发生	The samples c1#~c10# : No leakage, no venting, no disassembly, no rupture and no fire/ 编号为 c1#~c10# 的样品：无漏液、无排气、无解体、无破裂以及无着火现象 The data see table1/数据见表 1	
38.3.4.5	Test 5: External Short Circuit/测试 5 :外部短路 1 The cell or battery to be tested shall be temperature stabilized so that its external case temperature reaches $55\pm 2^{\circ}\text{C}$ /保持试验环境温度稳定在 $55\pm 2^{\circ}\text{C}$ ，以使电芯或电池样品外表温度达到 $55\pm 2^{\circ}\text{C}$ 2 the cell or battery shall be subjected to a short circuit condition with a total external resistance of less than 0,1 ohm at $55\pm 2^{\circ}\text{C}$, This short circuit condition is continued for at least one hour after the cell or battery external case temperature has returned to $55\pm 2^{\circ}\text{C}$ /将样品正负极用小于 0,1 Ω 的总电阻回路进行短路，样品的外表温度恢复到 $55\pm 2^{\circ}\text{C}$ 之后保持短路状态 1 小时以上。 3 the cell or battery must be observed for a further six hour for the test to be concluded, /对电芯或电池必须进一步观察 6 个小时才能下结论。		P
	Requirements/标准要求: During the test and within six hours after test ,the cells or batteries 在测试过程中以及之后 6 个小时内，电芯或电池样品 1. External temperature not exceed 170°C 外表温度不超过 170°C 2. No disassembly, no rupture and no fire. 无解体、无破裂和无着火现象发生。	The samples c1#~c10# : no disassembly, no rupture and no fire/ 编号为 c1#~c10# 的样品：无解体、无破裂以及无着火现象 The data see table1/数据见表 1	

ST/SG/AC.10/11/Rev.5/Amend.2/Section 38.3			
Clause 章节	Requirements 标准要求	Result 测试结果	Verdict 判定
38.3.4.6	Test 6: Impact / Crush / 测试 6: 撞击/挤压		P
	Impact (applicable to cylindrical cells not less than 18mm in diameter) / 撞击（适用于直径不小于 18 毫米的圆柱形电池）		N/A
	1 This test sample cell or component cell is to be placed on a flat smooth surface/ 将试验样品用的电芯或聚合物电芯放在一个平坦光滑的平面上 2 A 15,8 mm diameter bar is to be placed across the center of the sample, A 9,1kg mass is to be dropped from a height of 61±2,5cm onto the sample./将一直径为 15,8mm 的横木横过电池中部放置后，将一质量为 9,1kg 的物体从 61±2,5cm 的高度落向样品。 3 The test sample is to be impacted with its longitudinal axis parallel to the flat surface and perpendicular to the longitudinal axis of the 15,8 mm ± 0,1mm diameter curved surface lying across the centre of the test sample. Each sample is to be subjected to only a single impact./ 接受撞击的试样，纵轴应与平坦的表面平行并与横放在试样中心的直径 15,8±0,1 毫米弯曲表面的纵轴垂直。每一个试样只经受一次撞击。		
	Requirements/标准要求: 1 Cells external temperature not exceed 170°C.电芯或电池的最高表面温度应不超过 170°C 2 No disassembly, no rupture and no fire within six hours of this test 试验结束后 6 个小时之内，电芯和聚合物电芯应无解体和无着火现象发生	—	
	Crush (applicable to prismatic, pouch, coin/button cells and cylindrical cells less than 18mm in diameter) 挤压（适用于棱柱形、袋装、硬币/纽扣电池和直径小于 18 毫米的圆柱形电池）		P
	1 A cell or component cell is to be crushed between two flat surfaces. The crushing is to be gradual with a speed of approximately 1,5 cm/s at the first point of contact. The crushing is to be continued until the first of the three options below is reached. / 将电池或元件电池放在两个平面之间挤压，挤压力度逐渐加大，在第一个接触点上的速度大约为 1,5 厘米/秒。挤压持续进行，直到出现以下三种情况之一： (a) The applied force reaches 13 kN ± 0,78 kN. / 施加的力达到 13 千牛±0,78 千牛 (b) The voltage of the cell drops by at least 100 mV,/电池的电压下降至少 100 毫伏 (c) The cell is deformed by 50% or more of its original thickness./电池变形达原始厚度的 50%以上。 2. A prismatic or pouch cell shall be crushed by applying the force to the widest side. A button/coin cell shall be crushed by applying the force on its flat surfaces. / 棱柱形或袋装电池应从最宽的一面施压。纽扣/硬币形电池应从其平坦表面施压。圆柱形应从与纵轴垂直的方向施压。		
	Requirements/标准要求: 1 Cells external temperature not exceed 170°C.电芯或电池的最高表面温度应不超过 170°C 2 No disassembly, no rupture and no fire within six hours of this test 试验结束后 6 个小时之内，电芯和聚合物电芯应无解体和无着火现象发生	The samples c11#~c15#: no disassembly, no rupture and no fire/ 编号为 c11#~c15#的样品：无解体、无着火现象 The data see table2/数据见表 2	

ST/SG/AC.10/11/Rev.5/Amend.2/Section 38.3

Clause 章节	Requirements 标准要求	Result 测试结果	Verdict 判定
38.3.4.7	Test 7: Overcharge/测试 7: 过充电		P
	1 The charge current shall be twice the manufacturer's recommended maximum continuous charge current/以 2 倍制造厂推荐的最大持续充电电流对样品充电 2 The minimum voltage of the test shall be as follows/本测试最小电压为:		
	a) When the manufacturer's recommended charge voltage is not more than 18V, the minimum voltage of the test shall be the lesser of two times the maximum charge voltage of the battery or 22V/ 如果厂家推荐的充电电压不超过 18V, 本测试的最小充电电压应是厂家标定最大充电电压的两倍或者是 22V 之中的较小者。 b) When the manufacturer's recommended charge voltage is more than 18V, the minimum voltage of the test shall be 1,2 times the maximum charge voltage/ 如果厂家推荐的充电电压超过 18V, 本测试的最小充电电压应是厂家标定最大充电电压的 1,2 倍。 3 Tests are to be conducted at ambient temperature 20±5℃, The duration of the test shall be 24 hours/20±5℃ 的环境温度下, 试验持续 24 小时。	The voltage of the test is 8,8V, and the current is 6,0A 测 试 的 电 压 为 8,8V, 电 流 为 6,0A	
	Requirements/标准要求: No disassembly and no fire within seven days of this test 试验样品在试验中和试验后 7 天内, 应无解体和无着火现象发生。	The samples c16#~c23# : For voltage data before test, see table 3. / 试验前电压见表 3 no disassembly, no rupture and no fire/ 编号为 c16#~c23# 的样品: 无解体、无着火现象	
	Test 8: Forced discharge/测试 8: 强制放电		
38.3.4.8	Each cell shall be forced discharged at ambient temperature by connecting it in series with a 12 V D.C. power supply at an initial current equal to the maximum discharge current specified by the manufacturer, 20±5℃ 的环境温度下, 将单个电芯连接在 12V 的直流电源上进行强制放电, 此直流电源提供给每个电芯初始电流为制造厂指定的最大放电电流。		P
	The specified discharge current is to be obtained by connecting a resistive load of the appropriate size and rating in series with the test cell. Each cell shall be forced discharged for a time interval (in hours) equal to its rated capacity divided by the initial test current (in ampere) 指定的放电电流通过串联在测试电芯上的合适大小和功率的负载来获得, 每个电芯的强制放电时间 (小时) 为额定容量除以初始电流 (安培)。		
	Requirements/标准要求: No disassembly and no fire within seven days of this test 试验样品在试验中和试验后 7 天内, 应无解体和无着火现象发生。	c24#~c43# For voltage data before test, see table 4. / 试验前电压见表 4 No disassembly and no fire / 无解体、无着火现象	

Table1: T1~T5 / 表 1: 试验 1~试验 5											
Sample No, 样品号	Mass prior to test / 试验前质量 (g)	OCV prior to test / 试验前电压(V)	Test 1: Altitude simulation/ 测试 1: 高度模拟		Test 2: Thermal test/ 测试 2: 热冲击		Test 3: Vibration/ 测试 3: 振动		Test 4: Shock/ 测试 4: 冲击		Test 5: External Short Circuit/测试 5: 外接短路
			Mass loss(%) 质量损失(%)	Change ratio 电压比(%)	Mass loss(%) 质量损失(%)	Change ratio 电压比(%)	Mass loss(%) 质量损失(%)	Change ratio 电压比(%)	Mass loss(%) 质量损失(%)	Change ratio 电压比(%)	Temp, (°C) 温度 (°C)
c1#	42,371	4,346	0,005	99,95	0,042	98,20	0,002	99,98	0,002	100,00	55,4
c2#	42,466	4,348	0,007	99,95	0,040	98,18	0,002	99,95	0,000	100,00	55,8
c3#	42,842	4,347	0,007	99,98	0,037	98,14	0,002	99,98	0,000	100,00	55,5
c4#	42,402	4,346	0,005	99,98	0,042	98,18	0,005	99,98	0,000	99,98	55,6
c5#	42,635	4,347	0,005	99,98	0,040	98,09	0,002	100,00	0,002	100,00	55,2
c6#	42,438	4,346	0,007	99,98	0,038	98,18	0,002	99,98	0,000	99,98	55,7
c7#	42,580	4,347	0,005	99,98	0,035	98,18	0,005	99,98	0,000	100,00	55,9
c8#	42,821	4,347	0,007	99,98	0,042	98,09	0,005	100,00	0,000	99,98	55,4
c9#	42,376	4,346	0,007	99,98	0,042	98,18	0,002	99,98	0,002	100,00	55,5
c10#	42,482	4,347	0,002	99,98	0,040	98,16	0,005	99,98	0,000	100,00	55,3

Table2: Crush /表 2: 挤压						
Test 6: Crush /测试 6: 挤压	Sample No, 样品号	c11#	c12#	c13#	c14#	c15#
	OCV prior to test / 试验前电压 (V)	3,852	3,854	3,853	3,848	3,846
	Temp, (°C) 温度 (°C)	25,8	25,5	25,4	25,7	25,3

Table3: Overcharge Test of batteries/ 表 3: 电池过充试验									
Test 7: Overcharge /测试 7: 过充电	Sample No, 样品号	c16#	c17#	c18#	c19#	c20#	c21#	c22#	c23#
	OCV prior to test /试 验前电压 (V)	4,346	4,355	4,349	4,348	4,351	4,348	4,346	4,354

Table 4: Forced discharge / 表 4: 强制放电											
Test 8: Forced discharge /测试 8: 强 制放电	Sample No, 样品号	c24#	c25#	c26#	c27#	c28#	c29#	c30#	c31#	c32#	c33#
	OCV prior to test / 试验前电压(V)	3,362	3,369	3,378	3,374	3,366	3,370	3,340	3,363	3,366	3,366
	Sample No, 样品号	c34#	c35#	c36#	c37#	c38#	c39#	c40#	c41#	c42#	c43#
	OCV prior to test / 试验前电压(V)	3,364	3,369	3,369	3,366	3,372	3,375	3,371	3,364	3,367	3,356

注 意 事 项

Important

1. 本报告无检测单位印章、骑封章无效。
The test report is invalid without the official stamp of CVC and Paging seal of CVC.
2. 未经本试验室书面同意，不得部分地复制本报告。
Nobody is allowed to photocopy or partly photocopy this test report without written permission of CVC.
3. 本报告无批准人、审核人及鉴定人签名无效。
The test report is invalid without the signatures of Ratifier, Reviewer and Testing engineer.
4. 本报告涂改无效。
The test report is invalid if altered,
5. 对检测报告若有异议，应于收到报告之日起十五天内向检测单位提出。
Objections to the test report must be submitted to CVC within 15 days,
6. 本报告仅对送检样品负责。
The test report is valid for the tested samples only.
7. 判定栏中“-”表示“不需要判定”，“P”表示“通过”，“F”表示“不通过”，“N/A”表示“不适用”。
As for the Verdict, “-” means “no need for judgement”, “P” means “pass”, “F” means “fail” and “N/A” means “not applicable”.

地 址：中国 广州市科学城开泰大道天泰一路 3 号

Address: No.3,Tiantaiyi Road,Kaitai Avenue,Science City,Guangzhou P. R. China.

电 话(Tel): 020 32293888

传 真(FAX): 020 32293889

邮政编码(Post Code): 510663

E-mail: office@cvc.org.cn

<http://www.cvc.org.cn>



中国认可
国际互认
检测
TESTING
CNAS L3767

检测报告

Test Report

报告编号 (Report No.): RTN-UN-1607-031

样 品 名 称: 锂离子电池
Sample Name: Li-ion battery
样 品 型 号: HG40
Sample Model: HG40
委 托 单 位: 东莞新能源科技有限公司
Consignor: Dongguan Amperex Technology Limited

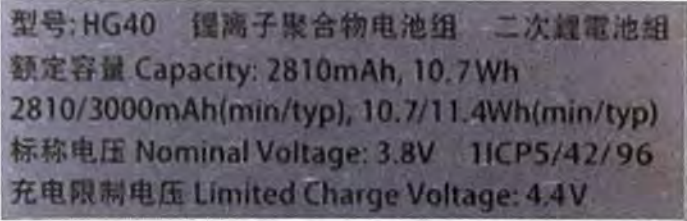
东莞新能源科技有限公司测试中心
Dongguan Amperex Technology Limited Test Center



样品名称 Sample name	锂离子电池 Li-ion battery	测试类别 Test category	委托检测 After testing
样品型号 Sample model	HG40	样品接收日期 Accepted date	2016-07-26
样品规格 Sample specification	3.8V 10.7Wh	测试开始日期 Test start date	2016-07-28
样品数量(个) Sample quantity(pcs)	43	测试结束日期 Test end date	2016-08-19
委托单位 Consignor	东莞新能源科技有限公司 Dongguan Amperex Technology Limited		
委托单位地址 Consignor address	中国广东省东莞市松山湖科技园工业西路 1 号 West Industrial Road 1#, Songshan Lake Industry Park, Dongguan City, Guangdong Province, P. R. China		
制造商 Manufacturer	宁德新能源科技有限公司 Ningde Amperex Technology Limited		
制造商地址 Manufacturer address	中国福建省宁德市蕉城区漳湾镇新港路 1 号 No.1 XinGang Road, Zhangwan Town, JiaoCheng City, Ningde, Fujian Province, P.R. China		
测试环境条件 Test environment condition	环境温度: 15℃ - 25℃; 环境湿度: 45%~75% Ambient temperature: 15℃ - 25℃; Ambient humidity: 45%~75%		
样品外观 Appearance	银色尼龙/铝/聚丙烯复合膜 Silver nylon/Al/PP compound film		
测试方法和判定标准 Test method and criterion	联合国《关于危险货物运输的建议书 试验和标准手册》 ST/SG/AC.10/11 Rev5, amend 2, 38.3 UNITED NATIONS "Recommendations on the TRANSPORT OF DANGEROUS GOODS" Manual of Tests and Criteria ST/SG/AC.10/11 Rev5, amend 2, 38.3		
测试项目 Test items	高度模拟、温度试验、振动、冲击、外部短路、挤压、过度充电、强制放电 Altitude simulation, Thermal test, Vibration, Shock, External short circuit, Crush, Overcharge, Forced discharge		
测试结论 Conclusion	经测试, 该样品符合联合国《关于危险货物运输的建议书 试验和标准手册》 ST/SG/AC.10/11 Rev5, amend 2, 38.3 标准的要求 The sample has passed the test items of UNITED NATIONS "Recommendations on the TRANSPORT OF DANGEROUS GOODS" Manual of Tests and Criteria ST/SG/AC.10/11 Rev5, amend 2, 38.3		
测试人员 Testers	钟少芳 2016.8.23 王绪成 2016.8.23 黎华彪 2016.8.23		
编制人员 Compiler	陈雅 2016.8.23		
审核 Checker	吕乃珍 2016.8.23		
批准 Approval	郭佳丽 2016.8.23/16. 蔡京晶: 技术负责人 Cai JingJing: Technical Director 郭佳丽: 中心主任 Guo Jiali: Center Director		

东莞新能源科技有限公司
测试中心
Dongguan Amperex
Technology Limited Test Center
(签章)
(signature)

样品描述及说明 Sample description and description			
样品名称 Sample name	锂离子电池	型号 Model	HG40
额定容量 Rated capacity	2810mAh	标称电压 Nominal voltage	3.8V
电池化学组分 Battery chemical composition	钴酸锂-石墨		
测试用充电程序 Test charge program	按照制造商规定的办法进行充电 (3A CC to 4.1V, CV to 2A, 2A CC to 4.4V, CV to 0.05C)		
测试用放电程序 Test using a program	按照制造商规定的电流进行恒流放电至放电截止电压 (1C DC to 3.0V)		

测试样品图 Test sample image	
	
图 1: 正面 Figure 1: positive	图 2: 反面 Figure 2: negative
	
图 3: 标识 Figure 3: Logo	

序号 No.	测试项目名称 Name of test	标准要求或标准条款号 Standard requirement or the clause number of standard	测试结果 Test result	本项结论 Test conclusion	备注 Remark	
1	高度模拟 Altitude simulation	联合国《关于危险货物运输的建议书 试验和标准手册》试验 T1; UN Manual of Test and Criteria ST/SG/AC.10/11/Rev.5, amend 2, 38.3 Test 1	见附表 1 See Appendix 1	合格 Passed	/	
2	温度试验 Thermal	联合国《关于危险货物运输的建议书 试验和标准手册》试验 T2; UN Manual of Test and Criteria ST/SG/AC.10/11/Rev.5, amend 2, 38.3 Test 2	见附表 2 See Appendix 2	合格 Passed	/	
3	振动 Vibration	联合国《关于危险货物运输的建议书 试验和标准手册》试验 T3; UN Manual of Test and Criteria ST/SG/AC.10/11/Rev.5, amend 2, 38.3 Test 3	见附表 3 See Appendix 3	合格 Passed	/	
4	冲击 Shock	联合国《关于危险货物运输的建议书 试验和标准手册》试验 T4; UN Manual of Test and Criteria ST/SG/AC.10/11/Rev.5, amend 2, 38.3 Test 4	见附表 4 See Appendix 4	合格 Passed	/	
5	外部短路 External short-circuit	联合国《关于危险货物运输的建议书 试验和标准手册》试验 T5; UN Manual of Test and Criteria ST/SG/AC.10/11/Rev.5, amend 2, 38.3 Test 5	见附表 5 See Appendix 5	合格 Passed	/	
6	挤压/撞击 Crush/Impact	联合国《关于危险货物运输的建议书 试验和标准手册》试验 T6; UN Manual of Test and Criteria ST/SG/AC.10/11/Rev.5, amend 2, 38.3 Test 6	见附表 6 See Appendix 6	合格 Passed	/	
7	过度充电 Overcharge	联合国《关于危险货物运输的建议书 试验和标准手册》试验 T7; UN Manual of Test and Criteria ST/SG/AC.10/11/Rev.5, amend 2, 38.3 Test 7	见附表 7 See Appendix 7	合格 Passed	/	
8	强制放电 Forced discharge	联合国《关于危险货物运输的建议书 试验和标准手册》试验 T8; UN Manual of Test and Criteria ST/SG/AC.10/11/Rev.5, amend 2, 38.3 Test 8	见附表 8 See Appendix 8	合格 Passed	/	
分包测试情况 Subcontracted test condition		测试项目 Test items	/			
		分包实验室 Subcontracted Laboratory	名称 Name	/	邮编 Post code	/
			地址 Address	/	电话 Tel.	/

序号 No.	1	测试项目名称 Name of test items	高度模拟 Altitude simulation					
样品编号 Sample No.	样品状态 Sample status	测试前 Before test		测试后 After test		质量损失 Mass loss (%)	剩余电压 Residual OCV (%)	测试结果 Test result
		电池质量 m_1 (g)	开路电压 U_1 (V)	电池质量 m_2 (g)	开路电压 U_2 (V)			
8S%SNN5982A%A0 11056143ATL1675--- -----1AA005J	首次完全充电 1cyc fully charged	40.9223	4.368	40.9212	4.360	0.00%	99.82%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA0011	首次完全充电 1cyc fully charged	40.7909	4.368	40.7897	4.359	0.00%	99.79%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA002B	首次完全充电 1cyc fully charged	41.0107	4.367	41.0095	4.357	0.00%	99.77%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA006F	首次完全充电 1cyc fully charged	40.8784	4.369	40.8774	4.361	0.00%	99.82%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA008X	首次完全充电 1cyc fully charged	40.9938	4.368	40.9923	4.359	0.00%	99.79%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA002K	首次完全充电 1cyc fully charged	40.8495	4.366	40.8481	4.358	0.00%	99.82%	O
8S%SNN5982A%A0 11056143ATL166D--- -----1AA0063	首次完全充电 1cyc fully charged	40.8859	4.369	40.8835	4.359	0.01%	99.77%	O
8S%SNN5982A%A0 11056143ATL166D--- -----1AA0115	首次完全充电 1cyc fully charged	40.9828	4.369	40.9803	4.361	0.01%	99.82%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA003D	首次完全充电 1cyc fully charged	40.8907	4.369	40.8880	4.360	0.01%	99.79%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA006D	首次完全充电 1cyc fully charged	40.8480	4.368	40.8453	4.360	0.01%	99.82%	O
以下空白								

注: L-泄漏; V-排气; D-解体; R-破裂; F-起火; O-无泄漏, 无排气, 无解体, 无破裂, 无起火。
Note: L-Leakage, V-Venting, D-Disassembly, R-Rupture, F-Fire, O- No leakage, no venting, no disassembly, no rupture & no fire.

序号 No.	2	测试项目名称 Name of test items		温度试验 Thermal test				
样品编号 Sample No.	样品状态 Sample status	测试前 Before test		测试后 After test		质量损失 Mass loss (%)	剩余电压 Residual OCV (%)	测试结果 Test result
		电池质量 m_1 (g)	开路电压 U_1 (V)	电池质量 m_2 (g)	开路电压 U_2 (V)			
8S%SNN5982A%A0 11056143ATL1675--- -----1AA005J	首次完全充电 1cyc fully charged	40.9212	4.360	40.9175	4.272	0.01%	97.98%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA0011	首次完全充电 1cyc fully charged	40.7897	4.359	40.7852	4.270	0.01%	97.96%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA002B	首次完全充电 1cyc fully charged	41.0095	4.357	41.0073	4.252	0.01%	97.59%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA006F	首次完全充电 1cyc fully charged	40.8774	4.361	40.8750	4.273	0.01%	97.98%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA008X	首次完全充电 1cyc fully charged	40.9923	4.359	40.9895	4.270	0.01%	97.96%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA002K	首次完全充电 1cyc fully charged	40.8481	4.358	40.8462	4.269	0.00%	97.96%	O
8S%SNN5982A%A0 11056143ATL166D--- -----1AA0063	首次完全充电 1cyc fully charged	40.8835	4.359	40.8834	4.268	0.00%	97.91%	O
8S%SNN5982A%A0 11056143ATL166D--- -----1AA0115	首次完全充电 1cyc fully charged	40.9803	4.361	40.9798	4.276	0.00%	98.05%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA003D	首次完全充电 1cyc fully charged	40.8880	4.360	40.8868	4.269	0.00%	97.91%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA006D	首次完全充电 1cyc fully charged	40.8453	4.360	40.8426	4.272	0.01%	97.98%	O
以下空白								

注: L-泄漏; V-排气; D-解体; R-破裂; F-起火; O-无泄漏, 无排气, 无解体, 无破裂, 无起火。
 Note: L-Leakage, V-Venting, D-Disassembly, R-Rupture, F-Fire, O- No leakage, no venting, no disassembly, no rupture & no fire.

序号 No.	3	测试项目名称 Name of test items		振动 Vibration				
样品编号 Sample No.	样品状态 Sample status	测试前 Before test		测试后 After test		质量损失 Mass loss (%)	剩余电压 Residual OCV (%)	测试结果 Test result
		电池质量 m_1 (g)	开路电压 U_1 (V)	电池质量 m_2 (g)	开路电压 U_2 (V)			
8S%SNN5982A%A0 11056143ATL1675--- -----IAA005J	首次完全充电 1cyc fully charged	40.9175	4.272	40.9165	4.269	0.00%	99.93%	O
8S%SNN5982A%A0 11056143ATL1675--- -----IAA001I	首次完全充电 1cyc fully charged	40.7852	4.270	40.7845	4.267	0.00%	99.93%	O
8S%SNN5982A%A0 11056143ATL1675--- -----IAA002B	首次完全充电 1cyc fully charged	41.0073	4.252	41.0047	4.239	0.01%	99.69%	O
8S%SNN5982A%A0 11056143ATL1675--- -----IAA006F	首次完全充电 1cyc fully charged	40.8750	4.273	40.8726	4.269	0.01%	99.91%	O
8S%SNN5982A%A0 11056143ATL1675--- -----IAA008X	首次完全充电 1cyc fully charged	40.9895	4.270	40.9875	4.266	0.00%	99.91%	O
8S%SNN5982A%A0 11056143ATL1675--- -----IAA002K	首次完全充电 1cyc fully charged	40.8462	4.269	40.8437	4.265	0.01%	99.91%	O
8S%SNN5982A%A0 11056143ATL166D--- -----IAA0063	首次完全充电 1cyc fully charged	40.8834	4.268	40.8816	4.265	0.00%	99.93%	O
8S%SNN5982A%A0 11056143ATL166D--- -----IAA0115	首次完全充电 1cyc fully charged	40.9798	4.276	40.9778	4.272	0.00%	99.91%	O
8S%SNN5982A%A0 11056143ATL1675--- -----IAA003D	首次完全充电 1cyc fully charged	40.8868	4.269	40.8853	4.265	0.00%	99.91%	O
8S%SNN5982A%A0 11056143ATL1675--- -----IAA006D	首次完全充电 1cyc fully charged	40.8426	4.272	40.8411	4.269	0.00%	99.93%	O
以下空白								

注: L-泄漏; V-排气; D-解体; R-破裂; F-起火; O-无泄漏, 无排气, 无解体, 无破裂, 无起火。
Note: L-Leakage, V-Venting, D-Disassembly, R-Rupture, F-Fire, O- No leakage, no venting, no disassembly, no rupture & no fire.

序号 No.	4	测试项目名称 Name of test items		冲击 Shock				
样品编号 Sample No.	样品状态 Sample status	测试前 Before test		测试后 After test		质量损失 Mass loss (%)	剩余电压 Residual OCV (%)	测试结果 Test result
		电池质量 m_1 (g)	开路电压 U_1 (V)	电池质量 m_2 (g)	开路电压 U_2 (V)			
8S%SNN5982A%A0 11056143ATL1675--- -----1AA005J	首次完全充电 1cyc fully charged	40.9165	4.269	40.9155	4.268	0.00%	99.98%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA0011	首次完全充电 1cyc fully charged	40.7845	4.267	40.7838	4.266	0.00%	99.98%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA002B	首次完全充电 1cyc fully charged	41.0047	4.239	41.0041	4.237	0.00%	99.95%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA006F	首次完全充电 1cyc fully charged	40.8726	4.269	40.8712	4.267	0.00%	99.95%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA008X	首次完全充电 1cyc fully charged	40.9875	4.266	40.9855	4.264	0.00%	99.95%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA002K	首次完全充电 1cyc fully charged	40.8437	4.265	40.8422	4.263	0.00%	99.95%	O
8S%SNN5982A%A0 11056143ATL166D--- -----1AA0063	首次完全充电 1cyc fully charged	40.8816	4.265	40.8798	4.265	0.00%	100.00%	O
8S%SNN5982A%A0 11056143ATL166D--- -----1AA0115	首次完全充电 1cyc fully charged	40.9778	4.272	40.9758	4.270	0.00%	99.95%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA003D	首次完全充电 1cyc fully charged	40.8853	4.265	40.8838	4.264	0.00%	99.98%	O
8S%SNN5982A%A0 11056143ATL1675--- -----1AA006D	首次完全充电 1cyc fully charged	40.8411	4.269	40.8396	4.269	0.00%	100.00%	O
以下空白								

注: L-泄漏; V-排气; D-解体; R-破裂; F-起火; O-无泄漏, 无排气, 无解体, 无破裂, 无起火。

Note: L-Leakage, V-Venting, D-Disassembly, R-Rupture, F-Fire, O- No leakage, no venting, no disassembly, no rupture & no fire.

序号 No.	5	测试项目名称 Name of test items	外部短路 External short circuit		
样品编号 Sample No.	样品状态 Sample status	样品表面最高温度 Max. External Temperature (°C)	测试结果 Test result	备注 Remark	
8S%SNN5982A%A0 11056143ATL1675--- -----1AA005J	首次完全充电 1cyc fully charged	57.1	O	/	
8S%SNN5982A%A0 11056143ATL1675--- -----1AA0011	首次完全充电 1cyc fully charged	57.1	O	/	
8S%SNN5982A%A0 11056143ATL1675--- -----1AA002B	首次完全充电 1cyc fully charged	56.5	O	/	
8S%SNN5982A%A0 11056143ATL1675--- -----1AA006F	首次完全充电 1cyc fully charged	56.3	O	/	
8S%SNN5982A%A0 11056143ATL1675--- -----1AA008X	首次完全充电 1cyc fully charged	55.9	O	/	
8S%SNN5982A%A0 11056143ATL1675--- -----1AA002K	首次完全充电 1cyc fully charged	56.9	O	/	
8S%SNN5982A%A0 11056143ATL166D--- -----1AA0063	首次完全充电 1cyc fully charged	56.7	O	/	
8S%SNN5982A%A0 11056143ATL166D--- -----1AA0115	首次完全充电 1cyc fully charged	56.5	O	/	
8S%SNN5982A%A0 11056143ATL1675--- -----1AA003D	首次完全充电 1cyc fully charged	56.3	O	/	
8S%SNN5982A%A0 11056143ATL1675--- -----1AA006D	首次完全充电 1cyc fully charged	55.8	O	/	
以下空白					
注: D-解体; R-破裂; F-起火; O-无解体, 无破裂, 无起火。 Note: D-Disassembly, R-Rupture, F-Fire, O- No disassembly, no rupture & no fire.					

[illegible]

序号 No.	8	测试项目名称 Name of test items	强制放电 Forced discharge
样品编号 Sample No.	样品状态 Sample status	测试结果 Test result	备注 Remark
021653911456	首次完全放电 1cyc fully discharged	O	/
021653921498	首次完全放电 1cyc fully discharged	O	/
021653911472	首次完全放电 1cyc fully discharged	O	/
021653911428	首次完全放电 1cyc fully discharged	O	/
021653911411	首次完全放电 1cyc fully discharged	O	/
021653911554	首次完全放电 1cyc fully discharged	O	/
021653911327	首次完全放电 1cyc fully discharged	O	/
021653911382	首次完全放电 1cyc fully discharged	O	/
021653931029	首次完全放电 1cyc fully discharged	O	/
021653941446	首次完全放电 1cyc fully discharged	O	/
021653911192	50 次完全放电 50yc fully discharged	O	/
021653921040	50 次完全放电 50yc fully discharged	O	/
021653921462	50 次完全放电 50yc fully discharged	O	/
021653911188	50 次完全放电 50yc fully discharged	O	/
021653911268	50 次完全放电 50yc fully discharged	O	/
021653911944	50 次完全放电 50yc fully discharged	O	/
021653921612	50 次完全放电 50yc fully discharged	O	/
021653911542	50 次完全放电 50yc fully discharged	O	/
021653941595	50 次完全放电 50yc fully discharged	O	/
021653941305	50 次完全放电 50yc fully discharged	O	/
注: D-解体; F-起火; O-无解体, 无起火。 Note: D-Disassembly, F-Fire, O- No disassembly, no fire.			

声 明

Statement

1. 检测报告无本实验室公章无效。

The test report is invalid if not affixed the official seal of the laboratory to it.

2. 检测报告涂改无效。

The test report is invalid if it is blotted out.

3. 送样委托检测结果，仅对所送样品有效。

The conclusion of the consignment test is only valid for the provided sample.

4. 本报告未经本实验室书面许可，不可部分复制。

This report cannot be partial copied, without the written permission of Amperex Technology Limited Test Center.

东莞新能源科技有限公司测试中心

Dong guan Amperex Technology Limited Test Center

地址：中国广东省东莞市松山湖科技园工业西路 1 号

Addr.: West Industrial Road 1#, Songshan Lake Industry Park, Dongguan City,
Guangdong Province, P. R. China

电话 Tel. : +86-0769-88989149

传真 Fax.: +86-0769-88989483

网址 Website : www.atlbattery.com