



新普科技股份有限公司
新世電子(常熟)有限公司
新普科技(重慶)有限公司
華普電子(常熟)有限公司

Control Number: SLEU-2007006

Rechargeable Li-ion Battery UN38.3 Test Report

Recommendations on the TRANSPORT OF DANGEROUS GOODS

(Manual of Tests and Criteria, Sixth revised edition, Amend 1)

Customer: Lenovo

Model: L20M4P74

Rating/ Mass: 15.36V, Typical Capacity 3564mh/ 54.7Wh

Rated Capacity 3451mAh/ 53Wh /220 (g)

Issue date: 2020/07/30

Approved By	Checked By	Prepared By
Assistant Manager	Authorized Signatory	Test Engineer

●	SIMPLO TECHNOLOGY CO., LTD. ADD : No. 471 Pa Teh Rd, Sec 2 Hu Kou, Hsinchu Hsien, 303 Taiwan TEL: +886-3-5695920 FAX: +886-3-5695931	
	SIMPLO TECHNOLOGY (CHANGSHU) INC. ADD : No.888 Dongnan Avenue, Changshu New & Hi-Tech Industrial Development Zone, Changshu, Jiangsu, China TEL: +86-512-52302255 FAX: +86-512-52302277	
	SIMPLO TECHNOLOGY (CHONGQING) INC. ADD : No.2 Zongbao Avenue, Shapingba District, ChongQing, China TEL: +86-23-61718899 FAX: +86-23-61210488	
	HUAPU TECHNOLOGY (CHANGSHU) INC. ADD : No.888 Dongnan Avenue, Changshu New & Hi-Tech Industrial Development Zone, Changshu, Jiangsu, China TEL: +86-512-52302255 FAX: +86-512-52302277	

Email : Test_Lab@simplo.com.tw

Website : <http://www.simplo.com.tw/>

Form No. : W11-002-B05

本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效，本報告分離使用無效

Page 1 of 8

This test report is valid only to the items, Invalid for separation using.



新普科技股份有限公司
新世電子(常熟)有限公司
新普科技(重慶)有限公司
華普電子(常熟)有限公司

Control Number: SLEU-2007006

1. Purpose of the Test :

To test each cell/battery is of the type proved to meet the requirements in United Nations Recommendations on the TRANSPORT OF DANGEROUS GOODS, Manual of Tests and Criteria, Sixth revised edition, Amend 1, Section 38.3.

2. Test Result :

Test results of the UN Recommendations on the Transport of Dangerous Goods

No.	Test Item	Test results
T.1	Altitude simulation	PASS
T.2	Thermal test	PASS
T.3	Vibration test	PASS
T.4	Shock test	PASS
T.5	External short circuit	PASS
T.6	Impact, Crush test	PASS
T.7	Overcharge	PASS
T.8	Forced discharge	PASS

3. Test Lab: Email : Test_Lab@simplo.com.tw Website : <http://www.simplo.com.tw/>

●	SIMPLO (Taiwan) Laboratory ADD : No. 471 Pa Teh Rd, Sec 2 Hu Kou, Hsinchu Hsien, 303 Taiwan TEL: +886-3-5695920 FAX: +886-3-5695931
	SIMPLO (CHANGSHU) Laboratory ADD : No.888 Dongnan Avenue, Changshu New & Hi-Tech Industrial Development Zone, Changshu, Jiangsu, China TEL: +86-512-52302255 FAX: +86-512-52302277
	SIMPLO (CHONGQING) Laboratory. ADD : No.2 Zongbao Avenue, Shapingba District, ChongQing, China TEL: +86-23-61718899 FAX: +86-23-61210488

Form No. : W11-002-B05

本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效,本報告分離使用無效

Page 2 of 8

This test report is valid only to the items, Invalid for separation using.



新普科技股份有限公司
新世電子(常熟)有限公司
新普科技(重慶)有限公司
華普電子(常熟)有限公司

Control Number: SLEU-2007006

4. Product manufacturer : Email : Test_Lab@simplo.com.tw Website : <http://www.simplo.com.tw/>

●	SIMPLO TECHNOLOGY CO., LTD. ADD : No. 471 Pa Teh Rd, Sec 2 Hu Kou, Hsinchu Hsien, 303 Taiwan TEL: +886-3-5695920 FAX: +886-3-5695931
	SIMPLO TECHNOLOGY (CHANGSHU) INC. ADD : No.888 Dongnan Avenue, Changshu New & Hi-Tech Industrial Development Zone, Changshu, Jiangsu, China TEL: +86-512-52302255 FAX: +86-512-52302277
●	SIMPLO TECHNOLOGY (CHONGQING) INC. ADD : No.2 Zongbao Avenue, Shapingba District, ChongQing, China TEL: +86-23-61718899 FAX: +86-23-61210488
	HUAPU TECHNOLOGY (CHANGSHU) INC. ADD : No.888 Dongnan Avenue, Changshu New & Hi-Tech Industrial Development Zone, Changshu, Jiangsu, China TEL: +86-512-52302255 FAX: +86-512-52302277

5. Test Quantity :

- 5.1 Four batteries, at first cycle, in fully charged states. (For T.1~T.5)
- 5.2 Four batteries, after 25 cycles ending in fully charged states. (For T.1~T.5)
- 5.3 Five component cells, at first cycle at 50% of the design rated capacity. (For T.6)
- 5.4 Five component cells, after 25 cycles at 50% of the design rated capacity. (For T.6)
- 5.5 Four batteries, at first cycle, in fully charged states. (For T.7)
- 5.6 Four batteries, after 25 cycles ending in fully charged states. (For T.7)
- 5.7 Ten component cells, at first cycle in fully discharge states. (For T.8)
- 5.8 Ten component cells, after 25 cycles ending in fully discharged states. (For T.8)

Form No. : W11-002-B05

本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.


本測試報告僅對上述測試項目有效，本報告分離使用無效
This test report is valid only to the items, Invalid for separation using.



6. Test Procedure :

6.1 All detailed test procedures must be based on United Nations Recommendations on the TRANSPORT OF DANGEROUS GOODS, Manual of Tests and Criteria, Sixth revised edition, Amend 1, Section 38.3.

6.2 Test flow shall be followed as below.

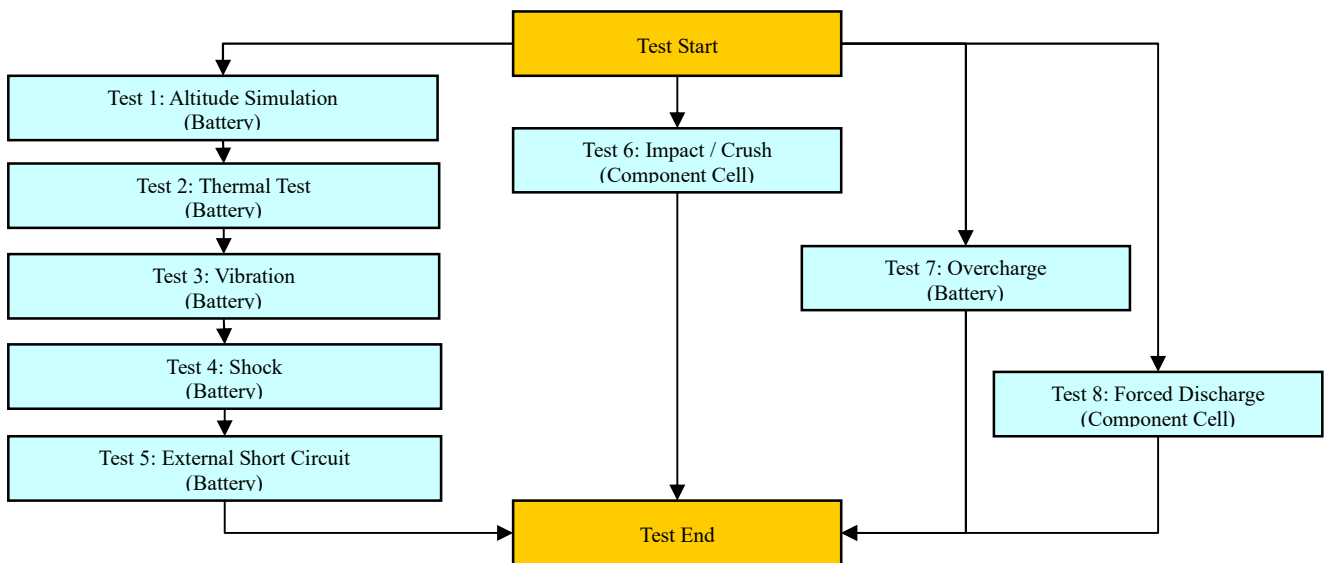

Conclusion: The samples had passed the test items of UN38.3.

7. Comment : NA



新普科技股份有限公司
新世電子(常熟)有限公司
新普科技(重慶)有限公司
華普電子(常熟)有限公司

Control Number: SLEU-2007006

8. Test Equipment :

SMP SIMPLO TECHNOLOGY CO., LTD.

Address : No.471, Sec.2, Pa Teh Rd., Hu Kou, Hsin Chu Hsien 303, Taiwan

TEL: +886-3-5695920; FAX: +886-3-5695931

Revised Date: 2020-07-30

Test Instruments Reference List								
Used	Instrument ID	Instrument Name	Type	Range of use	Manufacturer	Calibration Date_Last	Calibration Date_Next	Remarks
	Pretest							
V	ML-761	Learning	715C	0~18V 0~8A	SMP	2020/2/19	2021/3/19	
V	ML-762	Learning	715C	0~18V 0~8A	SMP	2020/1/2	2021/2/2	
V	ML-763	Learning	715C	0~18V 0~8A	SMP	2020/2/19	2021/3/19	
V	ML-764	Learning	715C	0~18V 0~8A	SMP	2020/1/2	2021/2/2	
	ML-925	Learning	750C8	0~60V 0~30A	SMP	2020/1/2	2021/2/2	
	T.1 Altitude Simulation							
V	ML-522	Altitude	SVT-120	kPa:30~90	HSIN JIANG	2020/7/1	2021/8/1	
V	ML-257	Multimeter	34401A	Note 1	Agilent	2019/9/2	2020/10/2	
V	ML-494	Electronic Balance	XS1220M-SCS	1-1220 gf	PRECISA	2020/7/1	2021/8/1	
	ML-523	Electronic Balance	MTW-30K	30*0.005kg		2019/8/16	2020/9/16	
V	ML-550	Data Logger	313	15~35 °C; 30~80 %RH	CENTER	2019/8/15	2020/9/15	
V	ML-964	Barometric Air Pressure	MP55	750 to 1100 mbar	KIMO	2019/8/6	2020/9/6	
	T.2 Thermal Test							
V	ML-789	Thermal Shock	GTST-080-65-AW	T:-40 to 100°C	GF	2019/8/16	2020/9/16	
V	ML-257	Multimeter	34401A	note 1	Agilent	2019/9/2	2020/10/2	
V	ML-494	Electronic Balance	XS1220M-SCS	1-1220 gf	PRECISA	2020/7/1	2021/8/1	
	ML-523	Electronic Balance	MTW-30K	30*0.005kg		2019/8/16	2020/9/16	
V	ML-551	Data Logger	313	15~35 °C; 30~80 %RH	CENTER	2019/8/15	2020/9/15	
	T.3 Vibration							
V	ML-233	Vibration	KD-9636-EM-300F2K-30N80	F:5~2000Hz G:0.2~20G	King Design	2019/8/7	2020/9/7	
V	ML-257	Multimeter	34401A	note 1	Agilent	2019/9/2	2020/10/2	
V	ML-494	Electronic Balance	XS1220M-SCS	1-1220 gf	PRECISA	2020/7/1	2021/8/1	
	ML-523	Electronic Balance	MTW-30K	30*0.005kg		2019/8/16	2020/9/16	
V	ML-552	Data Logger	313	15~35 °C; 30~80 %RH	CENTER	2019/8/15	2020/9/15	
	T.4 Shock							
V	ML-056	Shock	DP-1200-25	G:10~600G	King Design	2019/8/7	2020/9/7	
V	ML-257	Multimeter	34401A	note 1	Agilent	2019/9/2	2020/10/2	
V	ML-494	Electronic Balance	XS1220M-SCS	1-1220 gf	PRECISA	2020/7/1	2021/8/1	
	ML-523	Electronic Balance	MTW-30K	30*0.005kg		2019/8/16	2020/9/16	
V	ML-551	Data Logger	313	15~35 °C; 30~80 %RH	CENTER	2019/8/15	2020/9/15	
	T.5 External Short Circuit							
V	ML-894	Battery Hitester	BT3562	1mΩ ~ 30kΩ	HIOKI	2020/6/9	2021/7/9	
V	ML-459	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 200°C	Yokogawa	2019/8/16	2020/9/16	
V	ML-460	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 200°C	Yokogawa	2019/8/16	2020/9/16	
V	ML-521	Oven	9031	30~80 °C	YEOW LONG	2019/8/16	2020/9/16	
V	ML-952	Data Logger	313	15~35 °C; 30~80 %RH	CENTER	2020/7/2	2021/8/2	
	T.6 Impact / Crush							
V	ML-458	Data Acquisition	XL122-D	1-100 Vdc, -50 to 150°C	Yokogawa	2020/6/3	2021/7/3	
	ML-076	Impact Tester			JYI SHENG	2020/1/6	2021/2/6	
	ML-553	Crush Tester	BCT-01		Simplo	2020/4/8	2021/5/8	
V	ML-866	Crush Tester	M0654		JYI SHENG	2020/4/8	2021/5/8	
	ML-459	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 200°C	Yokogawa	2019/8/16	2020/9/16	

Form No. : W11-002-B05

本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效，本報告分離使用無效

This test report is valid only to the items, Invalid for separation using.



新普科技股份有限公司
新世電子(常熟)有限公司
新普科技(重慶)有限公司
華普電子(常熟)有限公司

Control Number: SLEU-2007006

SMP SIMPLO TECHNOLOGY CO., LTD.

Address : No.471, Sec.2, Pa Teh Rd., Hu Kou, Hsin Chu Hsien 303, Taiwan

TEL: +886-3-5695920; FAX: +886-3-5695931

Revised Date: 2020-07-30

Test Instruments Reference List								
Used	Instrument ID	Instrument Name	Type	Range of use	Manufacturer	Calibration Date_Last	Calibration Date_Next	Remarks
	T.7 Overcharge							
V	ML-482	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2020/5/7	2021/6/7	
V	ML-483	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2020/5/7	2021/6/7	
V	ML-484	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2020/5/7	2021/6/7	
V	ML-486	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2020/5/7	2021/6/7	
V	ML-487	Programmable DC Source	DS6024	1-60 Vdc, 0.3-24A	MOTECH	2020/5/7	2021/6/7	
V	ML-952	Data Logger	313	15~35 °C; 30~80 %RH	CENTER	2020/7/2	2021/8/2	
V	ML-459	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 200°C	Yokogawa	2019/8/16	2020/9/16	
V	ML-460	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 200°C	Yokogawa	2019/8/16	2020/9/16	
	ML-918	Overcharge & Forced discharge tester	T901	3~30 Vdc, Charge: 0.05~20A Discharge: 0.02~10A	SMP	2020/5/7	2021/6/7	
	T.8 Forced Discharge							
V	ML-132	Electronic Load	3311C	60V,60A, 300W	Prodigit	2020/2/20	2021/3/20	
V	ML-133	Electronic Load	3311C	60V,60A, 300W	Prodigit	2020/2/20	2021/3/20	
V	ML-136	Electronic Load	3311C	60V,60A, 300W	Prodigit	2020/2/20	2021/3/20	
V	ML-192	Electronic Load	3311C	60V,60A, 300W	Prodigit	2020/2/20	2021/3/20	
V	ML-269	Electronic Load	3311C	60V,60A, 300W	Prodigit	2020/2/20	2021/3/20	
V	ML-532	DC Electronic Load	33511-01	120V, 240A, 3600W	Prodigit	2020/7/1	2021/8/1	
V	ML-482	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2020/5/7	2021/6/7	
V	ML-483	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2020/5/7	2021/6/7	
V	ML-484	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2020/5/7	2021/6/7	
V	ML-486	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2020/5/7	2021/6/7	
V	ML-487	Programmable DC Source	DS6024	1-60 Vdc, 0.3-24A	MOTECH	2020/5/7	2021/6/7	
V	ML-952	Data Logger	313	15~35 °C; 30~80 %RH	CENTER	2020/7/2	2021/8/2	
V	ML-459	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 200°C	Yokogawa	2019/8/16	2020/9/16	
V	ML-460	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 200°C	Yokogawa	2019/8/16	2020/9/16	
	ML-918	Overcharge & Forced discharge tester	T901	3~30 Vdc, Charge: 0.05~20A Discharge: 0.02~10A	SMP	2020/5/7	2021/6/7	
Note 1: DC Voltage: 0.1-1000V; AC Voltage: 0.5-700V at 60Hz, 1kHz; Resistance: 10Ω-10MΩ; DC Current: 0.1mA-3A; AC Current: 0.01-3A at 60Hz, 0.01-1A, at 1kHz.								

Form No. : W11-002-B05

本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效,本報告分離使用無效

Page 6 of 8

This test report is valid only to the items, Invalid for separation using.



新普科技股份有限公司
新世電子(常熟)有限公司
新普科技(重慶)有限公司
華普電子(常熟)有限公司

Control Number: SLEU-2007006

9. T.1~T.8 Detail Reports:

UN 38.3 Test Datasheet UN38.3/ST/SG/AC.10/11/Rev.6/Amend.1

Control Number: SLEU-2007006	Customer: Lenovo	Model Name: L20M4P74	SMP Project Name: Serval_NEC
Pack P/N: 931QA200H (A)(B)	Configuration: 4S1P	Test Duration: 2020/07/13~2020/07/30	Reviewer: Esmond
Cell Vendor: ATL	Cell Model: 526264	N/A	N/A

Test Sample Identification: ☐ Large Battery ☒ Small Battery ☐ Single-cell Battery

Battery Pack						Component Cell		
Used	Sample No.	Sample State	Used	Sample No.	Sample State	Used	Sample No.	Sample State
V	01~04	1 Cycle, Fully charged	V	05~08	25 Cycles, Fully charged	V	01C~05C	1 Cycle, 50% SOC
V	09~12	1 Cycle, Fully charged	V	13~16	25 Cycles, Fully charged	V	06C~10C	25 Cycles, 50% SOC
						V	11C~20C	1 Cycle, Fully discharged (0% SOC)
						V	21C~30C	25 Cycles, Fully discharged (0% SOC)

T.1 Altitude Simulation

Start time: 2020/07/20 08:40		Ambient temp.: 24.6 °C						Operator: Betty	
Finish time: 2020/07/20 15:48		Sample 01	Sample 02	Sample 03	Sample 04	Sample 05	Sample 06	Sample 07	Sample 08
OCV (V)	Before	17.015	17.022	17.019	17.024	17.016	17.012	17.020	17.017
	After	16.997	17.010	16.999	17.009	16.999	17.000	17.007	17.002
	Residual OCV %	99.89%	99.93%	99.88%	99.91%	99.90%	99.93%	99.92%	99.91%
Mass (g)	Before	220.121	219.834	220.130	220.058	219.962	219.877	220.106	219.915
	After	220.116	219.827	220.124	220.051	219.957	219.871	220.098	219.908
	Mass loss %	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
Results		P	P	P	P	P	P	P	P

T.2 Thermal Test

Start time: 2020/07/20 16:10		Ambient temp.: 24.8 °C						Operator: Betty	
Finish time: 2020/07/27 09:04		Sample 01	Sample 02	Sample 03	Sample 04	Sample 05	Sample 06	Sample 07	Sample 08
OCV (V)	Before	16.997	17.010	16.999	17.009	16.999	17.000	17.007	17.002
	After	16.811	16.828	16.812	16.821	16.813	16.817	16.820	16.820
	Residual OCV %	98.91%	98.93%	98.90%	98.89%	98.91%	98.92%	98.90%	98.93%
Mass (g)	Before	220.116	219.827	220.124	220.051	219.957	219.871	220.098	219.908
	After	220.101	219.810	220.104	220.032	219.941	219.851	220.081	219.888
	Mass loss %	0.01%	0.01%	0.01%	0.01%	0.01%	0.01%	0.01%	0.01%
Results		P	P	P	P	P	P	P	P

T.3 Vibration

Start time: 2020/07/27 09:25		Ambient temp.: 25.1 °C						Operator: Betty	
Finish time: 2020/07/28 09:05		Sample 01	Sample 02	Sample 03	Sample 04	Sample 05	Sample 06	Sample 07	Sample 08
OCV (V)	Before	16.811	16.828	16.812	16.821	16.813	16.817	16.820	16.820
	After	16.801	16.811	16.799	16.810	16.797	16.802	16.808	16.805
	Residual OCV %	99.94%	99.90%	99.92%	99.93%	99.90%	99.91%	99.93%	99.91%
Mass (g)	Before	220.101	219.810	220.104	220.032	219.941	219.851	220.081	219.888
	After	220.096	219.803	220.098	220.026	219.936	219.844	220.076	219.881
	Mass loss %	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
Results		P	P	P	P	P	P	P	P

T.4 Shock

Start time: 2020/07/28 09:27		Ambient temp.: 24.9 °C						Operator: Betty	
Finish time: 2020/07/28 14:00		Sample 01	Sample 02	Sample 03	Sample 04	Sample 05	Sample 06	Sample 07	Sample 08
OCV (V)	Before	16.801	16.811	16.799	16.810	16.797	16.802	16.808	16.805
	After	16.788	16.801	16.787	16.795	16.787	16.788	16.792	16.795
	Residual OCV %	99.92%	99.94%	99.93%	99.91%	99.94%	99.92%	99.90%	99.94%
Mass (g)	Before	220.096	219.803	220.098	220.026	219.936	219.844	220.076	219.881
	After	220.093	219.799	220.096	220.021	219.933	219.840	220.073	219.878
	Mass loss %	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
Results		P	P	P	P	P	P	P	P

Form No. : W11-002-B05

本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效，本報告分離使用無效

This test report is valid only to the items, Invalid for separation using.



新普科技股份有限公司
新世電子(常熟)有限公司
新普科技(重慶)有限公司
華普電子(常熟)有限公司

Control Number: SLEU-2007006

T.5 External Short Circuit

Start time: 2020/07/29 09:20	Ambient temp.: 25.0 °C				Operator: Betty			
Finish time: 2020/07/29 17:50	Sample 01	Sample 02	Sample 03	Sample 04	Sample 05	Sample 06	Sample 07	Sample 08
OCV (V)	Before	16.774	16.785	16.774	16.780	16.773	16.777	16.781
	After	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Resistance (<100mΩ)	56.5	57.0	56.2	59.3	58.1	55.9	59.4	57.7
Max Temp. (< 170°C)	57.2	57.6	57.5	57.8	57.4	57.3	57.7	57.1
Results	P	P	P	P	P	P	P	P

T.6 Impact / Crush (Component Cell)

UN38.3/ST/SG/AC.10/11/Rev.6/Amend.1

☐ Impact - Cylindrical cells not less than 18.0 mm in diameter

☒ Crush - Prismatic, pouch, coin/button cells and cylindrical cells less than 18.0 mm in diameter

Start time: 2020/07/21 09:43	Ambient temp.: 24.7 °C				Operator: Betty	
Finish time: 2020/07/21 15:50	Sample 01C	Sample 02C	Sample 03C	Sample 04C	Sample 05C	
Initial OCV (V)	3.801	3.797	3.795	3.805	3.802	
Max Temp. (< 170°C)	24.1	24.5	23.8	23.5	24.0	
Results	P	P	P	P	P	
Sample No.	Sample 06C	Sample 07C	Sample 08C	Sample 09C	Sample 10C	
Initial OCV (V)	3.793	3.800	3.808	3.794	3.799	
Max Temp. (< 170°C)	23.6	23.4	24.2	24.4	23.9	
Results	P	P	P	P	P	


T.7 Overcharge

Start time: 2020/07/20 10:51	Ambient temp.: 25.0 °C				Operator: Betty			
Finish time: 2020/07/29 12:00	Sample 09	Sample 10	Sample 11	Sample 12	Sample 13	Sample 14	Sample 15	Sample 16
Initial OCV (V)	17.010	17.024	17.017	17.026	17.021	17.015	17.028	17.012
Results	P	P	P	P	P	P	P	P

T.8 Forced Discharge (Component Cell)

Start time: 2020/07/22 09:03	Ambient temp.: 24.6 °C				Operator: Betty			
Finish time: 2020/07/30 10:22	Sample 11C	Sample 12C	Sample 13C	Sample 14C	Sample 15C	Sample 16C	Sample 17C	Sample 18C
Initial OCV (V)	3.442	3.470	3.461	3.455	3.466	3.449	3.471	3.458
Results	P	P	P	P	P	P	P	P
Sample No.	Sample 19C	Sample 20C	Sample 21C	Sample 22C	Sample 23C	Sample 24C	Sample 25C	Sample 26C
Initial OCV (V)	3.475	3.454	3.440	3.462	3.477	3.453	3.446	3.451
Results	P	P	P	P	P	P	P	P
Sample No.	Sample 27C	Sample 28C	Sample 29C	Sample 30C				
Initial OCV (V)	3.460	3.444	3.474	3.452				
Results	P	P	P	P				

9. Test Sample:

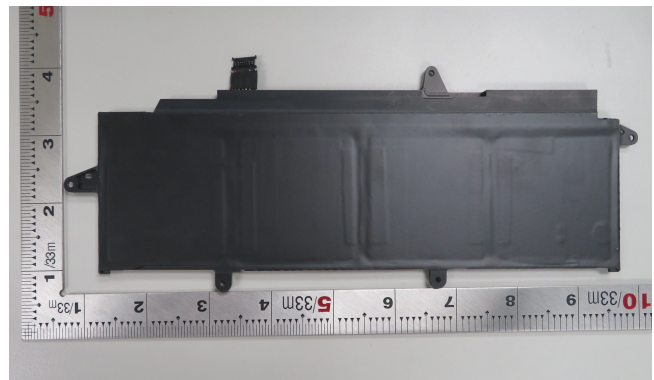

Form No. : W11-002-B05

本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效，本報告分離使用無效

This test report is valid only to the items, Invalid for separation using.