



新普科技股份有限公司
新世電子(常熟)有限公司
新普科技(重慶)有限公司
華普電子(常熟)有限公司

Control Number: SLEU-2008008

Rechargeable Li-ion Battery UN38.3 Test Report

Recommendations on the TRANSPORT OF DANGEROUS GOODS

(Manual of Tests and Criteria, Sixth revised edition, Amend 1)


Customer: Lenovo

Model: L18M4P72

Rating/ Mass: 15.36V, Typical Capacity 3321mAh/ 51Wh

Rated Capacity 3230mAh/ 49Wh /207 (g)

Issue date: 2020/08/03

Approved By	Checked By	Prepared By
Project Manager	Authorized Signatory	Test Engineer
		

●	SIMPLO TECHNOLOGY CO., LTD. ADD : No. 471 Pa Teh Rd, Sec 2 Hu Kou, Hsinchu Hsien, 303 Taiwan TEL: +886-3-5695920 FAX: +886-3-5695931	
	SIMPLO TECHNOLOGY (CHANGSHU) INC. ADD : No.888 Dongnan Avenue, Changshu New & Hi-Tech Industrial Development Zone, Changshu, Jiangsu, China TEL: +86-512-52302255 FAX: +86-512-52302277	
	SIMPLO TECHNOLOGY (CHONGQING) INC. ADD : No.2 Zongbao Avenue, Shapingba District, ChongQing, China TEL: +86-23-61718899 FAX: +86-23-61210488	
	HUAPU TECHNOLOGY (CHANGSHU) INC. ADD : No.888 Dongnan Avenue, Changshu New & Hi-Tech Industrial Development Zone, Changshu, Jiangsu, China TEL: +86-512-52302255 FAX: +86-512-52302277	

Email : Test_Lab@simplo.com.tw

Website : <http://www.simplo.com.tw/>

Form No. : W11-002-B05

本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效，本報告分離使用無效

Page 1 of 8

This test report is valid only to the items, Invalid for separation using.



新普科技股份有限公司
新世電子(常熟)有限公司
新普科技(重慶)有限公司
華普電子(常熟)有限公司

Control Number: SLEU-2008008

1. Purpose of the Test :

To test each cell/battery is of the type proved to meet the requirements in United Nations Recommendations on the TRANSPORT OF DANGEROUS GOODS, Manual of Tests and Criteria, Sixth revised edition, Amend 1, Section 38.3.

2. Test Result :

Test results of the UN Recommendations on the Transport of Dangerous Goods

No.	Test Item	Test results
T.1	Altitude simulation	PASS
T.2	Thermal test	PASS
T.3	Vibration test	PASS
T.4	Shock test	PASS
T.5	External short circuit	PASS
T.6	Impact, Crush test	PASS
T.7	Overcharge	PASS
T.8	Forced discharge	PASS

3. Test Lab: Email : Test_Lab@simplo.com.tw Website : <http://www.simplo.com.tw/>

●	SIMPLO (Taiwan) Laboratory ADD : No. 471 Pa Teh Rd, Sec 2 Hu Kou, Hsinchu Hsien, 303 Taiwan TEL: +886-3-5695920 FAX: +886-3-5695931
	SIMPLO (CHANGSHU) Laboratory ADD : No.888 Dongnan Avenue, Changshu New & Hi-Tech Industrial Development Zone, Changshu, Jiangsu, China TEL: +86-512-52302255 FAX: +86-512-52302277
	SIMPLO (CHONGQING) Laboratory. ADD : No.2 Zongbao Avenue, Shapingba District, ChongQing, China TEL: +86-23-61718899 FAX: +86-23-61210488

Form No. : W11-002-B05

本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效,本報告分離使用無效

This test report is valid only to the items, Invalid for separation using.



新普科技股份有限公司
新世電子(常熟)有限公司
新普科技(重慶)有限公司
華普電子(常熟)有限公司

Control Number: SLEU-2008008

4. Product manufacturer : Email : Test_Lab@simplo.com.tw Website : <http://www.simplo.com.tw/>

●	SIMPLO TECHNOLOGY CO., LTD. ADD : No. 471 Pa Teh Rd, Sec 2 Hu Kou, Hsinchu Hsien, 303 Taiwan TEL: +886-3-5695920 FAX: +886-3-5695931
	SIMPLO TECHNOLOGY (CHANGSHU) INC. ADD : No.888 Dongnan Avenue, Changshu New & Hi-Tech Industrial Development Zone, Changshu, Jiangsu, China TEL: +86-512-52302255 FAX: +86-512-52302277
●	SIMPLO TECHNOLOGY (CHONGQING) INC. ADD : No.2 Zongbao Avenue, Shapingba District, ChongQing, China TEL: +86-23-61718899 FAX: +86-23-61210488
	HUAPU TECHNOLOGY (CHANGSHU) INC. ADD : No.888 Dongnan Avenue, Changshu New & Hi-Tech Industrial Development Zone, Changshu, Jiangsu, China TEL: +86-512-52302255 FAX: +86-512-52302277

5. Test Quantity :

- 5.1 Four batteries, at first cycle, in fully charged states. (For T.1~T.5)
- 5.2 Four batteries, after 25 cycles ending in fully charged states. (For T.1~T.5)
- 5.3 Five component cells, at first cycle at 50% of the design rated capacity. (For T.6)
- 5.4 Five component cells, after 25 cycles at 50% of the design rated capacity. (For T.6)
- 5.5 Four batteries, at first cycle, in fully charged states. (For T.7)
- 5.6 Four batteries, after 25 cycles ending in fully charged states. (For T.7)
- 5.7 Ten component cells, at first cycle in fully discharge states. (For T.8)
- 5.8 Ten component cells, after 25 cycles ending in fully discharged states. (For T.8)

Form No. : W11-002-B05

本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效，本報告分離使用無效

Page 3 of 8


This test report is valid only to the items, Invalid for separation using.



6. Test Procedure :

6.1 All detailed test procedures must be based on United Nations Recommendations on the TRANSPORT OF DANGEROUS GOODS, Manual of Tests and Criteria, Sixth revised edition, Amend 1, Section 38.3.

6.2 Test flow shall be followed as below.

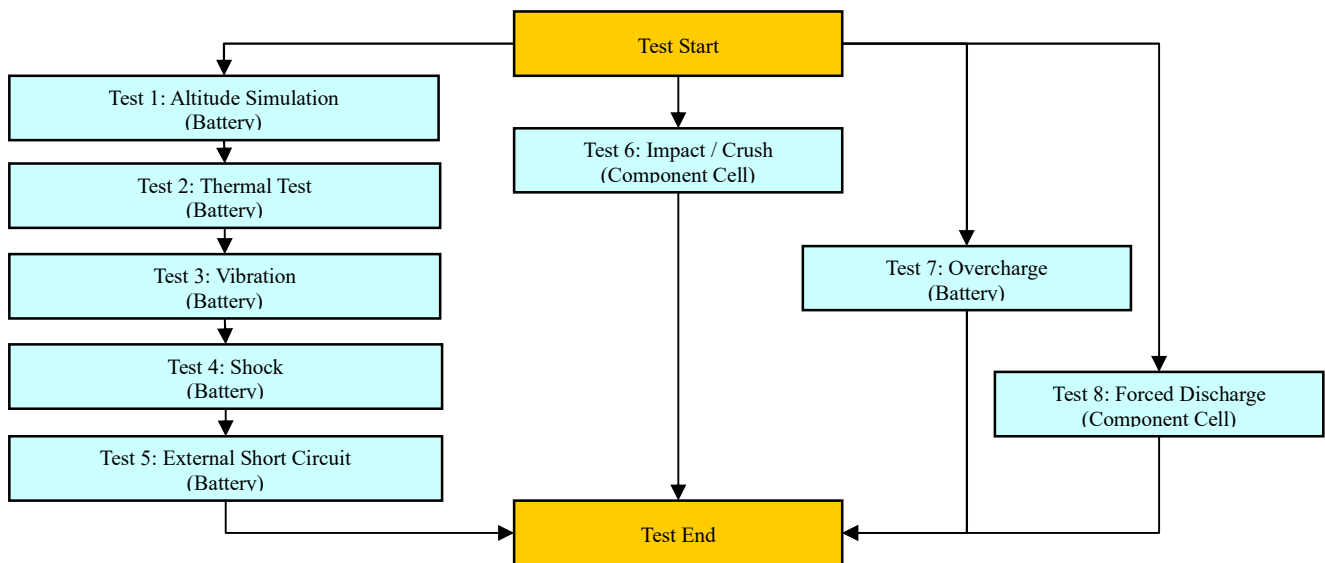

Conclusion: The samples had passed the test items of UN38.3.

7. Comment :

7.1 Due to the change of label, the sample picture need to modify, this report have been updated.
(The control number of old report: SLEU-2008001)



新普科技股份有限公司
新世電子(常熟)有限公司
新普科技(重慶)有限公司
華普電子(常熟)有限公司

Control Number: SLEU-2008008

8. Test Equipment :

SMP SIMPLO TECHNOLOGY CO., LTD.

Address : No.471, Sec.2, Pa Teh Rd., Hu Kou, Hsin Chu Hsien 303, Taiwan

TEL: +886-3-5695920; FAX: +886-3-5695931

Revised Date: 2018-11-01

Test Instruments Reference List								
Used	Instrument ID	Instrument Name	Type	Range of use	Manufacturer	Calibration Date_Last	Calibration Date_Next	Remarks
	Pretest							
V	ML-761	Learning	715C	0~18V 0~8A	SMP	2018/2/26	2019/2/26	
V	ML-762	Learning	715C	0~18V 0~8A	SMP	2018/1/3	2019/1/3	
V	ML-763	Learning	715C	0~18V 0~8A	SMP	2018/2/26	2019/2/26	
V	ML-764	Learning	715C	0~18V 0~8A	SMP	2018/1/3	2019/1/3	
	ML-925	Learning	750C8	0~60V 0~30A	SMP	2018/1/3	2019/1/3	
	T.1 Altitude Simulation							
V	ML-522	Altitude	SVT-120	Kpa:30~90	HSIN JIANG	2018/7/18	2019/7/18	
V	ML-257	Multimeter	HP 34401A	Note 1	Agilent	2018/3/1	2019/3/1	
V	ML-494	Electronic Balance	XS1220M-SCS	1-1220 gf	CHUANHUA	2018/7/18	2019/7/18	
	ML-523	Electronic Balance	MTW-30K	30*0.005Kg		2018/9/12	2019/9/12	
V	ML-550	Data Logger	313	15~35 ℃; 30~80 %RH	CENTER	2018/9/18	2019/9/18	
	T.2 Thermal Test							
V	ML-789	Thermal Shock	GTST-080-65-AW	T:-40 to 120℃	GF	2018/1/3	2019/1/3	
V	ML-257	Multimeter	HP 34401A	note 1	Agilent	2018/3/1	2019/3/1	
	ML-494	Electronic Balance	XS1220M-SCS	1-1220 gf	CHUANHUA	2018/7/18	2019/7/18	
	ML-523	Electronic Balance	MTW-30K	30*0.005Kg		2018/9/12	2019/9/12	
V	ML-551	Data Logger	313	15~35 ℃; 30~80 %RH	CENTER	2018/9/18	2019/9/18	
	T.3 Vibration							
V	ML-233	Vibration	KD-9636-EM-300F2K-30N80	F:5~2000Hz G:0.2~20G	King Design	2018/8/24	2019/8/24	
V	ML-257	Multimeter	HP 34401A	note 1	Agilent	2018/3/1	2019/3/1	
	ML-494	Electronic Balance	XS1220M-SCS	1-1220 gf	CHUANHUA	2018/7/18	2019/7/18	
	ML-523	Electronic Balance	MTW-30K	30*0.005Kg		2018/9/12	2019/9/12	
V	ML-552	Data Logger	313	15~35 ℃; 30~80 %RH	CENTER	2018/9/18	2019/9/18	
	T.4 Shock							
V	ML-056	Shock	DP-1200-25	G:10~600G	King Design	2018/8/24	2019/8/24	
V	ML-257	Multimeter	HP 34401A	note 1	Agilent	2018/3/1	2019/3/1	
	ML-494	Electronic Balance	XS1220M-SCS	1-1220 gf	CHUANHUA	2018/7/18	2019/7/18	
	ML-523	Electronic Balance	MTW-30K	30*0.005Kg		2018/9/12	2019/9/12	
V	ML-551	Data Logger	313	15~35 ℃; 30~80 %RH	CENTER	2018/9/18	2019/9/18	
	T.5 External Short Circuit							
V	ML-534	mΩ Hitester	3540	1mΩ ~ 30kΩ	HIOKI	2018/9/18	2019/9/18	
V	ML-459	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 150℃	Yokogawa	2018/9/12	2019/9/12	
V	ML-460	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 150℃	Yokogawa	2018/9/12	2019/9/12	
V	ML-521	Oven	9031	30~80 ℃	YEOW LONG	2018/9/12	2019/9/12	
V	ML-549	Data Logger	313	15~35 ℃; 30~80 %RH	CENTER	2018/9/18	2019/9/18	
	T.6 Impact / Crush							
V	ML-339	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 150℃	Yokogawa	2018/5/17	2019/5/17	
	ML-076	Impact Tester			JYI SHENG	2018/1/3	2019/1/3	
	ML-553	Crush Tester	BCT-01		Simplo	2018/5/16	2019/5/16	
V	ML-866	Crush Tester	M0654		JYI SHENG	2018/4/9	2019/4/9	
	ML-459	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 150℃	Yokogawa	2018/9/12	2019/9/12	

Form No. : W11-002-B05

本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效，本報告分離使用無效

Page 5 of 8

This test report is valid only to the items, Invalid for separation using.



新普科技股份有限公司
新世電子(常熟)有限公司
新普科技(重慶)有限公司
華普電子(常熟)有限公司

Control Number: SLEU-2008008

SMP SIMPLO TECHNOLOGY CO., LTD.

Address : No.471, Sec.2, Pa Teh Rd., Hu Kou, Hsin Chu Hsien 303, Taiwan
TEL: +886-3-5695920; FAX: +886-3-5695931

Revised Date: 2018-11-01

Test Instruments Reference List								
Used	Instrument ID	Instrument Name	Type	Range of use	Manufacturer	Calibration Date_Last	Calibration Date_Next	Remarks
	T.7 Overcharge							
	ML-482	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2018/5/17	2019/5/17	
	ML-483	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2018/5/17	2019/5/17	
	ML-484	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2018/5/17	2019/5/17	
	ML-486	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2018/5/17	2019/5/17	
	ML-487	Programmable DC Source	DS6024	1-60 Vdc, 0.3-24A	MOTECH	2018/5/17	2019/5/17	
V	ML-549	Data Logger	313	15~35 °C; 30~80 %RH	CENTER	2018/9/18	2019/9/18	
	ML-459	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 150°C	Yokogawa	2018/9/12	2019/9/12	
	ML-460	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 150°C	Yokogawa	2018/9/12	2019/9/12	
V	ML-918	Overcharge & Forced discharge tester	T901	3~30 Vdc, Charge: 0.05~20A Discharge: 0.02~10A	SMP	2018/5/17	2019/5/17	
	T.8 Forced Discharge							
	ML-132	Electronic Load	3311C	60V,55A, 300W	Prodigit	2018/3/1	2019/3/1	
	ML-133	Electronic Load	3311C	60V,55A, 300W	Prodigit	2018/3/1	2019/3/1	
	ML-136	Electronic Load	3311C	60V,55A, 300W	Prodigit	2018/3/1	2019/3/1	
	ML-192	Electronic Load	3311C	60V,55A, 300W	Prodigit	2018/3/1	2019/3/1	
	ML-269	Electronic Load	3311C	60V,55A, 300W	Prodigit	2018/3/1	2019/3/1	
	ML-532	DC Electronic Load	33511-01	120V, 240A, 3600W	Prodigit	2018/7/18	2019/7/18	
	ML-482	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2018/5/17	2019/5/17	
	ML-483	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2018/5/17	2019/5/17	
	ML-484	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2018/5/17	2019/5/17	
	ML-486	Programmable DC Source	DS10014	1-100Vdc, 0.3-14.4A	MOTECH	2018/5/17	2019/5/17	
	ML-487	Programmable DC Source	DS6024	1-60 Vdc, 0.3-24A	MOTECH	2018/5/17	2019/5/17	
V	ML-549	Data Logger	313	15~35 °C; 30~80 %RH	CENTER	2018/9/18	2019/9/18	
	ML-459	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 150°C	Yokogawa	2018/9/12	2019/9/12	
	ML-460	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 150°C	Yokogawa	2018/9/12	2019/9/12	
V	ML-918	Overcharge & Forced discharge tester	T901	3~30 Vdc, Charge: 0.05~20A Discharge: 0.02~10A	SMP	2018/5/17	2019/5/17	
Note 1: DC Voltage: 0.1-1000V; AC Voltage: 0.5-700V at 60Hz, 1kHz; Resistance: 10Ω-10MΩ; DC Current: 0.1mA-3A; AC Current: 0.01-3A at 60Hz, 0.01-1A, at 1kHz.								

SMP SIMPLO TECHNOLOGY CO., LTD.

Address : No.471, Sec.2, Pa Teh Rd., Hu Kou, Hsin Chu Hsien 303, Taiwan
TEL: +886-3-5695920; FAX: +886-3-5695931

Revised Date: 2020-08-03

Test Instruments Reference List								
Used	Instrument ID	Instrument Name	Type	Range of use	Manufacturer	Calibration Date_Last	Calibration Date_Next	Remarks
	Pretest							
V	ML-761	Learning	715C	0~18V 0~8A	SMP	2020/2/19	2021/3/19	
V	ML-762	Learning	715C	0~18V 0~8A	SMP	2020/1/2	2021/2/2	
V	ML-763	Learning	715C	0~18V 0~8A	SMP	2020/2/19	2021/3/19	
V	ML-764	Learning	715C	0~18V 0~8A	SMP	2020/1/2	2021/2/2	
	ML-925	Learning	750C8	0~60V 0~30A	SMP	2020/1/2	2021/2/2	
	T.6 Impact / Crush							
V	ML-458	Data Acquisition	XL122-D	1-100 Vdc, -50 to 150°C	Yokogawa	2020/6/3	2021/7/3	
	ML-076	Impact Tester			JYI SHENG	2020/1/6	2021/2/6	
	ML-553	Crush Tester	BCT-01		Simplo	2020/4/8	2021/5/8	
V	ML-866	Crush Tester	M0654		JYI SHENG	2020/4/8	2021/5/8	
	ML-459	Data Acquisition	MX100-E-1D	1-100 Vdc, -50 to 200°C	Yokogawa	2019/8/16	2020/9/16	

Form No. : W11-002-B05

本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效，本報告分離使用無效

Page 6 of 8

This test report is valid only to the items, Invalid for separation using.



新普科技股份有限公司
新世電子(常熟)有限公司
新普科技(重慶)有限公司
華普電子(常熟)有限公司

Control Number: SLEU-2008008

9. T.1~T.8 Detail Reports:

UN 38.3 Test Datasheet UN38.3/ST/SG/AC.10/11/Rev.6/Amend.1

Control Number: SLEU-2008008	Customer: Lenovo	Model Name: L18M4P72	SMP Project Name: Ratchet & Knockout
Pack P/N: 931QA213H (B)	Configuration: 4S1P	Test Duration: 2018/10/02~2018/10/31 2020/07/27~2020/08/03	Reviewer: Esmond
Cell Vendor: ATL	Cell Model: 4341B0	N/A	N/A

Test Sample Identification: ☐ Large Battery ☒ Small Battery ☐ Single-cell Battery

Battery Pack						Component Cell		
Used	Sample No.	Sample State	Used	Sample No.	Sample State	Used	Sample No.	Sample State
V	01~04	1 Cycle, Fully charged	V	05~08	25 Cycles, Fully charged	V	01C~05C	1 Cycle, 50% SOC
V	09~12	1 Cycle, Fully charged	V	13~16	25 Cycles, Fully charged	V	06C~10C	25 Cycles, 50% SOC
						V	11C~20C	1 Cycle, Fully discharged (0% SOC)
						V	21C~30C	25 Cycles, Fully discharged (0% SOC)

T.1 Altitude Simulation

Start time: 2018/10/17 09:00		Ambient temp.: 24.2 °C						Operator: Mia	
Finish time: 2018/10/17 15:30		Sample 01	Sample 02	Sample 03	Sample 04	Sample 05	Sample 06	Sample 07	Sample 08
OCV (V)	Before	17.115	17.132	17.128	17.141	17.107	17.124	17.136	17.133
	After	17.108	17.128	17.119	17.132	17.102	17.112	17.126	17.127
	Residual OCV %	99.96%	99.98%	99.95%	99.95%	99.97%	99.93%	99.94%	99.96%
Mass (g)	Before	207.621	207.511	207.529	207.583	207.554	207.618	207.633	207.567
	After	207.613	207.507	207.522	207.575	207.548	207.609	207.628	207.563
	Mass loss %	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
Results		P	P	P	P	P	P	P	P

T.2 Thermal Test

Start time: 2018/10/17 16:50		Ambient temp.: 23.7 °C						Operator: Mia	
Finish time: 2018/10/24 10:00		Sample 01	Sample 02	Sample 03	Sample 04	Sample 05	Sample 06	Sample 07	Sample 08
OCV (V)	Before	17.108	17.128	17.119	17.132	17.102	17.112	17.126	17.127
	After	16.922	16.952	16.940	16.943	16.910	16.930	16.941	16.949
	Residual OCV %	98.91%	98.97%	98.95%	98.90%	98.88%	98.94%	98.92%	98.96%
Mass (g)	Before	207.613	207.507	207.522	207.575	207.548	207.609	207.628	207.563
	After	207.594	207.487	207.508	207.562	207.536	207.592	207.613	207.545
	Mass loss %	0.01%	0.01%	0.01%	0.01%	0.01%	0.01%	0.01%	0.01%
Results		P	P	P	P	P	P	P	P

T.3 Vibration

Start time: 2018/10/24 10:20		Ambient temp.: 24.1 °C						Operator: Mia	
Finish time: 2018/10/25 10:30		Sample 01	Sample 02	Sample 03	Sample 04	Sample 05	Sample 06	Sample 07	Sample 08
OCV (V)	Before	16.922	16.952	16.940	16.943	16.910	16.930	16.941	16.949
	After	16.906	16.944	16.935	16.936	16.899	16.920	16.930	16.936
	Residual OCV %	99.91%	99.95%	99.97%	99.96%	99.93%	99.94%	99.94%	99.92%
Mass (g)	Before	207.594	207.487	207.508	207.562	207.536	207.592	207.613	207.545
	After	207.591	207.486	207.508	207.558	207.536	207.591	207.608	207.545
	Mass loss %	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
Results		P	P	P	P	P	P	P	P

T.4 Shock

Start time: 2018/10/25 10:50		Ambient temp.: 23.9 °C						Operator: Mia	
Finish time: 2018/10/25 15:30		Sample 01	Sample 02	Sample 03	Sample 04	Sample 05	Sample 06	Sample 07	Sample 08
OCV (V)	Before	16.906	16.944	16.935	16.936	16.899	16.920	16.930	16.936
	After	16.901	16.935	16.928	16.924	16.886	16.915	16.924	16.927
	Residual OCV %	99.97%	99.95%	99.96%	99.93%	99.92%	99.97%	99.96%	99.95%
Mass (g)	Before	207.591	207.486	207.508	207.558	207.536	207.591	207.608	207.545
	After	207.591	207.484	207.507	207.558	207.535	207.588	207.605	207.543
	Mass loss %	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%	0.00%
Results		P	P	P	P	P	P	P	P

Form No. : W11-002-B05

本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效，本報告分離使用無效

This test report is valid only to the items, Invalid for separation using.



新普科技股份有限公司
新世電子(常熟)有限公司
新普科技(重慶)有限公司
華普電子(常熟)有限公司

Control Number: SLEU-2008008

T.5 External Short Circuit

Start time: 2018/10/25 15:50	Ambient temp.: 23.8 °C				Operator: Mia			
Finish time: 2018/10/26 09:00	Sample 01	Sample 02	Sample 03	Sample 04	Sample 05	Sample 06	Sample 07	Sample 08
OCV (V)	Before	16.901	16.935	16.928	16.924	16.886	16.915	16.924
	After	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Resistance (<100mΩ)		59.2	56.8	58.3	60.5	61.2	57.9	58.4
Max Temp. (< 170°C)		57.4	57.2	57.7	57.6	57.6	57.5	57.3
Results		P	P	P	P	P	P	P

T.6 Impact / Crush (Component Cell)

UN38.3/ST/SG/AC.10/11/Rev.6/Amend.1

☐ Impact - Cylindrical cells not less than 18.0 mm in diameter

☒ Crush - Prismatic, pouch, coin/button cells and cylindrical cells less than 18.0 mm in diameter

Start time: 2020/08/03 08:54	Ambient temp.: 24.8 °C				Operator: Mia			
Finish time: 2020/08/03 12:00	Sample 01C	Sample 02C	Sample 03C	Sample 04C	Sample 05C			
Initial OCV (V)	3.809	3.815	3.801	3.812	3.808			
Max Temp. (< 170°C)	23.2	23.9	24.0	23.5	24.3			
Results	P	P	P	P	P			
Sample No.	Sample 06C	Sample 07C	Sample 08C	Sample 09C	Sample 10C			
Initial OCV (V)	3.814	3.819	3.804	3.802	3.811			
Max Temp. (< 170°C)	24.7	24.1	23.8	23.9	23.6			
Results	P	P	P	P	P			


T.7 Overcharge

Start time: 2018/10/23 09:00	Ambient temp.: 24.0 °C				Operator: Mia			
Finish time: 2018/10/31 10:30	Sample 09	Sample 10	Sample 11	Sample 12	Sample 13	Sample 14	Sample 15	Sample 16
Initial OCV (V)	17.110	17.129	17.133	17.143	17.103	17.122	17.140	17.135
Results	P	P	P	P	P	P	P	P

T.8 Forced Discharge (Component Cell)

Start time: 2018/10/23 10:30	Ambient temp.: 23.8 °C				Operator: Mia			
Finish time: 2018/10/31 13:00	Sample 11C	Sample 12C	Sample 13C	Sample 14C	Sample 15C	Sample 16C	Sample 17C	Sample 18C
Initial OCV (V)	3.482	3.467	3.462	3.475	3.471	3.489	3.470	3.458
Results	P	P	P	P	P	P	P	P
Sample No.	Sample 19C	Sample 20C	Sample 21C	Sample 22C	Sample 23C	Sample 24C	Sample 25C	Sample 26C
Initial OCV (V)	3.450	3.463	3.477	3.486	3.481	3.452	3.483	3.448
Results	P	P	P	P	P	P	P	P
Sample No.	Sample 27C	Sample 28C	Sample 29C	Sample 30C				
Initial OCV (V)	3.473	3.476	3.440	3.466				
Results	P	P	P	P				

9. Test Sample:

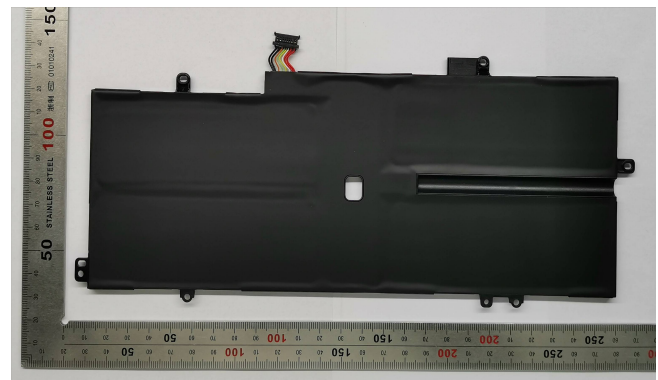

Form No. : W11-002-B05

本資料為新普科技股份有限公司之智慧財產權，非經本公司書面授權許可，不得透露或使用本資料，亦不得複印、複製或轉變成其它任何形式使用。
The information contained herein is the exclusive property of SIMPLO TECHNOLOGY CO., LTD, and shall not be distributed, reproduced, or disclosed in whole or in part without prior written permission.

本測試報告僅對上述測試項目有效，本報告分離使用無效

This test report is valid only to the items, Invalid for separation using.