



# 检验报告 TEST REPORT

NAME OF SAMPLE: Rechargeable Li-ion Battery

产品名称: 锂离子电池组

CLIENT: SUNWODA Electronic Co., Ltd.

委托单位: 欣旺达电子股份有限公司

**CLASSIFICATION OF TEST: Commission test** 

检验类别: 委托测试





Shenzhen Precise Testing Technology Co., Ltd

Report No.: S-18090096 Page 2 of 16 Applicant information 申请资料 Name of samples: Rechargeable Li-ion Battery 样品名称: 锂离子电池组 Type/ Model: L18D3PF1 11.25V 3175mAh /35Wh(Rated) 3280mAh /36Wh(Typical) 型号规格: Lithium content:: 锂含量: Trade mark: 商标: Commission by: SUNWODA Electronic Co., Ltd. 委托单位: 欣旺达电子股份有限公司 Floor 1,A,B,D District of Floor 2 and Floor 3 to 9 of Comprehensive Commissioner address: 委托单位地址: Building, No.2 Yihe Road, Shilong Community, Shiyan Street, Bao'an District, Shenzhen City, Guangdong Province, P.R. China 中国广东省深圳市宝安区石岩街道石龙社区颐和路2号综合楼1楼、2楼A-B区、 2楼D区3-9楼 Sunwoda Electronic Co., Ltd. Sixth Branch Factory: 生产厂: 欣旺达电子股份有限公司第六分公司 Factory address: Northeast of Intersection of Keyu Road and Tongguan Road, Gongming Street, Guangming New District, Shenzhen City, Guangdong 生产厂地址: Province, P.R. China 中国广东省深圳市光明新区公明街道科裕路与同观大道交汇处东北 Appearance: Black 样品外观颜色: 黑色 Sample status: Good 样品状态: 完好 Package of goods: Carton 样品外包装: 纸箱 Quantity of sample: 41pcs 样品数量: Sample identification:  $b1#\sim b16#$ 样品标识序号:  $c1#\sim c25#$ Receiving date: 2018-09-17 接样日期:

测试完成日期: Conclusion/结论:

Completing date:

The submitted samples comply with the requirements of UNITED NATIONS Section 38.3 Of The Sixth Revised Edition Of The Recommendations On The Transport Of Dangerous Goods, Manual Of Test And Criteria(ST/SG/AC.10/11/Rev.6 Section 38.3)

样品符合联合国《关于危险货物运输的建议书 试验和标准手册》第六修订版第38.3节的要求

Seal/检验专用章:

Date of issue: 2018.09.28

Approved: 批准:

汤发

2018-09-28

Reviewed 审核:

孝仙姐

Testec

测试

来踊昂



Report No.: S-18090096

# 深圳普瑞赛思检测技术有限公司

Shenzhen Precise Testing Technology Co., Ltd

Page 3 of 16

Test Conclusion测试结论								
No.	Name of test		Test result	Conclusion	Remarks			
序号	测试项目名称		测试结果	本项结论	备注			
1	Altitude simulation 高度模拟	See A	See Appendix 1	Р				
2	Thermal test 温度试验		See Appendix 2	Р				
3	Vibration 振动		See Appendix 3	Р				
4	Shock 冲击	requirements of UNITED NATIONS Section 38.3 Of The Sixth Revised Edition Of The Recommendations On	See Appendix 4	Р				
5	External Short-circuit 外部短路	The Transport Of Dangerous Goods, Manual Of Test And Criteria(ST/SG/AC.10/11/ Rev.6 Section 38.3) 样品符合联合国《关于危险	See Appendix 5	Р				
6	Crush 挤压	货物运输的建议书 试验和标准手册》第六修订版第 38.3节的要求。	See Appendix 6	Р				
ŭ	Impact 撞击		See Appendix 6	N/A				
7	Overcharge 过度充电		See Appendix 7	Р				
8	Forced discharge 强制放电		See Appendix 8	Р				



Shenzhen Precise Testing Technology Co., Ltd

Report No.: S-18090096 Page 4 of 16

#### Photos of samples and markings

样品及标识片

Battery (L18D3PF1 11.25V 3175mAh /35Wh(Rated) 3280mAh /36Wh(Typical))







Report No.: S-18090096

### 深圳普瑞赛思检测技术有限公司

Shenzhen Precise Testing Technology Co., Ltd


Page 5 of 16

#### Photos of samples and markings

样品及标识照片

Battery (L18D3PF1 11.25V 3175mAh /35Wh(Rated) 3280mAh /36Wh(Typical))



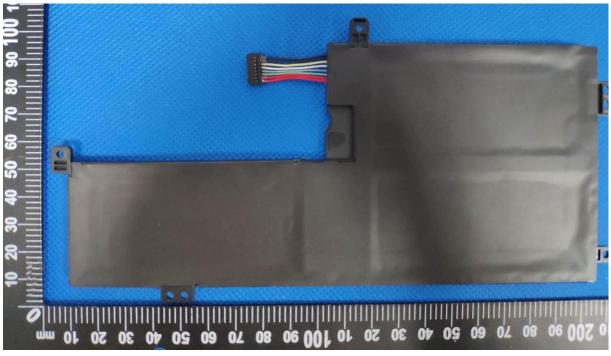



Shenzhen Precise Testing Technology Co., Ltd


Report No.: S-18090096

Page 6 of 16

# Photos of samples and markings

样品及标识片

#### Cell (CA594285HV 3175mAh 11.90Wh)

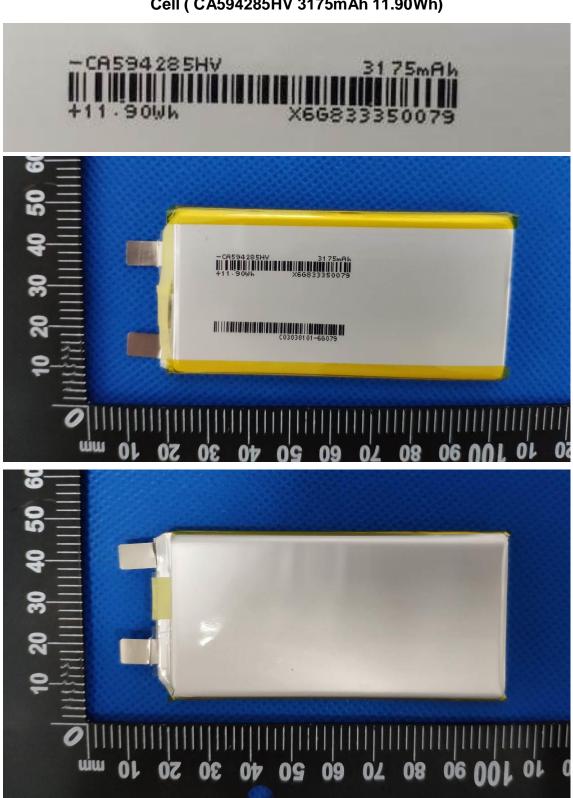



Shenzhen Precise Testing Technology Co., Ltd

Report No.: S-18090096 Page 7 of 16

				endix 1 表 1					
Test Items	Altituda sina	latia.a	<u> </u>	<u> </u>					
测试项目	高度模拟								
1.1	Test procedure 测试步骤								
	Test cells and batteries shall be stored at a pressure of 11.6kPa or less for at least six hours at ambient temperature (20±5℃). 试验电池芯和电池在环境温度(20±5℃)下,储存在小于等于11.6kPa的压力下至少六小时。								
1.2	Sample sta 样品状态	itus							
		at first cycle i 在第一个循环	n fully charged 忘全充电;	states;					
		after 50 cycle 在第五十个循	s ending in fully f环完全充电;	/ charged state	es;				
1.3	Result 测试结果								
Sample No. 样品编号	Before To	est测试前	After Test测试后		After Test测试后		Mass loss 质量损失 (M<1g: 0.5%	Residual OCV 剩余电压	Test result 测试结果
	Mass 样品质量 (g)	Voltage 开路电压 (V)	Mass 样品质量(g)	Voltage 开路电压 (V)	1g≤M≤75g: 0.2% M>75g: 0.1%)	(≥90%)			
b1#	159.28	12.992	159.27	12.978	0.006	99.89	0		
b2#	159.27	12.990	159.25	12.975	0.013	99.88	0		
b3#	158.72	12.990	158.70	12.975	0.013	99.88	0		
b4#	159.20	12.986	159.18	12.971	0.013	99.88	0		
b5#	159.45	12.984	159.44	12.970	0.006	99.89	0		
b6#	159.84	12.977	159.81	12.410	0.019	95.63	0		
b7#	159.40	12.982	159.40	12.554	0.000	96.70	0		
b8#	159.16	12.983	159.15	12.968	0.006	99.88	0		

Note: L-Leakage, V-Venting, D-Disassembly, R-Rupture, F-Fire, O-No leakage, no venting, no disassembly, no rupture, no fire.

注: L- 泄漏; V- 排气; D- 解体; R- 破裂; F- 起火; O- 无泄漏、无排气、无解体、无破裂、无起火。



b5#

b6#

b7#

b8#

159.44

159.81

159.40

159.15

12.970

12.410

12.554

12.968

#### 深圳普瑞赛思检测技术有限公司

Shenzhen Precise Testing Technology Co., Ltd

Report No.: S-18090096 Page 8 of 16

Report I	Report No.: S-18090096 Page 8 of 16							
Appendix 2								
				附表 2				
Test Items 测试项目	Thermal tes 温度测试	t						
1.1	Test procedure 测试步骤							
	Test cells and batteries are to be stored for at least six hours at a test temperature equal to 72±2℃, followed by storage for at least six hours at a test temperature equal to -40±2℃, The maximum time interval between test temperature extremes in 30 minutes, This procedure is to be repeated until 10 total cycles are complete, after which all test cells and batteries are to be stored for 24 hours at ambient temperature (20±5℃). 将电芯和电池在温度为72±2℃的条件下贮存不少于6个小时,然后,在温度-40±2℃条件下贮存不少于6个小时,两个温度间的间隔最长为30min,重复操作上述步骤直到10次,然后,将其在环境温度为20±5℃的条件下放置24个小时。							
1.2	Sample status 样品状态 b1# ~ b4#, at first cycle in fully charged states; b1# ~ b4#, 在第一个循环完全充电; b5# ~ b8#, after 50 cycles ending in fully charged states;							
1.3	Result 测试结果	在第五十个循	147元王兀屯;					
Sample No. 样品编号	Before Te Mass 样品质量 (g)	est测试前 Voltage 开路电压 (V)	After Te Mass 样品质量 (g)	st测试后 Voltage 开路电压 (V)	Mass loss 质量损失 (M<1g: 0.5% 1g≤M≤75g: 0.2% M>75g: 0.1%)	Residual OCV 剩余电压 (≥90%)	Test result 测试结果	
b1#	159.27	12.978	159.26	12.770	0.006	98.40	0	
b2#	159.25	12.975	159.25	12.767	0.000	98.40	0	
b3#	158.70	12.975	158.70	12.774	0.000	98.45	0	
b4#	159.18	12.971	159.17	12.758	0.006	98.36	0	
1	1	1	1	1	1	l	1	

Note: L-Leakage, V-Venting, D-Disassembly, R-Rupture, F-Fire, O-No leakage, no venting, no disassembly, no rupture, no fire.

12.767

11.506

12.150

12.762

0.000

0.000

0.013

0.006

98.43

92.72

96.78

98.41

0

0

0

注: L- 泄漏; V- 排气; D- 解体; R- 破裂; F- 起火; O- 无泄漏、无排气、无解体、无破裂、无起火。

159.44

159.81

159.38

159.14



b7#

b8#

159.38

159.14

12.150

12.762

## 深圳普瑞赛思检测技术有限公司

Shenzhen Precise Testing Technology Co., Ltd

Report No.: S-18090096 Page 9 of 16

Report	No.: S-1809009	6			Pag	je 9 of 16		
			• '	pendix 3				
			β	付表 3				
Test Items 测试项目	Vibration 振动							
1.1	Test procedure 测试步骤							
	cells in such wave form w minutes, Thi perpendicula 将电芯和电 200Hz,然后	a manner as vith a logarithr is cycle shall l ar mounting p 池牢固地安装	to faithfully to mic sweep be be repeated 1 osition of the 在振动台的f 'Hz为一个循环	ransmit the vil tween 7 Hz a 2 times for a cell. 台面上,然后 不,一个循环持	of the vibration mac pration, The vibration nd 200 Hz and back total of 3 hours for ea 开始振动。振动以正 持续15分钟的对数扫想	shall be a sin to 7 Hz travers ach of three m 弦波形式,以	usoidal sed in 15 utually \7Hz增加至	
1.2		tus at first cycle in 在第一个循环		d states;				
	b5# ~ b8#, a		s ending in ful	lly charged sta	ates;			
1.3	测试结果							
Sample No. 样品编号	Before Test测试前		After Test测试后		Mass loss 质量损失 (M<1g: 0.5%	Residual OCV 剩余电压	Test result 测试结果	
	Mass 样品质量 (g)	Voltage 开路电压 (V)	Mass 样品质量 (g)	Voltage 开路电压 (V)	1g≤M≤75g: 0.2% M>75g: 0.1%)	(≥90%)		
b1#	159.26	12.770	159.26	12.758	0.000	99.91	0	
b2#	159.25	12.767	159.24	12.755	0.006	99.91	0	
b3#	158.70	12.774	158.70	12.652	0.000	99.04	0	
b4#	159.17	12.758	159.17	12.732	0.000	99.80	0	
b5#	159.44	12.767	159.43	12.755	0.006	99.91	0	
b6#	159.81	11.506	159.81	11.487	0.000	99.83	0	
							_	

Note: **L**-Leakage, **V**-Venting, **D**-Disassembly, **R**-Rupture, **F**-Fire, **O**-No leakage, no venting, no disassembly, no rupture, no fire.

12.129

12.746

0.000

0.006

99.83

99.87

0

0

注: L- 泄漏; V- 排气; D- 解体; R- 破裂; F- 起火; O- 无泄漏、无排气、无解体、无破裂、无起火。

159.38

159.13



b7#

b8#

159.38

159.13

12.129

12.746

### 深圳普瑞赛思检测技术有限公司

Shenzhen Precise Testing Technology Co., Ltd

Report	No.: S-18090096	3			Page	10 of 16	
			Appe	endix 4			
			附是	表 4			
Test Items 测试项目	Shock 冲击						
1.1	Test procedure 测试步骤						
	Test cells and batteries shall be secured to the testing machine, and each cell shall be subjected to a half-sine shock of peak acceleration of $150g_n$ and pulse duration of 6 milliseconds. Large cells may be subjected to a half-sine shock of peak acceleration of $50g_n$ and pulse duration of 11 milliseconds. Small batteries shall be subjected to a half-sine shock of peak acceleration of $150g_n$ (or Acceleration( $g_n$ )= $\sqrt{\frac{100080}{mass}}$ , which is smaller) and pulse duration of 6 milliseconds, large batteries shall be subjected to a half-sine of peak acceleration of $50g_n$ (or Acceleration( $g_n$ )= $\sqrt{\frac{10000}{mass}}$ , which is						
	shocks in the	positive direc	tion followed b	y three shoc	ell or battery shall be ks in the negative di for a total of 18 sho	rection of thre	
	速度撞击,脉	冲持续6毫秒,	大型电芯须经到	受最大加速度	适。对每个电芯以峰 50gn和脉冲持续时间	<b>11</b> 毫秒的半]	E弦波冲击。
	对每个电池以峰值为150gn(或与《mass》中的较小值)的半正弦的加速度撞击,脉冲持续6毫秒,大型电池组须经受最大加速度50gn(或与《mass》中的较小值)和脉冲持续时间11毫秒的半正弦波冲击。每个电池或电池组须在三个互相垂直的电池安装方位的正方向经受三次冲击,接着在反方向经受三次冲击,总共经受18次冲击。						
1.2	Sample stat 样品状态	us					
		t first cycle in f 生第一个循环完		tates;			
	1	fter 50 cycles o 在第五十个循环		charged state	es;		
1.3	Result 测试结果						
Sample No. 样品编号	Before Te	est测试前	After Tes	st测试后	Mass loss 质量损失 (M<1g: 0.5%	Residual OCV 剩余电压	Test result 测试结果
	Mass 样品质量 (g)	Voltage 开路电压 (V)	Mass 样品质量 (g)	Voltage 开路电压 (V)	1g≤M≤75g: 0.2% M>75g: 0.1%)	(≥90%)	
b1#	159.26	12.758	159.24	12.751	0.013	99.95	0
b2#	159.24	12.755	159.24	12.748	0.000	99.95	0
b3#	158.70	12.652	158.69	12.652	0.006	100.00	0
b4#	159.17	12.732	159.17	12.725	0.000	99.95	0
b5#	159.43	12.755	159.43	12.748	0.000	99.95	0
b6#	159.81	11.487	159.80	11.484	0.006	99.97	0
	i .	1	1	i	i	1	1

Note: L-Leakage, V-Venting, D-Disassembly, R-Rupture, F-Fire, O-No leakage, no venting, no disassembly, no rupture, no fire.

12.084

12.740

0.000

0.000

99.63

99.95

0

0

注: L- 泄漏; V- 排气; D- 解体; R- 破裂; F- 起火; O- 无泄漏、无排气、无解体、无破裂、无起火。

159.38

159.13



Shenzhen Precise Testing Technology Co., Ltd

Report No.: S-18090096 Page 11 of 16

		Appendix 5						
	T=	附表 5						
Test Items 测试项目	上xternal short 外部短路							
1.1	Test procedu 测试步骤	re						
	temperature recondition with condition is condition is condition is condition is condition to be concluded 保持试验环境没下,将其正负权	The cell or battery to be tested shall be temperature stabilized so that its external case temperature reaches 57±4℃ and then the cell or battery shall be subjected to a short circuit condition with a total external resistance of less than 0.1 ohm at 57±4℃, This short circuit condition is continued for at least one hour after the cell or battery external case temperature has returned to 57±4℃, the cell or battery must be observed for a further six hour for the test to be concluded. 保持试验环境温度稳定在57±4℃,以使电芯或电池样品外表温度达到57±4℃,然后,在此温度下,将其正负极用小于0.1欧姆的线路短接,待电芯或电池的外表温度恢复到57±4℃之后再持续个小时以上,对电芯或电池必须进一步观察6个小时才能下结论。						
1.2 Sample status 样品状态 b1#~b4#, at first cycle in fully charged states;								
	b1# ~ b4#, 在第一个循环完全充电; b5# ~ b8#, after 50 cycles ending in fully charged states; b5# ~ b8#, 在第五十个循环完全充电;							
1.3	Result 测试结果	79-IL						
	lle No. 编号	Max. External Temperature 样品表面最高温度 (℃)	Test result 测试结果	Remar 备注				
b	1#	57.6	0					
b	2#	57.4	0					
b:	3#	57.5	0					
b	4#	57.8	0					
b	5#	57.4	0					
b	6#	57.8	0					
b.	7#	57.4	0					
L	 8#	57.6 <b>O</b>						

注: D- 解体; R- 破裂; F- 起火; OT- 超过170℃; O- 无解体、无破裂、无起火、不超过170℃



Shenzhen Precise Testing Technology Co., Ltd

Report No.: S-1809							
	Appendix 6						
<del>-</del>	附表 6						
Test Items	Crush 挤压/Impact 撞击						
测试项目							
1.1	Test procedure						
	测试步骤						
	Crush 挤压						
	A cell or component cell is to be crushed between two flat surfaces. The crushing is						
	to be gradual with a speed of approximately 1.5 cm/s at the first point of contact. The						
	crushing is to be continued until the first of the three options below is reached.						
	(a) The applied force reaches 13kN±0.78kN;						
	(b) The voltage of the cell drops by at least 100 mV; or						
	(c) The cell is deformed by 50% or more of its original thickness.						
	Once the maximum pressure has been obtained, the voltage drops by 100mV or						
	more, or the cell is deformed by at least 50% of its original thickness, the pressure						
	shall be released.						
	电池芯或组成电池芯在两个平面间挤压。挤压在第一个接触点以约1.5cm/s 的速度慢慢						
	进行,直到下面三个选项之一达到为止:						
	(a)作用力达到 13kN±0.78kN;						
	(b)电池芯电压降至少达到100mV;						
	(c)电池厚度和最初比较变形至少50%。						
	一旦达到最大压力,电压降超过100 mV或者电池芯变形超过50%,压力应该解除。						
	Impact 撞击						
	(applicable to cylindrical cells not less than 18mm in diameter)						
	The sample cell or component cell is to be placed on a flat smooth surface. A 15.8						
	mm ± 0.1 mm diameter, at least 6 cm long, or the longest dimension of the cell,						
	whichever is greater, Type 316 stainless steel bar is to be placed across the centre						
	of the sample. A 9.1 kg $\pm$ 0.1 kg mass is to be dropped from a height of 61 $\pm$ 2.5 cm						
	at the intersection of the bar and sample in a controlled manner using a near						
	Frictionless, vertical sliding track or channel with minimal drag on the falling mass.						
	The vertical track or channel used to guide the falling mass shall be oriented 90						
	degrees from the horizontal supporting surface.						
	The test sample is to be impacted with its longitudinal axis parallel to the flat surface						
	and perpendicular to the longitudinal axis of the 15.8 mm $\pm$ 0.1 mm diameter curved						
	surface lying across the centre of the test sample. Each sample is to be subjected to						
	only a single impact.						



Shenzhen Precise Testing Technology Co., Ltd

Report No.: S-18090096 Page 13 of 16

Appendix 6						
Test Items	附表 6 Crush 挤压/Impact 撞击					
测试项目	Crash Maximpast En					
7,7,1,7	Cells and component cells meet this requirement if their external temperature does					
	not exceed 170°C and there is no o	•	•			
	six hours after this test.	,	.g			
	   (适用于直径不小于18毫米的圆柱形	电池)将电池或元件电池样品	品平放在一个平面上,			
	   其纵轴平行于测试台面年,将一直名	经为15.8 mm ± 0.1 mm的316	型不锈钢棒横放在电池			
	   中心位置。然后,将一质量为9.1 kg	g ± 0.1 kg的物体从61±2.5 cn	n的高度落向样品。样			
	   品在进行试验时,其外表温度应不起。	-				
	解体、无起火现象发生。		· · · · · · · · · · · · · · · · · · ·			
1.2	Sample status		_			
2	样品状态					
	c1# ~ c5#, at first cycle at 50% of the design rated capacity; c1# ~ c5#, 在第一个循环50%的额定容量;					
1.3	Result					
	测试结果					
Sample No.	Max. External Temperature	Test result	Remark			
样品编号	样品表面最高温度	测试结果	备注			
	(℃)					
c1#	23.6	0				
c2#	23.7	0				
c3#	23.8	o				
c4#	23.9	o				
c5#	23.5	0				

Note:  ${\bf D}$  -Disassembly,  ${\bf R}$  -Rupture,  ${\bf F}$ -Fire,  ${\bf OT}$  -Over Temperature,  ${\bf O}$ - no disassembly, no fire, no Over temperature

注: D- 解体; R- 破裂; F- 起火; OT- 超过170℃; O-无解体、无起火、不超过170℃



Shenzhen Precise Testing Technology Co., Ltd

Report No.: S-18090096 Page 14 of 16

	Appendix	1			
Took Home					
Test Items 测试项目	Overcharge 过度充电				
1.1	Test procedure 测试步骤				
	When the manufacturer's recommended voltage of the test shall be the lesser of the 22V, whichever is less. When the manufacturer's recommended to the test shall current is 2 times of the maximum charged 如果厂家推荐的充电电压不超过18V,本电压或者是22V,取其中较小者。如果厂的厂家标定最大充电电压。充电电流为厂	two times the maximum cha facturer's recommended char be 1.2 times maximum charg jing current recommended b 测试的最小充电电压应该是i 家推荐的充电电压超过18V,	arge voltage of the or rge voltage is more the re voltage. The charg by the manufacturer。 两倍的厂家标定最大 充电电压应该为 1.		
1.2	Sample status 样品状态				
	b9#~b12#. 在第一个循环完全至电。				
1.3	b9# ~ b12#, 在第一个循环完全充电; b13# ~ b16#, after 50 cycles ending in fu b13# ~ b16#, 在第五十个循环完全充电; Result	•			
<b>1.3</b> Sample No. 样品编号	b13# ~ b16#, after 50 cycles ending in fu b13# ~ b16#, 在第五十个循环完全充电;	•	Remark 备注		
Sample No.	b13#~b16#, after 50 cycles ending in fo b13#~b16#, 在第五十个循环完全充电; Result 测试结果 Voltage Before test(V)	Test result			
Sample No. 样品编号	b13#~b16#, after 50 cycles ending in fo b13#~b16#, 在第五十个循环完全充电; Result 测试结果 Voltage Before test(V) 测试前开路电压(V)	Test result 测试结果			
Sample No. 样品编号 b9#	b13#~b16#, after 50 cycles ending in fob13#~b16#, 在第五十个循环完全充电;  Result 测试结果  Voltage Before test(V) 测试前开路电压(V)  4.305	Test result 测试结果 O			
Sample No. 样品编号 b9# b10#	b13#~b16#, after 50 cycles ending in ft b13#~b16#, 在第五十个循环完全充电;  Result 测试结果  Voltage Before test(V) 测试前开路电压(V)  4.305  4.308	Test result 测试结果 O			
Sample No. 样品编号 b9# b10# b11#	b13#~b16#, after 50 cycles ending in fob13#~b16#, 在第五十个循环完全充电;  Result 测试结果  Voltage Before test(V) 测试前开路电压(V)  4.305  4.308  4.309	Test result 测试结果 O O			
Sample No. 样品编号 b9# b10# b11# b12#	b13# ~ b16#, after 50 cycles ending in fob13# ~ b16#, 在第五十个循环完全充电;  Result 测试结果  Voltage Before test(V) 测试前开路电压(V)  4.305  4.308  4.309  4.306	Test result 测试结果 O O			
Sample No. 样品编号 b9# b10# b11# b12# b13#	b13#~b16#, after 50 cycles ending in ft b13#~b16#, 在第五十个循环完全充电;  Result 测试结果  Voltage Before test(V) 测试前开路电压(V)  4.305  4.308  4.309  4.306	Test result 测试结果 O O O			

注: D- 解体; F- 起火; O-无解体、无起火。



Shenzhen Precise Testing Technology Co., Ltd

Report No.: S-18090096 Page 15 of 16

Appendix 8							
			長 8				
Test Items 测试项目	Forced discharge 强制放电						
1.1	Test procedure 测试步骤						
	Each cell shall be forced discharged at ambient temperature by connecting it in series with a 12V D. C, power supply at an initial current equal to the maximum discharge current specified the manufacturer The specified discharge current is to be obtained by connecting a resistive load of the appropriate size and rating in series with the test cell, Each cell shall be forced discharged for a time interval(in hours) equal to its rated capacity divided by the initial test current(in ampere).  在20±5℃的环境温度下,将单个电芯连接在12V的直流电源上进行强制放电,此直流电源提供每个电芯初始电流为制造厂指定的最大放电电流,放电时间为额定容量除以初始电流。						
1.2	Sample status 样品状态						
	c6#~c15#, at first cycle in fully discharged states; c6#~c15#, 在第一个循环完全放电;						
	c16# ~ c25#, 在第		ding in fully discharge 全放电;	ed states;			
1.3	Result 测试结果						
Sample No. 样品编号	Voltage Before test 测试前开路电压 (V)	Test result 测试结果	Sample No. 样品编号	Voltage Before test 测试前开路电压 (V)	Test result 测试结果		
c6#	3.402	0	c16#	3.405	0		
c7#	3.459	0	c17#	3.403	0		
c8#	3.403	0	c18#	3.408	0		
c9#	3.410	0	c19#	3.417	0		
c10#	3.397	0	c20#	3.372	0		
c11#	3.459	0	c21#	3.402	0		
c12#	3.435	0	c22#	3.384	0		
c13#	3.458	0	c23#	3.400	0		
c14#	3.433	0	c24#	3.406	0		
c15#	3.441	0	c25#	3.405	0		

Note: **D** -Disassembly, **F**-Fire, **O**- no disassembly, no fire.

注: D- 解体; F- 起火; O-无解体、无起火。



Shenzhen Precise Testing Technology Co., Ltd

Report No.: S-18090096

Page 16 of 16

# 注 意 事 项 Attention

1. 本报告无检测单位"检验专用章"无效。

The test report is invalid without the official stamp of the lab.

- 2. 未经本实验室书面同意,不得部分地复制本报告。
  Nobody is allowed to photocopy or partly photocopy this report without written permission of the lab.
- 3. 本报告无批准人、审核人签名无效。
  The test report is invalid without the signature of ratifier, reviewer.
- **4.** 本报告涂改无效。
  The test report is invalid if altered.
- 5. 如果报告中部分项目相对于测试依据有偏离的,将在当前测试项目中予以说明。
  If any test method is deviation from the designated test method, must be commented in the test data sheet.
- 6. 对检测报告若有异议,应于收到报告之日起十五天内向检测单位提出。 Objections to the test report must be submitted to lab within 15 days.
- 7. 本报告仅对送检样品负责。
  The test report is valid for the tested sample only.
- 8. 本检测结果中"N/A"表示"不适用","P"表示"通过","F"表示"不通过"。
  As for the test result "N/A" means "Not Applicable", "P" means "Pass" and "F" means "Fail".

深圳普瑞赛思检测技术有限公司

Shenzhen Precise Testing Technology Co., Ltd.

深圳市宝安区石岩街道石龙社区颐和路 2 号 A 栋 1-2 楼

1-2 floor, building A, No.2, Yihe Rd., Shilong Community, Shiyan Street, Baoan

District, Shenzhen City, China

TEL: 0755-23084910

E-mail: precise@ptl-global.com URL: http://www.ptl-global.com

\*\*\*报告结束\*\*\* \*\*\*END\*\*\*