



CONFIDENTIAL

**LG Chem, Ltd.**

128, Yeoui-daero, Yeongdeungpo-gu,  
Seoul, Korea

Certification & Evaluation Team  
Tel: 82-42-870-6195, Fax: 82-42-863-0182  
If any of pages is not legible or has not been received,  
please notify our office for re-transmission

## CERTIFICATE OF COMPLIANCE

The following product has been evaluated according to the 5<sup>th</sup> revised edition Amendment2 of the UN Manual of Tests and Criteria.

We, LG Chem, Ltd., hereby certify that this battery meets the requirements of the regulation for transportation of lithium-ion cells and batteries and single cell batteries.

<input type="checkbox"/> Lithium-ion cell <input checked="" type="checkbox"/> Lithium-ion battery <input type="checkbox"/> Lithium-ion single cell battery	
Model name	<b>L16L2PB3</b>
Cell Model name	<b>ICP595490A1</b>
Nominal voltage	<b>7.6 V</b>
Electric power capacity	<b>35 Wh</b>
Lithium Equivalent Contents	<b>1.383 g</b>

Conducted By: Min Je Woo

Reviewed By: Dae Ho Nam

Assistant Manager  
Global Standard Certification Part  
LG Chem, Ltd.  
E-mail: [milkis@lgchem.com](mailto:milkis@lgchem.com)

Senior Manager  
Global Standard Certification Part  
LG Chem, Ltd.  
E-mail: [kkammy@lgchem.com](mailto:kkammy@lgchem.com)

Document Number	QDI-161122-B-L16L2PB3	
Prepared	MyeongHoon Choi	<i>Choi</i>
Reviewed	MinJe Woo	<i>[Signature]</i>
Approved	DaeHo Nam	<i>[Signature]</i>

# UN38.3 Test Report

## - L16L2PB3 (Nom.35Wh, 7.6V)-


### Index

- 1. UN38.3 Test Condition
- 2. General Information
- 3. Test Result
- 4. Sample Image

2016. 11. 22



# 1. UN38.3 Test Condition

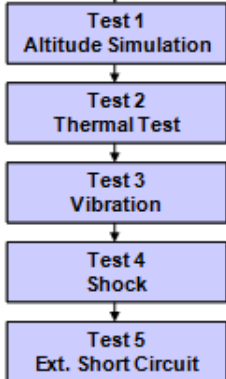Test item	Test Condition	Requirements	Etc.
Test 1. Altitude Simulation	Storing at (low pressure)11.6kPa for 6hr at 20+/-5℃	<ul style="list-style-type: none"> <li>- After OCV (%) ≥ 90%</li> <li>- No leakage, no venting, no disassembly, no rupture, no fire</li> <li>- Mass loss limit (leakage)               <ol style="list-style-type: none"> <li>1) If <math>M &lt; 1g</math>, less than 0.5%,</li> <li>2) If <math>1g \leq M \leq 75g</math>, less than 0.2%,</li> <li>3) If <math>M &gt; 75g</math>, less than 0.1%</li> </ol> </li> </ul>	T1~T5 : Sequence Tests   <pre>           graph TD             T1[Test 1 Altitude Simulation] --&gt; T2[Test 2 Thermal Test]             T2 --&gt; T3[Test 3 Vibration]             T3 --&gt; T4[Test 4 Shock]             T4 --&gt; T5[Test 5 Ext. Short Circuit]           </pre>
Test 2. Thermal Test	[72±2℃,6hr ↔ -40±2℃,6hr, interval max. 30min] x 10cycle Storing at 20±5℃ for 24h		
Test 3. Vibration	[7Hz↔200Hz↔7Hz, in 15min] x 12 times x 3 direction 1) sinusoidal waveform with a logarithmic sweep 2) 7Hz 18Hz (maintaining 1gn) app. 50Hz (until 8gn) 200Hz (maintaining 8gn), 1.6mm total excursion		
Test 4. Shock	Half sine shock (peak acceleration : 150gn, pulse duration : 6msec) x 6 (±x, y, z), direction x 3 cycle		
Test 5. External Short Circuit	100mΩ ext. short-circuit at 55±2℃ 1hr continue after returning at 55±2℃		
Test 6. Impact	Φ=15.8±0.1mm bar, 9.1±0.1kg mass, 61±2.5cm height	<ul style="list-style-type: none"> <li>- No disassembly, no fire within 6 hours after the test</li> <li>- Max. Temp ≤ 170℃</li> </ul>	for cylindrical cells (not less than 18mm diameter)
Test 6. Crush	Crushing rate :1.5cm/s, until 13kN±0.78kN or 100mV drop or 50% deformation		for cylindrical cells (less than 18mm diameter) for prismatic, pouch, coin/button cells
Test 7. Overcharge	Current = Manufacturer's recommended max. continuous charge current X 2 Voltage 1.If charge voltage ≤ 18V, V (min.) = 2 x (max. charge voltage) or 22V. 2.If charge voltage > 18V, V (min.) = 1.2 x (max. charge voltage)	<ul style="list-style-type: none"> <li>- No disassembly, no fire within 7 days after the test</li> </ul>	Only for Single Cell Battery / Battery
Test 8. Forced Discharge	Discharge at max. discharge current (connecting in series with 12V DC power supply), Duration time = rated capacity/initial test current	<ul style="list-style-type: none"> <li>- No disassembly, no fire within 7 days after the test</li> </ul>	Resistance of Electric Loader 1/Ω = (max. discharge current) / (12 + Initial OCV)

## 2. General Information

### 1. Standard charge / discharge Condition

	Mode	Condition	End Condition
Charge	CC / CV	Current = 4480 mA Voltage = 8.7 V	Current = 225 mA
Discharge	CC	Current = 896 mA	Voltage = 6.0 V

### 2. Cycle Condition

	Mode	Condition	End Condition
Charge	CC / CV	Current = 4480 mA Voltage = 8.7 V	Current = 225 mA
Discharge	CC	Current = 896 mA	Voltage = 6.0 V

### 3. Test Condition

	Mode	Condition
Test 7. Overcharge	CC / CV	Max. Charge Current = 4500 mA CC/CV 2I <sub>max</sub> (9000mA) 17.4 V cut-off 24Hr
Test 8. Forced Discharge	CC	Max. Discharge Current = 9000 mA Duration Time = 30 min

# 3-1. T1-T4 Test Result

Before			Altitude (T1)					Thermal (T2)					Vibration (T3)					Shock (T4)				
NO.	OCV	Mass (g)	After OCV (V)	Mass (g)	After OCV(%)	Mass Loss(%)	Result	After OCV (V)	Mass (g)	After OCV(%)	Mass Loss(%)	Result	After OCV (V)	Mass (g)	After OCV(%)	Mass Loss(%)	Result	After OCV (V)	Mass (g)	After OCV(%)	Mass Loss(%)	Result

**A. 1st cycle fully charged state**

1	8.679	150.24	8.676	150.24	99.97	0.000	Pass	8.583	150.23	98.93	0.007	Pass	8.581	150.22	99.98	0.007	Pass	8.577	150.22	99.95	0.000	Pass
2	8.680	150.22	8.673	150.22	99.92	0.000	Pass	8.584	150.21	98.97	0.007	Pass	8.581	150.21	99.97	0.000	Pass	8.574	150.20	99.92	0.007	Pass
3	8.672	150.49	8.665	150.49	99.92	0.000	Pass	8.578	150.48	99.00	0.007	Pass	8.575	150.47	99.97	0.007	Pass	8.571	150.47	99.95	0.000	Pass
4	8.679	150.73	8.671	150.72	99.91	0.007	Pass	8.575	150.71	98.89	0.007	Pass	8.574	150.70	99.99	0.007	Pass	8.568	150.70	99.93	0.000	Pass

**B. 50th cycle fully charged state**

5	8.672	150.00	8.669	149.99	99.97	0.007	Pass	8.577	149.98	98.94	0.007	Pass	8.571	149.98	99.93	0.000	Pass	8.568	149.97	99.96	0.007	Pass
6	8.685	150.68	8.677	150.68	99.91	0.000	Pass	8.583	150.67	98.92	0.007	Pass	8.578	150.66	99.94	0.007	Pass	8.573	150.66	99.94	0.000	Pass
7	8.685	150.53	8.678	150.52	99.92	0.007	Pass	8.588	150.51	98.96	0.007	Pass	8.587	150.50	99.99	0.007	Pass	8.578	150.50	99.90	0.000	Pass
8	8.689	150.60	8.687	150.60	99.98	0.000	Pass	8.592	150.59	98.91	0.007	Pass	8.589	150.58	99.97	0.007	Pass	8.587	150.58	99.98	0.000	Pass

# 3-2. T5/T7 Test Result

## EXT.Short Circuit (T5)

NO.	Initial OCV(V)	Max. Temp (°C)	Result
-----	----------------	----------------	--------

### A. 1st cycle fully charged state

1	8.577	54.80	Pass
2	8.574	54.83	Pass
3	8.571	55.25	Pass
4	8.568	55.73	Pass

### B. 50th cycle fully charged state

5	8.568	55.65	Pass
6	8.573	54.78	Pass
7	8.578	55.62	Pass
8	8.587	55.88	Pass

## Over Charge (T7)

NO.	Initial OCV(V)	Max. Temp (°C)	Result
-----	----------------	----------------	--------

### A. 1st cycle fully charged state

9	8.640	24.68	Pass
10	8.642	25.06	Pass
11	8.646	24.94	Pass
12	8.647	23.60	Pass

## Over Charge (T7)

NO.	Initial OCV(V)	Max. Temp (°C)	Result
-----	----------------	----------------	--------

### B. 50th cycle fully charged state

13	8.623	23.57	Pass
14	8.620	23.71	Pass
15	8.624	24.30	Pass
16	8.629	23.96	Pass

# 3-3. T6/T8 Test Result (ICP595490A1)

Crush (T6)			
NO.	Initial OCV(V)	Max. Temp (°C)	Result

**A. 1st cycle 50% charged state**

C-1	3.822	20.45	Pass
C-2	3.823	20.52	Pass
C-3	3.823	21.43	Pass
C-4	3.824	20.80	Pass
C-5	3.824	22.09	Pass

Forced Discharge (T8)							
NO.	Initial OCV(V)	Max. Temp (°C)	Result	NO.	Initial OCV(V)	Max. Temp (°C)	Result

**A. 1st cycle fully discharged state**

C-6	3.221	103.92	Pass
C-7	3.218	116.05	Pass
C-8	3.230	105.14	Pass
C-9	3.219	98.71	Pass
C-10	3.231	113.00	Pass
C-11	3.221	94.48	Pass
C-12	3.212	103.91	Pass
C-13	3.208	105.73	Pass
C-14	3.248	97.84	Pass
C-15	3.256	99.20	Pass

**B. 50th cycle fully discharged state**

C-16	3.314	85.24	Pass
C-17	3.309	98.81	Pass
C-18	3.320	106.37	Pass
C-19	3.331	103.76	Pass
C-20	3.316	73.64	Pass
C-21	3.318	105.77	Pass
C-22	3.312	103.81	Pass
C-23	3.313	87.25	Pass
C-24	3.316	89.89	Pass
C-25	3.313	94.44	Pass

# 4. Sample Image



**Lenovo**

Lenovo is the trademark of Lenovo, used under license.  
 Lenovo 是联想集团所属企业的商标，根据许可使用。  
**Rechargeable Li-ion Battery**  
 锂离子电池组 21CP6/55/90  
**Model Name (型号/型号): L16L2PB3**  
 Manufactured By LGC  
 Cell made in China Pack processed in China  
 制造地: 中国 / 製造地: 中国 制造商: LG Chem, Ltd.

Rating: 7.6V --- TYP. 4610mAh/35Wh MIN. 4400mAh/34Wh  
 STORE BETWEEN 0°C-60°C 32°F-140°F  
 For use with Lenovo personal computer  
 EU contact : Lenovo, Einsteinova 21, 851 01 Bratislava, Slovakia  
**CAUTION : Replace with same type only.**  
 Use of another battery may present a fire or explosion  
**PLEASE REFER TO USER MANUAL OR FOLLOW LOCAL ORDINANCES AND/OR REGULATIONS FOR DISPOSAL**  
 请参考使用说明或者遵照相关法律规定处理废弃电池

PS E 7.6V 4400mAh  
 レノボ・ジャパン株式会社

额定容量: 4400mAh 充电限制电压: 8.7V

LG Chem (Nanjing) I&E Materials Co., Ltd.  
 制造商: LG Chem.(Nanjing) I&E Materials Co., Ltd.  
 연락처: 1670-0098  
 XJ000033-XXXXXX

**!** FARE MÅ IKKE ÅPNES ELLER UTSÆTTES FOR VÅRME OVER 100°C  
 PERIGRO NÃO ABRIRE NEM EXPORER A TEMPERATURAS SUPERIORES A 100°C  
 PERIGRO NÃO ABRIRE NEM EXPORER A AQUECIMENTO ACIMA DE 100°C  
 VORSICHT! NICHT REPARIEREN ODER ZERLEGEN MIT WASSER  
 IN BERÜHRUNG BRINGEN ODER ÜBER 100°C ERHITZEN  
**DANGER! DO NOT OPEN OR EXPOSE TO HEAT ABOVE 100°C**  
**DANGER! NE PAS OUVRIRE NI EXPOSER À PLUS DE 100°C**  
**GEVAAR! NIET OPENEN, NIET BLOOTSTELLEN AAN TEMPERATUUR BOVEN 100°C**

FARLIG! MÅ IKKE ÅPNES ELLER UDSÆTTES FOR TEMPERATUUR OVER 100°C  
 ATTENZIONE! NON APRIRE O RISCALDARE AD UNA TEMPERATURA SUPERIORE AI 100°C  
 FARA ÖPNA INTE BATTERIET OCH UTSÄTT DET INTE FÖR VÄRME ÖVER 100°C  
 VAARA ÄLÄRÄÄMÄÄNÄÄLÄÄ RISKIENNÄÄSÄ TU HUASTEN LÄMPÖLÄÄN  
**危険 発熱、発火、爆発の恐れがあるため。**  
 ●衝撃を与えないでください。  
 ●衝撃を与えたバッテリーパックは、使用をやめてください。  
 ●駆動時間が短くなったバッテリーパックは新しいものと交換してください。  
 ●分解・改造、火中への投入・100°C以上の加熱。  
 ●および高温での使用・充電をしないでください。  
 ●指定の充電方法以外で充電しないでください。  
 ●バッテリーパックの金属端子をショート(加熱)させないでください。

注意: 用錯誤型號電池更換會有爆炸危險  
 務必按照說明處置用完的電池

注意: 用錯誤型號電池更換會有爆炸危險  
 務必按照說明處置用完的電池

위험 본제품이 100°C 이상 가열하지 마십시오.  
**危険 禁止拆卸、發熱、失物墜落或投入火中。若出現嚴重故障，請勿繼續使用。**  
 請勿置于高溫環境中，電池液水在禁止使用!




廢電池請回收



EU 4400mAh



MH29581 LNA



TIS 2017-2048  
 Lenovo (Thailand) Limited



EU



R39088  
 7.6V/4400mAh  
 二次電池標識



US & Canada Only



Li-ion00

使用後はリサイクルへ